

# VHF DUPLEXER 130-174MHz

## N13000C-2C BAND PASS CAVITY TYPE DUPLEXER



### N13000C-2C

Color and Dimension change out of notice

### SPECIFICATIONS

**Frequency range :**130-174 MHz

**Frequency spacing :**(min) 300 KHz

**Temperature :**-30°C to +60°C

**Humidity :** 5% ~ 95%

**System impedance:** 50 ohms

**Tx to Rx isolation :** >75 dB

**No of Cavity :** 4

**Insertion loss:** (typ) 1.5 dB

**Power input / Pre-channel:** 200 watts

**Input VSWR:** (max) 1.2:1


**Impedance :** 50Ω

**Mounting :**19" Rack or Wall mounition

**Dimensions:** (HWD) 264\*483\*480mm +-10%

**Input/output connectors:** N-Female

**Net weight :(kg) < 9.5**

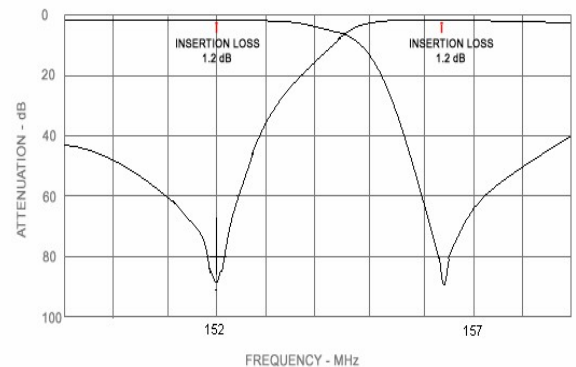

**ALWAYS**