


2. 外壳: (Shell): Nickel Plating 镀亮镍

- 材料: Material:
1. 塑胶: (Housing) : High Temperature Inertplastics, Ul 94V-0
  2. 端子: (Contact) : C2680
  3. 外壳: (Shell) : C2680
- 电鍍: (Finish) :
1. 端子: (Contact) : Plated Gold in Mating Area: Tin On Solder Tails
  2. 外壳: (Shell) : Nickel Plating 镀亮镍

产品规格说明: (specifications)  
电器特性: (Electrical characteristics)

- 最大值30毫欧: (30 milliohms MAX)
- 2. 耐电压: (Dielectric Withstanding Voltage:)  
500 伏特交流电 (500V AC At Sea Level)
- 3. 绝缘阻抗: (Insulation Resistance:)  
最小值1000兆欧姆 (1000 mega-ohms MIN)

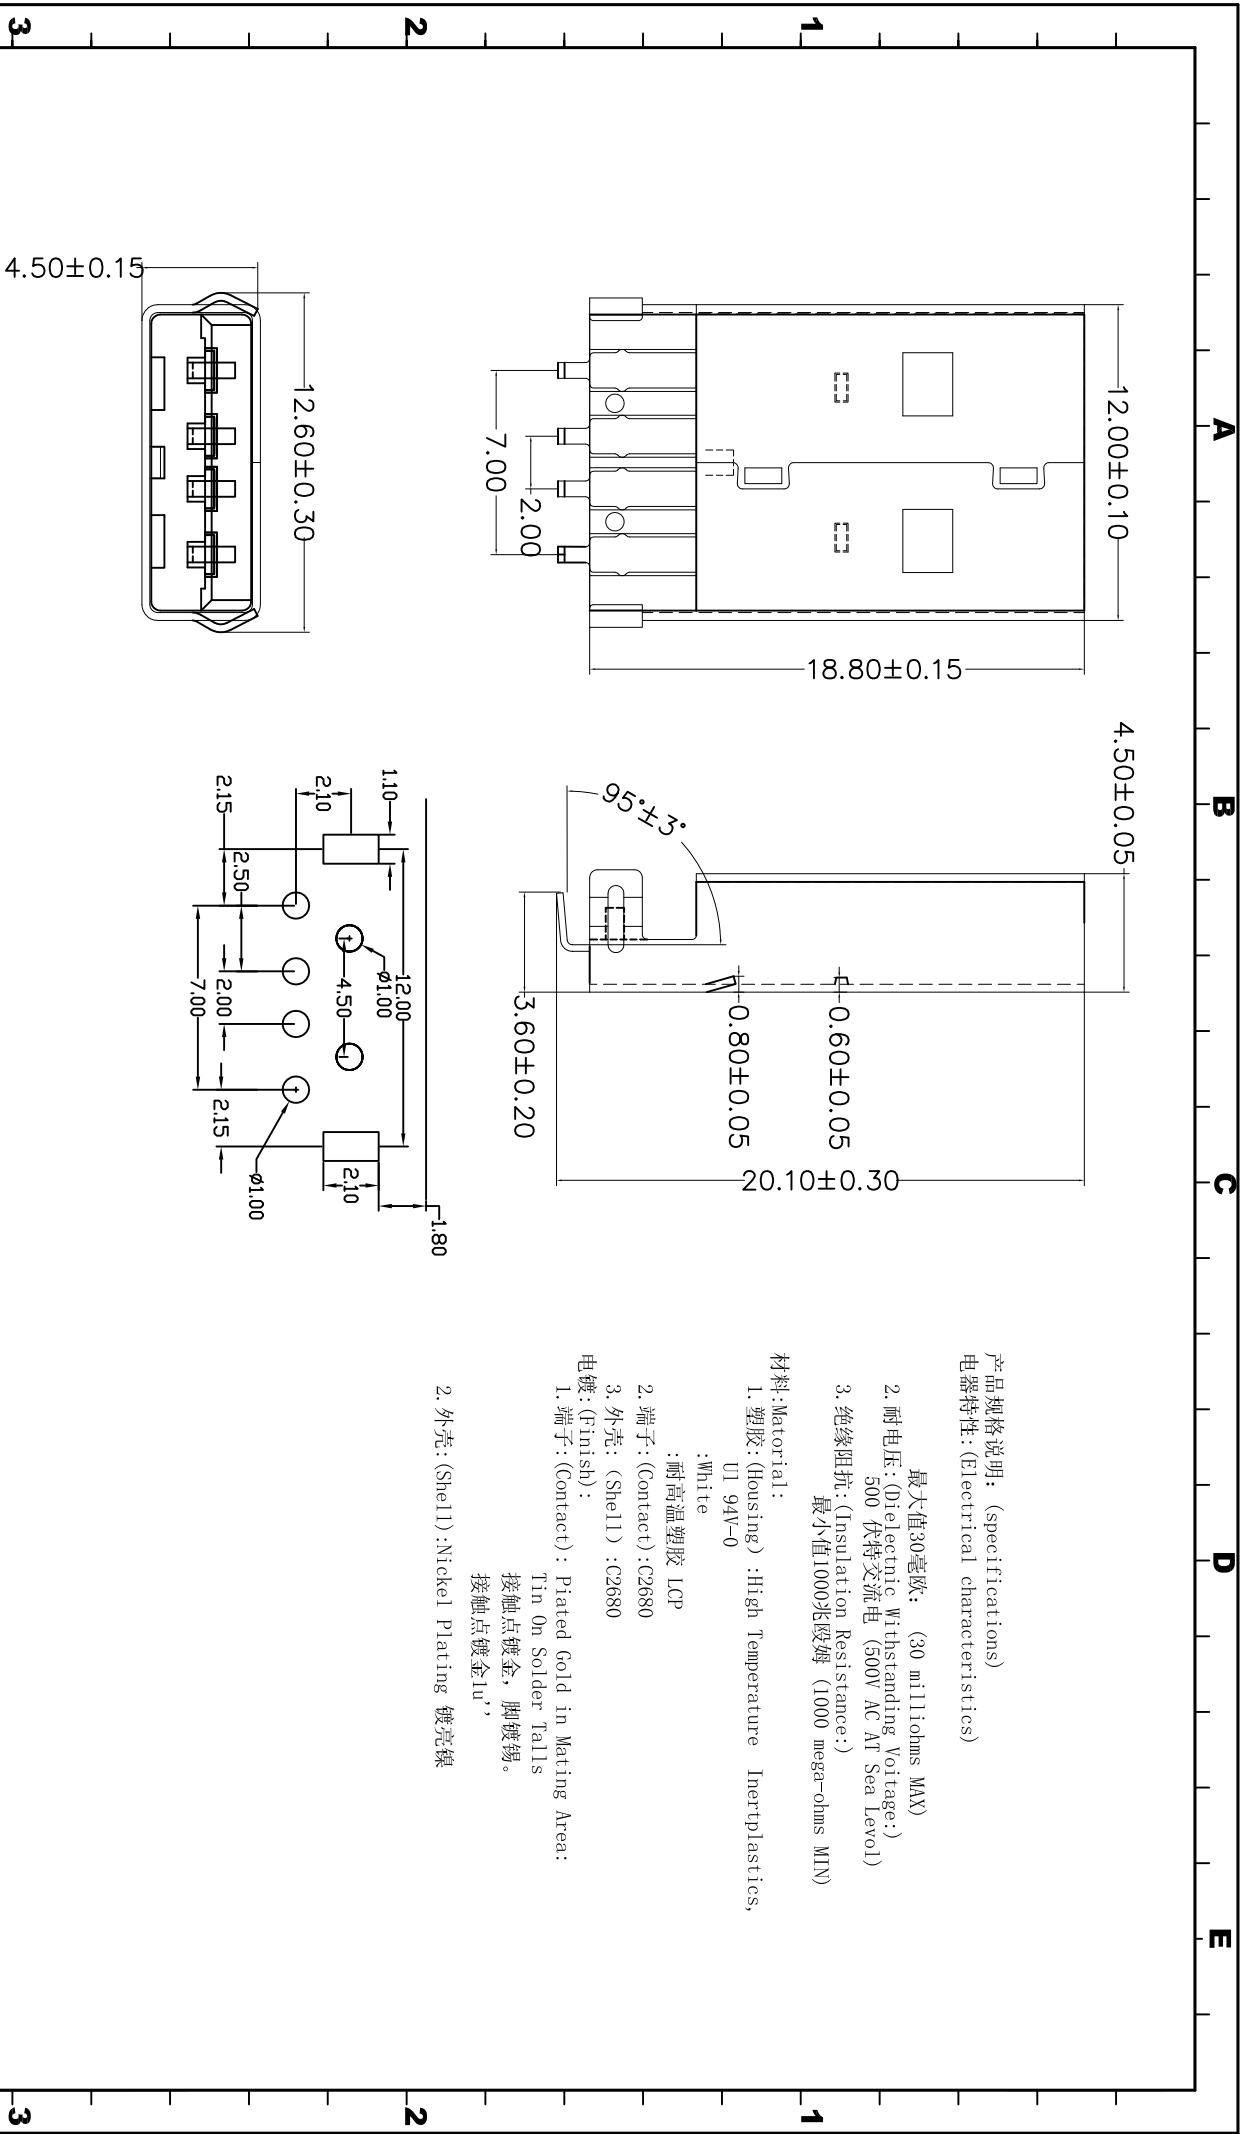

DESCRIPTION(内容) <b>USB A公 DIP RA 白膠 (LCP)</b> <b>鐵製定位柱 4PIN TYPE</b>		DRAWN(製圖) CHECKED(確認):		GENERAL TOLERANCE: (公差)		REV:		DESCRIPTION		DATE																			
PART NO: <b>USB-A-2141-0491N</b> (料號) DWG NO(圖號):		APPROVAL(核准):		<table border="1"> <tr> <td>X</td><td>±0.35</td><td>X</td><td>±5°</td></tr> <tr> <td>X</td><td>±0.30</td><td>X</td><td>±2°</td></tr> <tr> <td>XX</td><td>±0.20</td><td>XX</td><td>±1°</td></tr> <tr> <td>XXX</td><td>±0.10</td><td>XXX</td><td>±0.5°</td></tr> </table>		X	±0.35	X	±5°	X	±0.30	X	±2°	XX	±0.20	XX	±1°	XXX	±0.10	XXX	±0.5°	SCALE(比例): 1:XX		UNIT: mm		REV 1 2 3 4		2018.11.8	
X	±0.35	X	±5°																										
X	±0.30	X	±2°																										
XX	±0.20	XX	±1°																										
XXX	±0.10	XXX	±0.5°																										
凱帝企業有限公司 KABO ENTERPRISE CO., LTD.		鐵製定位柱 4PIN TYPE		X ±0.35 X ±5° X ±0.30 X ±2° XX ±0.20 XX ±1° XXX ±0.10 XXX ±0.5°		SHEET 1/1																							