

A

B

C

D

E

1







2

3

4

5


6

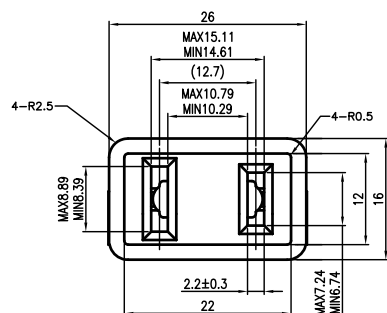

REVISIONS					
LTR	DESCRIPTION	DATE	REV.	CHKD.	APVD.
△x1	修正產品UL Logo	2006.06.27	鄭伍豐	李志堅/陸昌妹	蔡志祿
△x2	CSA安規認證修改, 文件編號與客戶一起表示增加UL認證編號	2008.06.27	鄭伍豐	李志堅/陸昌妹	蔡志祿
△x1	修改產品刻字料號 (ECR:C03150538)	2015.04.10	陳衛兵	張啟濤	陳宗碧
△x2	Cancel the CSA mark (CSA Reference No) ECR C03150547	2018.08.10	李阮龍	李阮龍	李阮龍

Characteristic :

1. Rating : AC 125V 15A
2. Contact Resistance : 50m Ohms Max
3. Insulation Resistance : 100M Ohms At DC 500V
4. Insulation Withstand Voltage :
AC 2000V r.m.s. For One Minute
5. Terminal Strength : 5kgs At One Minute
6. Insertion And Withdrawl Force :
A. Insertion Force : 6kgs Max
B. Withdrawl Force : 1.36-6 kgs
7. Life Test : 5000 Cycles MIN
- △△ 8. Approved Standard : UL&cUL File No E105348

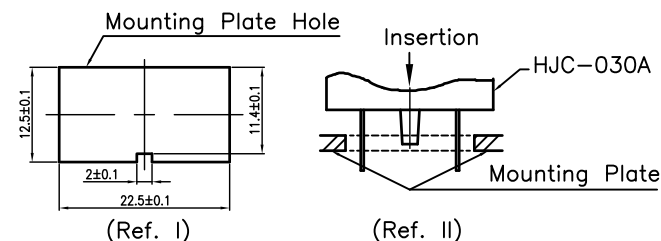

Material of Mounting Plate : Metal
Thickness of Mounting Plate : 0.8-1.2 mm

3	CONTACT B	1	C5191	t=0.40	MB:Cu Sn PLATED
2	CONTACT A	1	C5191	t=0.40	MB:Cu Sn PLATED
1	HOUSING	1	PP0(PX9406/PX9406P)	UL-94V-0	Black
LTR	PART NAME	Q'TY	MATERIAL		REMARK
120~315	±0.50	DWN	馮靜薇	DATE	2004.04.20
30~120	±0.35	DSND	姜鳳梅	DATE	1991.11.05
6~30	±0.22	CHKD	夏正雄	DATE	2004.04.21
BELOW 6	±0.16	APVD	夏正雄	DATE	2004.04.21
DIMENSION	TOLERANCE	KUNMING ELECTRONICS CO.,LTD.			NAME AC POWER SOCKET CAT. NO. HJC-030A-P DWN.NO. A-030A-P 1/1 D-001

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL:±0.3 ANGLES:±5°

The raw material specified by Sony should meet SS-00259 requirement of the latest version. When such material is used, it should be supplied by Sony designated suppliers.