
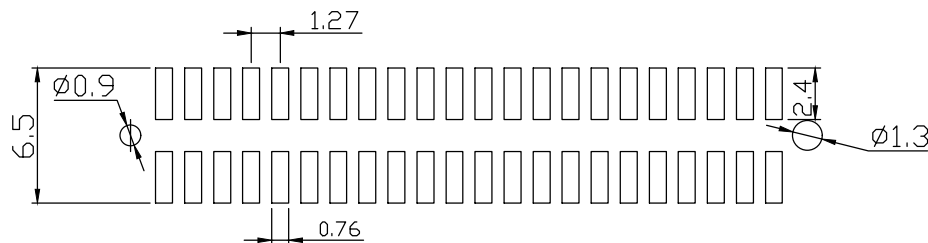
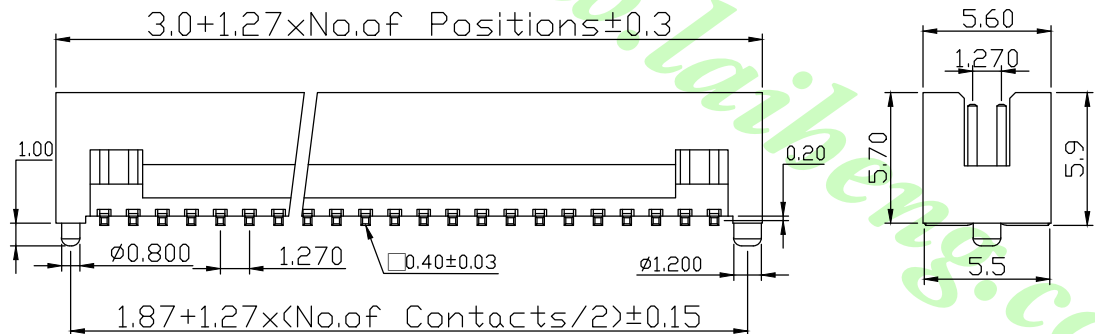


RoHS

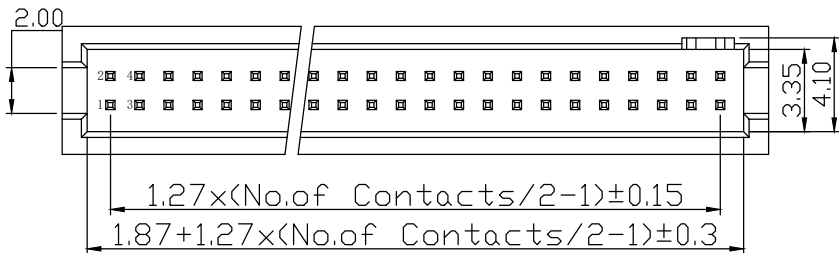

Specifications:

Current Rating: 1 Amps.
 Insulation Resistance: 1000 Megohms Min.
 Dielectric Withstanding: AC 500 V.
 Operating Temperature: -40°C ~ +105°C.
 Max Processing Temp: 230°C for 60 seconds.

Material:

Contact: Copper Alloy.
 Contact Plating: Gold Flash all over.
 Insulation: Nylon-6T, UL94V-0.
 Insulation Color: Black.

Part No:
LBH DN 127 T - XX - P H5.7

- Insulation Height : 5.7mm
- Pegs
- Number of Contacts: 20, 30, 40, 50
- SMT type
- Pitch: 1.27mm
- 塑膠兩側缺口
- Box Header

| | | | | | | |
|-----|-------------|--|--|---------------|---|--|
| | | 公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE | | 單位/Unit mm | 品名(Title): |  鍊亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL: (02) 8228-6487 FAX: (02) 8228-6486 |
| | | X. ±0.5 X° ±3° X.X ±0.3 .X° ±2° XX ±0.2 .XX° ±1° XXX ±0.1 .XXX° ±0.5° | | 比例/Scale Free | 料號/Part No: | |
| A0 | NEW DRAWING | 2019.07.26 | | Size A4 | 1.27mm Box Header SMT H:5.7 PEGS (塑膠兩側缺口) | |
| REV | 概述/REVISION | 日期/DATE | | | LBH DN 127 T - XX - PH5.7 | 圖號/Drawing No: MB127ESIGN-2XX-PT |
| | | | | | | 核對/APPD. Joe 審核/CHKD. Joe 製圖/DR. Mandy 報數/Sheet 1 of 1 |
| | | | | | | REV. A0 |