

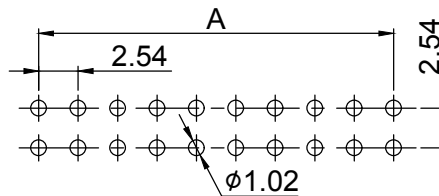
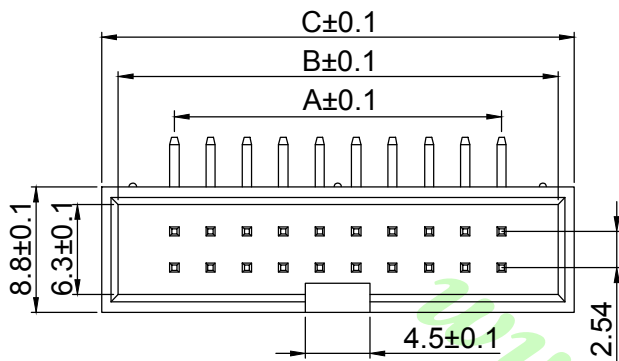
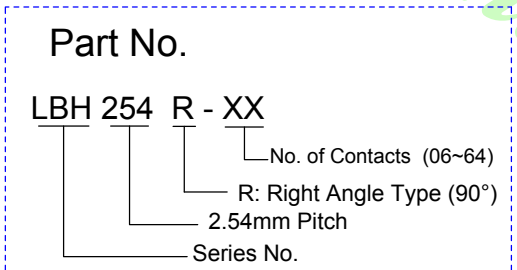
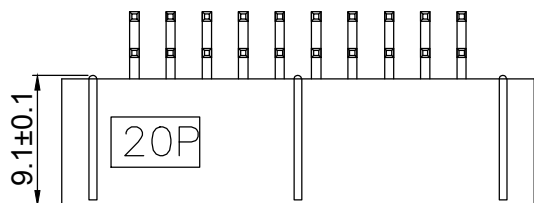


RoHS

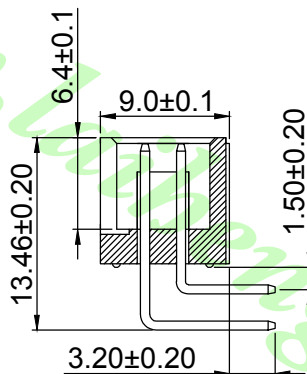

Recommended P.C.B. layout

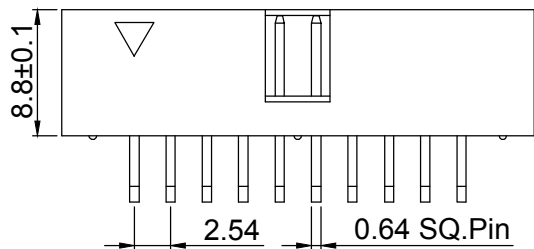

SPECIFICATIONS:

Current Rating: 3Amps.
 Insulator Resistance: 1000 Megohms min.
 Dielectric Withstanding: AC 500V.
 Operating Temperature: -40°C ~ +105°C.
 Contact Material: Brass.
 Insulator Material: P.B.T, UL94V-0.
 Finish: Gold Flash all over.

NO. of Contacts	Dimensions		
	A	B	C
06	5.08	12.94	15.24
08	7.72	15.48	17.78
10	10.16	18.02	20.32
12	12.70	20.56	22.86
14	15.24	23.10	25.40
16	17.78	25.64	27.94
20	22.86	30.72	33.02
24	27.94	35.80	38.10
26	30.48	38.34	40.64
30	35.56	43.42	45.72
34	40.64	48.50	50.80
40	48.26	56.12	58.42
42	50.80	58.66	60.96
44	53.34	61.20	63.50
50	60.96	68.82	71.12
60	73.66	81.52	83.82
64	78.74	86.60	88.90

		公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		單位/Unit	品名(Title):	鍊亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL: (02) 8228-6487 FAX: (02) 8228-6486
		.X ±0.30 .XX ±0.20 .XXX ±0.10 ANG. ±2°		mm 比例/Scale Free Size A4	2.54mm Box Header PCB Mount Right Angle Type (90°)	
A0	NEW DRAWING	2018.12.14			料號/Part No: LBH254R-XX	核對/APPD. 746
REV	概述/REVISION	日期/DATE			圖號/Drawing No: YH330-XX	審核/CHKD. Joe
						製圖/DR. Mandy
						報數/Sheet 1 of 1
						REV. A0