




RoHS

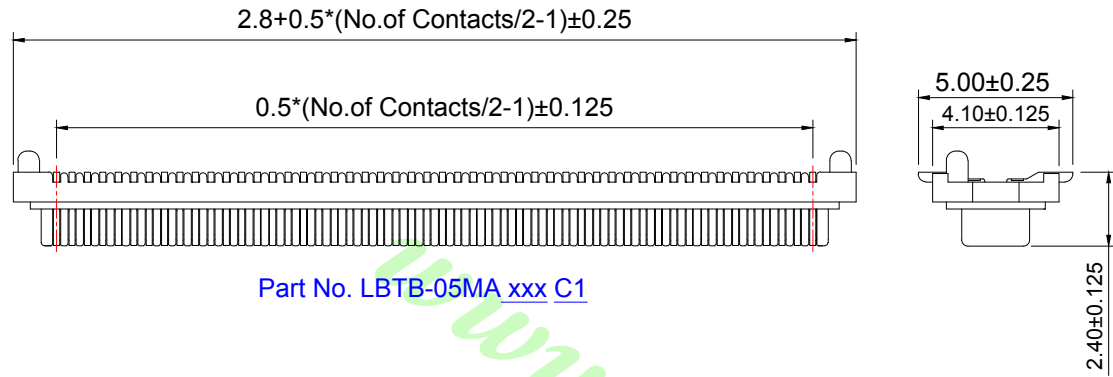

Part No. LBTB-05MA xxx C1

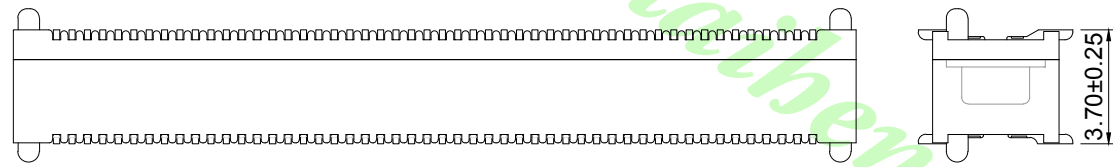


Part No: LBTB-05FA xxx C1

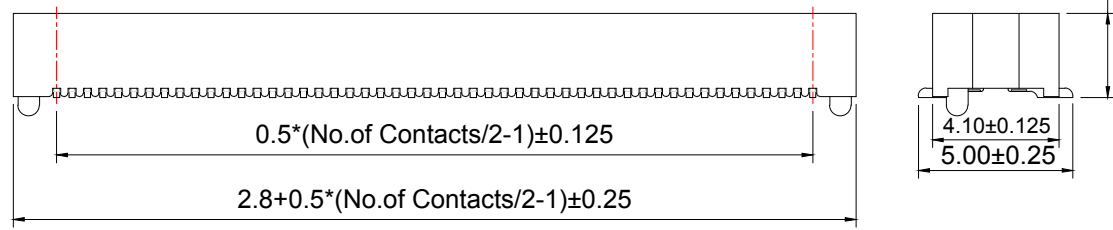


NOTE

- A. Material:
1. Housing : Nylon-9T Halogen Free, UL94V-0, Black
 2. Contact : Copper Alloy.
 3. Plating : Gold Plating.
- B. Temperature: -55 to +125°
- C. Electrical:
1. Voltage : 50V.
 2. Current : 0.5A.
 3. Contact Resistance : 40m Ω max.
 4. Dielectric Withstanding Voltage : 500V AC / 1 min.
 5. Insulation Resistance : 100M Ω min.





Available Pins : 20~100 Contacts

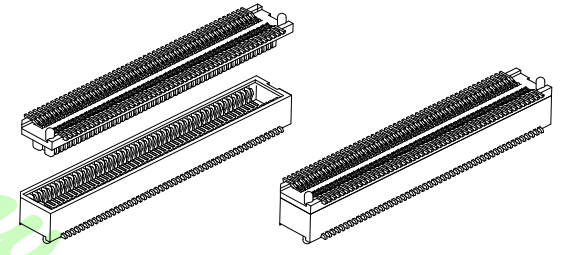


			公意/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		單位/Unit mm	品名/Title :	 鍊亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL:(02) 8228-6487 FAX:(02) 8228-6486					
			.X	±0.30	比例/Scale	0.50mm(0.0197") Pitch Board To Board Connector Male+Female H=3.50mm						
A0	NEW DRAWING	2019.08.20	.XX	±0.25	Free	料號/Part No :	圖號/Drawing No :	核加/APPD.	審核/CHKD.	製圖/DR.	張數/Sheet	REV.
REV	概述/REVISION	日期/DATE	.XXX	±0.10	Size A4			7/0	Joe	Mandy	1 of 3	A0

BTB-0535

RoHS

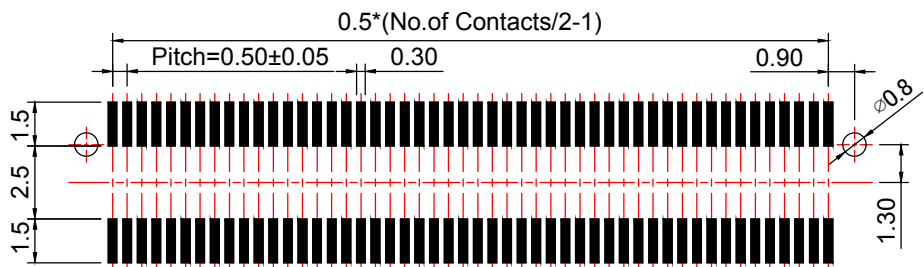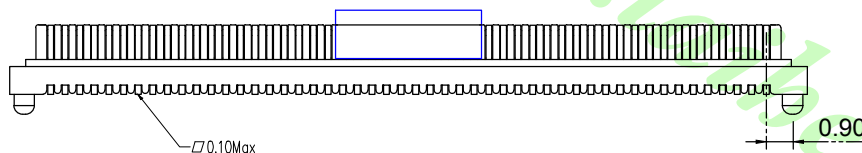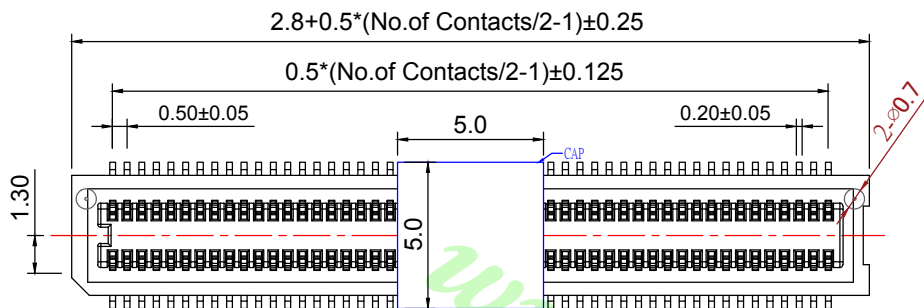

PCB Layout For Surface Mounting

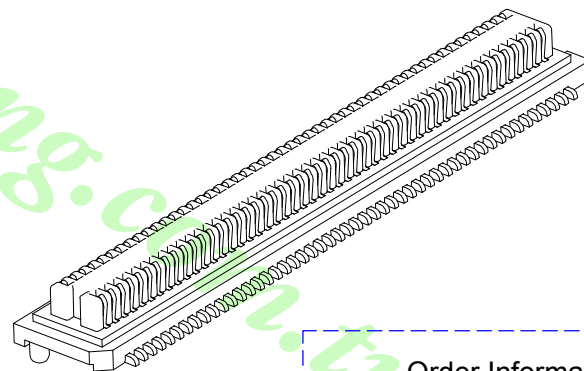

Order Information:

LBTB-05M A XXX C1

BTB Connector
Pitch 0.5mm
Male

C1:CAP

NO. of contacts:(020~100)

Insulation:
A:Height: 2.4mm Width: 4.10mm

NOTE

A. Material:

1. Housing : Nylon-9T Halogen Free, UL94V-0, Black
2. Contact : Copper Alloy.
3. Plating : Gold Plating.

B. Temperature: -55 to +125°

C. Electrical:

1. Voltage : 50V.
2. Current : 0.5A.
3. Contact Resistance : 40m Ω max.
4. Dielectric Withstanding Voltage : 500V AC / 1 min.
5. Insulation Resistance : 100M Ω min.





Available Pins : 20~100 Contacts

公認/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			單位/Unit mm	品名/Title : 0.50mm(0.0197") Pitch Board To Board Male Connector H=2.4mm
.X ±0.30			比例/Scale Free	料號/Part No : LBTB-05MAXXX C1
.XX ±0.25			Size A4	
.XXX ±0.10				圖號/Drawing No : BTB-05M-AXXX-C1
A0	NEW DRAWING	2019.08.20		
REV	概述/REVISION	日期/DATE		


鍊亨電子有限公司
 LAI HENG TECHNOLOGY LTD.
 TEL:(02) 8228-6487 FAX:(02) 8228-6486

核加/APPD. 7/6	審核/CHKD. Joe	製圖/DR. Mandy	張數/Sheet 2 of 3	REV. A0
-----------------	-----------------	-----------------	--------------------	------------

RoHS

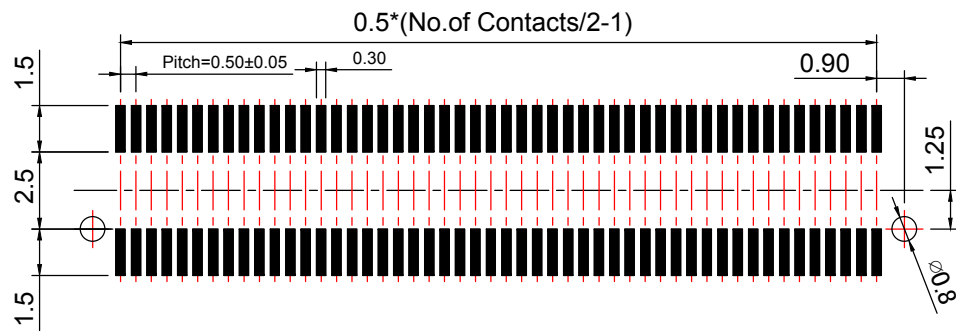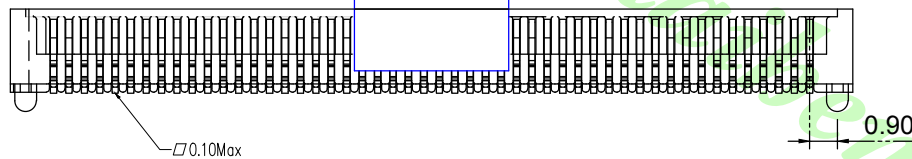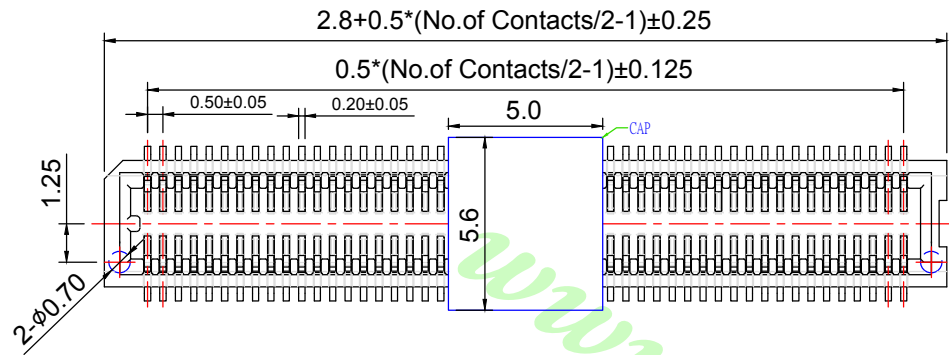


PCB Layout For Surface Mounting

NOTE

- A. Material:
 1. Housing : Nylon-9T Halogen Free, UL94V-0, Black
 2. Contact : Copper Alloy.
 3. Plating : Gold Plating.
- B. Temperature: -55 to +125°
- C. Electrical:
 1. Voltage : 50V.
 2. Current : 0.5A.
 3. Contact Resistance : 40m Ω max.
 4. Dielectric Withstanding Voltage : 500V AC / 1 min.
 5. Insulation Resistance : 100M Ω min.

Available Pins : 20~100 Contacts

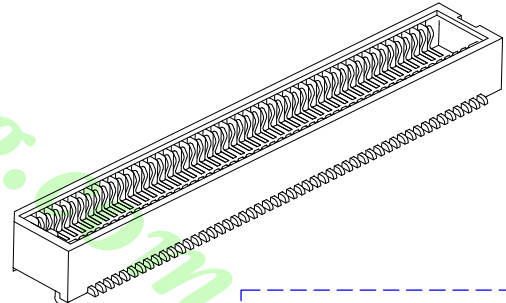

Order Information:

LBTB-05F A XXX C1

BTB Connector

Pitch 0.5mm Female

NO. of contacts:(020~100)

Insulation:
A:Height: 2.74mm Width: 4.10mm

公認/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			單位/Unit mm	品名/Title :
.X	±0.30	比例/Scale	Free	0.50mm(0.0197") Pitch Board To Board Female Connector H=2.74mm
.XX	±0.25	料號/Part No :	A4	LBTB-05FAXXX C1
.XXX	±0.10	圖號/Drawing No :		BTB-05F-AXXX-C1
A0	NEW DRAWING	2019.08.20		
REV	概述/REVISION	日期/DATE		

鍊亨電子有限公司
LAI HENG TECHNOLOGY LTD.

TEL:(02) 8228-6487 FAX:(02) 8228-6486

核准/APPD. Joe 審核/CHKD. Mandy 製圖/DR. Mandy 張數/Sheet 3 of 3

REV. A0