

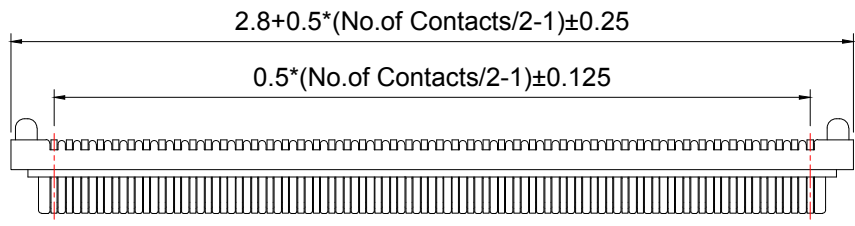





RoHS

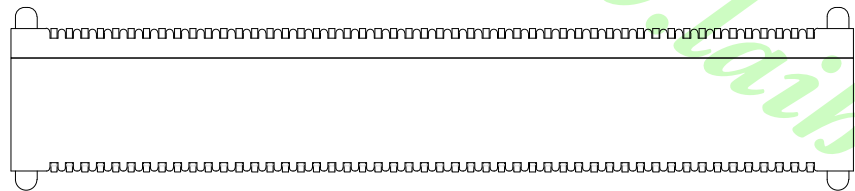

Part No: LBTB-05MA xxx C1



Part No:LBTB-05FB xxx C1

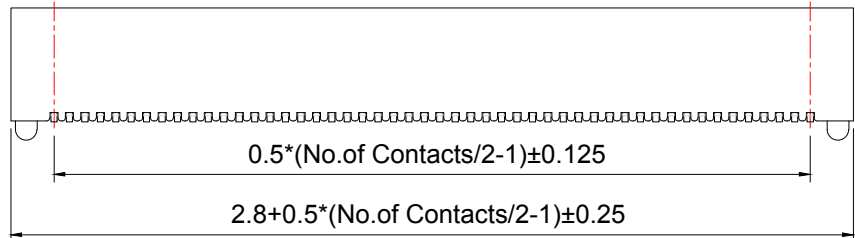

NOTE

A. Material:


1. Housing : Nylon-9T Halogen Free, UL94V-0, Black
2. Contact : Copper Alloy.
3. Plating : Gold Plating.

B. Temperature:-55 to +125°

C. Electrical:





1. Voltage : 50V.
2. Current : 0.5A.
3. Contact Resistance : 40m Ω max.
4. Dielectric Withstanding Voltage : 500V AC / 1 min.
5. Insulation Resistance : 100M Ω min.

Available Pins : 20~100 Contacts

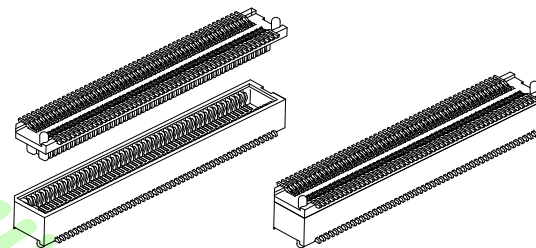


			公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		單位/Unit mm	品名/Title :	0.50mm(0.0197") Pitch Board To Board Connector Male+Female H=4.50mm		鍊亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL:(02) 8228-6487 FAX:(02) 8228-6486
			.X ±0.30	比例/Scale	Free	料號/Part No :	圖號/Drawing No :	核加/APPD. 740	
A0	NEW DRAWING	2019.08.20	.XX ±0.25	Size	A4			審核/CHKD. Joe	
REV	概述/REVISION	日期/DATE	.XXX ±0.10					製圖/DR. Mandy	
							張數/Sheet 1 of 3		
							REV. A0		

RoHS

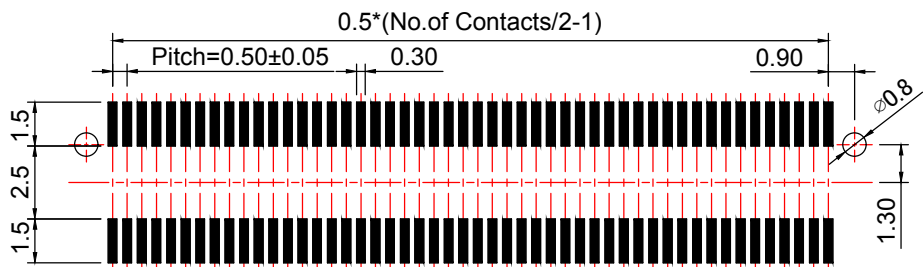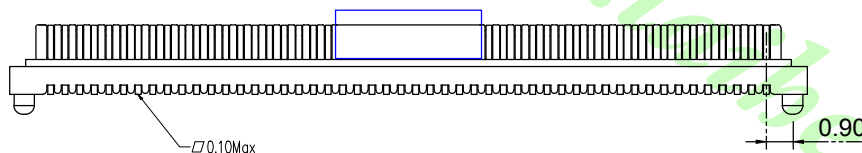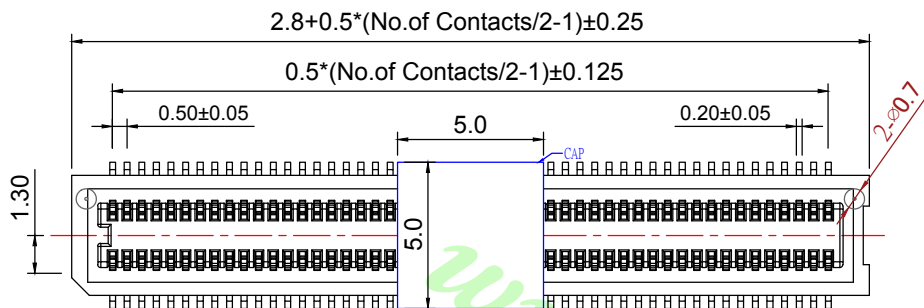

PCB Layout For Surface Mounting

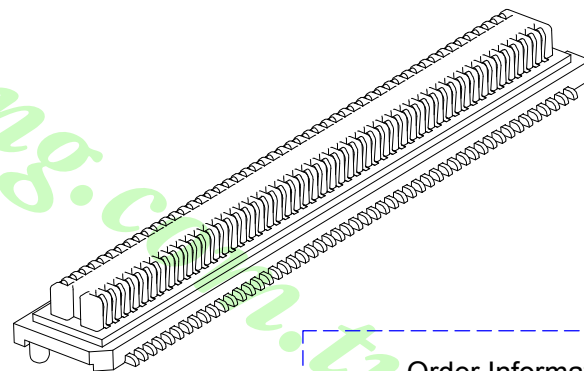

Order Information:

LBTB-05M A XXX C1

BTB Connector
Pitch 0.5mm
Male

C1:CAP

NO. of contacts:(020~100)

Insulation:
A:Height: 2.4mm Width: 4.10mm

NOTE

A. Material:

1. Housing : Nylon-9T Halogen Free, UL94V-0, Black
2. Contact : Copper Alloy.
3. Plating : Gold Plating.

B. Temperature: -55 to +125°

C. Electrical:

1. Voltage : 50V.
2. Current : 0.5A.
3. Contact Resistance : 40m Ω max.
4. Dielectric Withstanding Voltage : 500V AC / 1 min.
5. Insulation Resistance : 100M Ω min.





Available Pins : 20~100 Contacts

公認/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			單位/Unit mm	品名/Title :
			比例/Scale	0.50mm(0.0197") Pitch Board To Board Male Connector H=2.4mm
A0	NEW DRAWING	2019.08.20	Free	料號/Part No :
REV	概述/REVISION	日期/DATE	Size A4	LBTB-05MAXXX C1
			圖號/Drawing No :	BTB-05M-AXXX-C1


鍊亨電子有限公司
 LAI HENG TECHNOLOGY LTD.
 TEL:(02) 8228-6487 FAX:(02) 8228-6486

核加/APPD.	審核/CHKD.	製圖/DR.	張數/Sheet	REV.
7/6	Joe	Mandy	2 of 3	A0

RoHS

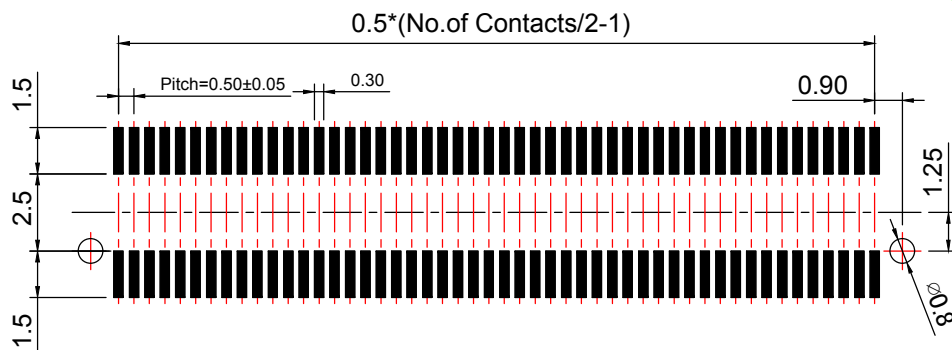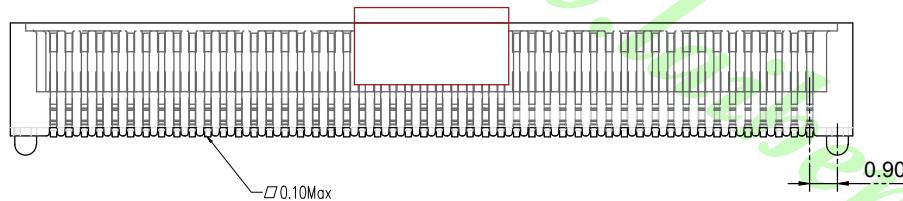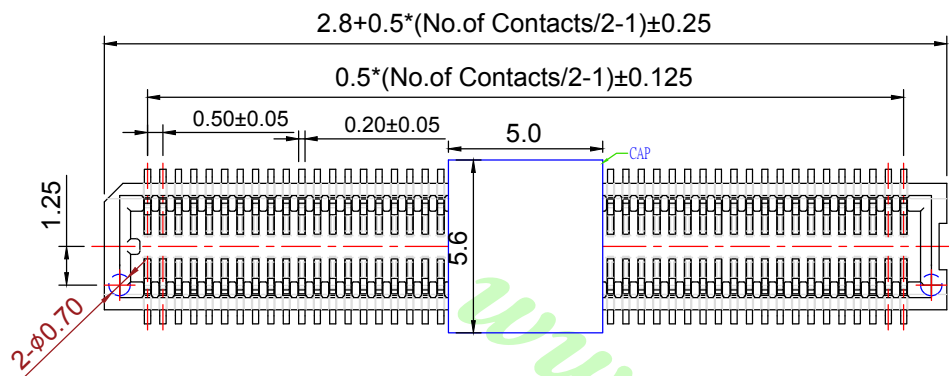


PCB Layout For Surface Mounting


NOTE

- A. Material:
1. Housing : Nylon-9T Halogen Free, UL94V-0, Black
 2. Contact : Copper Alloy.
 3. Plating : Gold Plating.
- B. Temperature: -55 to +125°
- C. Electrical:
1. Voltage : 50V.
 2. Current : 0.5A.
 3. Contact Resistance : 40m Ω max.
 4. Dielectric Withstanding Voltage : 500V AC / 1 min.
 5. Insulation Resistance : 100M Ω min.

Available Pins : 20~100 Contacts

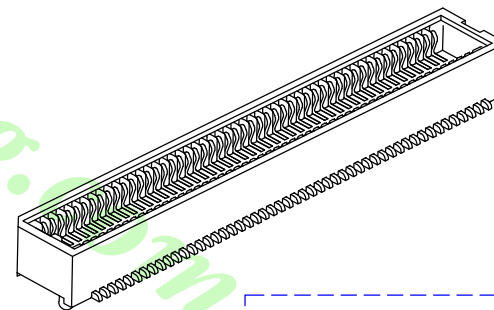

Order Information:

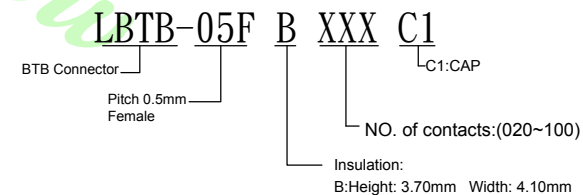

		公認/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		單位/Unit mm	品名/Title :
				比例/Scale	0.50mm(0.0197") Pitch Board To Board Female Connector H=3.70mm
A0	NEW DRAWING	2019.08.20	.X ±0.30	Free	料號/Part No :
REV	概述/REVISION	日期/DATE	.XX ±0.25	Size	A4
				圖號/Drawing No :	
				LBTB-05FB XXX C1	
				BTB-05F-BXXX-C1	


鍊亨電子有限公司
 LAI HENG TECHNOLOGY LTD.
 TEL:(02) 8228-6487 FAX:(02) 8228-6486

核准/APPD.	審核/CHKD.	製圖/DR.	張數/Sheet	REV.
740	Joe	Mandy	3 of 3	A0