

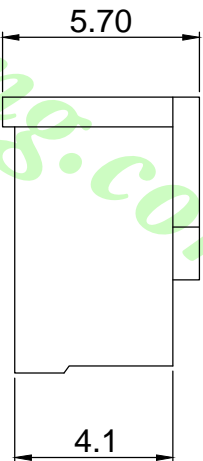
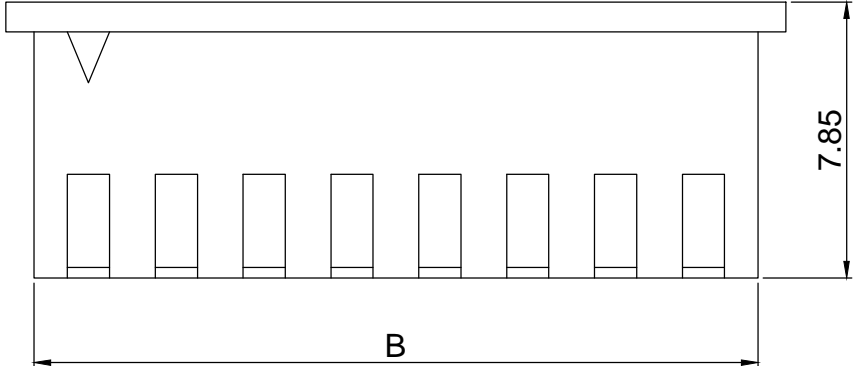


**SPECIFICATIONS**

Current rating : 3A AC,DC  
 Voltage rating : 250V AC,DC  
 Temperature range : -25°C to +85 °C  
 Contact resistance : 10mΩ Max.  
 Insulation resistance : 1000MΩ Min.  
 Withstanding voltage : 800V AC/minute  
 Material : Nylon 66, UL94V-0

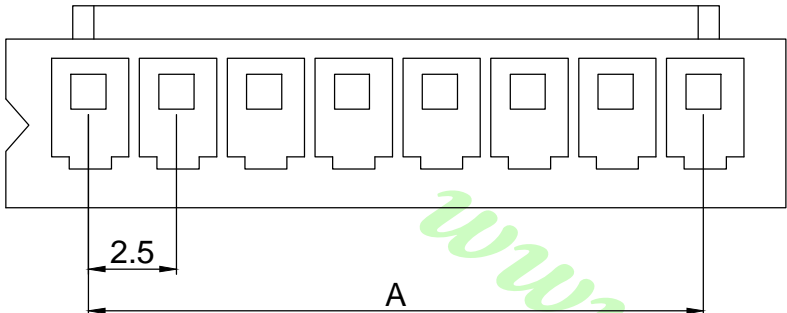

Poles	Dimension mm (in.)		Part No.
	A	B	
02	2.50 (0.098)	5.70(0.224)	LH-XH250-02
03	5.00 (0.197)	8.20(0.323)	LH-XH250-03
04	7.50 (0.295)	10.70(0.421)	LH-XH250-04
05	10.00 (0.394)	13.20 (0.520)	LH-XH250-05
06	12.50 (0.492)	15.70(0.618)	LH-XH250-06
07	15.00 (0.591)	18.20(0.717)	LH-XH250-07
08	17.50 (0.689)	20.70(0.815)	LH-XH250-08
09	20.00 (0.787)	23.20(0.913)	LH-XH250-09
10	22.50 (0.886)	25.70(1.012)	LH-XH250-10
11	25.00 (0.984)	28.20(1.110)	LH-XH250-11
12	27.50 (1.802)	30.70(1.209)	LH-XH250-12
13	30.00 (1.181)	33.20(1.307)	LH-XH250-13
14	32.50 (1.280)	35.70(1.406)	LH-XH250-14
15	35.00 (1.378)	38.20(1.504)	LH-XH250-15
16	37.50 (1.476)	40.70(1.602)	LH-XH250-16
20	47.50 (1.870)	50.70(1.996)	LH-XH250-20

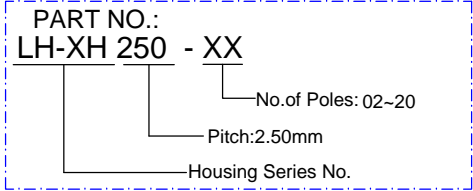

		公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		單位/Unit mm	品名(Title) : 2.5mm Wire-to-Board Housing		錄亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL: (02) 8228-6487 FAX: (02) 8228-6486
		X.XX ±0.2 X.X ±0.3		比例/Scale Free	料號/Part No : LH-XH250-XX		
A0	NEW DRAWING	2018.08.16		Size A4	圖號/Drawing No : 2500J-XX	核對/APPD. Joe	製圖/DR. Mandy
REV	概述/REVISION	日期/DATE				報數/Sheet 1 of 1	REV. A0