


SPECIFICATIONS

Current rating : 3A AC,DC
 Voltage rating : 250V AC,DC
 Temperature range : -25°C to +85 °C
 Contact resistance : 10mΩ Max.
 Insulation resistance : 1000MΩ Min.
 Withstanding voltage : 800V AC/minute
 Material : Nylon 66, UL94V-0

Ordering Information & Dimensions

Poles	Dimension (mm)		Part No.
	A	B	
02	2.50	7.00	LH-EH250-02
03	5.00	9.50	LH-EH250-03
04	7.50	12.00	LH-EH250-04
05	10.00	14.50	LH-EH250-05
06	12.50	17.00	LH-EH250-06
07	15.00	19.50	LH-EH250-07
08	17.50	22.00	LH-EH250-08
09	20.00	24.50	LH-EH250-09
10	22.50	27.00	LH-EH250-10
11	25.00	29.50	LH-EH250-11
12	27.50	32.00	LH-EH250-12

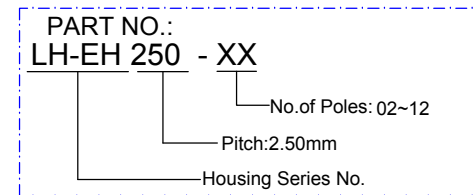

			公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	單位/Unit mm	品名(Title) : 2.5mm Wire-to-Board Housing		銖亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL: (02) 8228-6487 FAX: (02) 8228-6486
			X.XX ±0.2 X.X ±0.3	比例/Scale Free	料號/Part No : LH-EH250-XX		
A0	NEW DRAWING	2018.08.16		Size A4	核對/APPD. Joe		審核/CHKD. Joe
REV	概述/REVISION	日期/DATE			製圖/DR. Mandy		報數/Sheet 1 of 1