
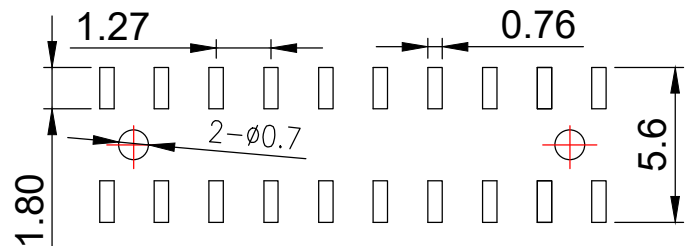
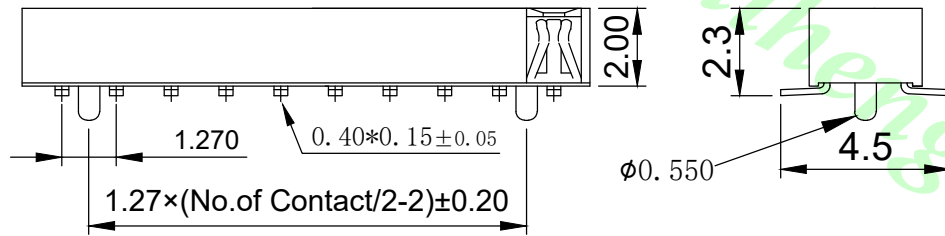


RoHS

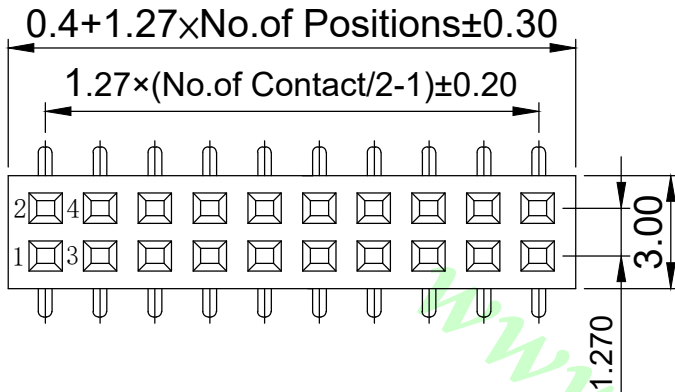

P. C. B Layout

### Specifications

Current Rating : 1 Amp  
 Insulator Resistance : 1000 Megohms Min.  
 Contact Resistance : 20 m ohms max.  
 Dielectric Withstanding : AC 500 V  
 Operating Temperature : -40°C ~ +105°C  
 Soldering Temperature : 260°C for 3~5sec Max.  
 Contact Material : Phosphor Bronze.  
 Standard : Gold Flash all over  
 Insulator Material : Polyester, UL 94V-0  
 Standard : Nylon 6T (BLACK)

### ORDER INFORMATION

LPCB 127 D T G N - 4.5 - 2xXX - P

Pitch: 1.27mm  
 Insulation  
 Height: 2.0mm  
 Width: 3.0mm  
 TYPE T: SMT  
 Contactn Plating  
 T : Tin  
 G : Gold Flash  
 G2 : Gold 2u"

SMT: 4.5mm  
 Material  
 N: NYLON 6T  
 C: LCP

No. Of Contact  
 Dual Row: 2x02~2x40  
 P: Pegs

公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			單位/Unit mm	品名(Title): 1.27*1.27mm Female Header H:2.0 W:3.0 SMT Dual Row, With Pegs	銖亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL: (02) 8228-6487 FAX: (02) 8228-6486
X. ±0.5 X° ±3° .X ±0.3 .X° ±2° .XX ±0.2 .XX° ±1° .XXX ±0.1 .XXX° ±0.5°			比例/Scale Free	料號/Part No: LPCB127DTG N-4.5-2xXX-P	
A0	NEW DRAWING	2019.09.02	Size A4	圖號/Drawing No: MF127HS1GN-2XX-PT	核對/APPD. 740
REV	概述/REVISION	日期/DATE		製圖/DR. Mandy	報數/Sheet 1 of 1