

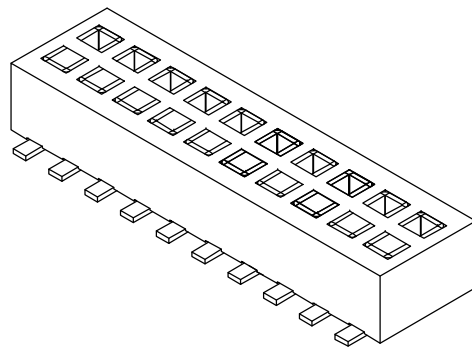
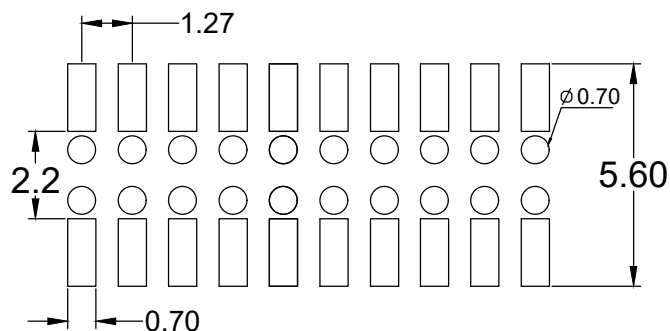



RoHS

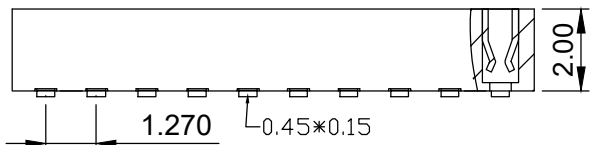

Specifications

Current Rating : 1 Amp
 Insulator Resistance : 1000 Megohms Min.
 Contact Resistance : 20 m ohms max.
 Dielectric Withstanding : AC 500 V
 Operating Temperature : -40°C ~ +105°C
 Soldering Temperature : 260°C for 3~5sec Max.
 Contact Material : Phosphor Bronze.
 Standard : Gold Flash all over
 Insulator Material : Polyester, UL 94V-0
 Standard : Nylon 6T/LCP (BLACK)

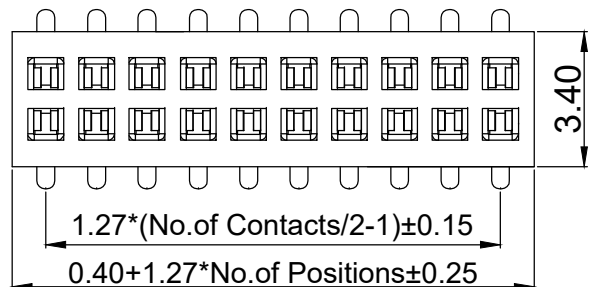

P. C. B Layout

ORDER INFORMATION

LPCB 127 G TD G X - 4.5 - 2xXX

Pitch: 1.27mm

Insulation

Height: 2.0mm

Width: 3.4mm

SMT TYPE

TD: SMT / 反插式

Contactn Plating

T : Tin

G : Gold Flash

G2 : Gold 2u"

SMT: 4.5mm

Material

N: NYLON 6T

C: LCP

No. Of Contact

Dual Row: 2x02~2x40

			公差/UNTLESS OTHERWISE SPECIFIED TOLERANCES ARE		單位/Unit mm	品名(Title):	
			X. ±0.5 X° ±3°		比例/Scale	1.27*1.27mm Female Header H:2.0 W:3.4	
			.X ±0.3 .X° ±2°		Free	SMT Dual Row (反向端子/反插式)	
			.XX ±0.2 .XX° ±1°		Size	料號/Part No :	
			.XXX ±0.1 .XXX° ±0.5°		A4	LPCB127GTDG X-4.5-2×XX	
A0	NEW DRAWING	2019.09.02	日期/DATE		圖號/Drawing No :		MF127LS1GN-2XX-T
REV	概述/REVISION		日期/DATE		核對/APPD. 740		製圖/DR. Mandy



鍊亨電子有限公司
 LAI HENG TECHNOLOGY LTD.
 TEL: (02) 8228-6487 FAX: (02) 8228-6486

報數/Sheet 1 of 1
 製圖/DR. Mandy
 核對/APPD. 740
 製圖/DR. Mandy
 報數/Sheet 1 of 1
 REV. A0