

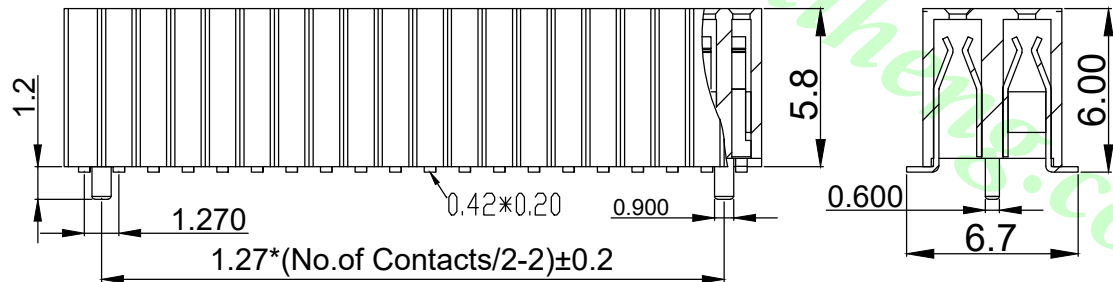


RoHS

Specifications

Current Rating : 1 Amp
 Insulator Resistance : 1000 Megohms Min.
 Contact Resistance : 20 m ohms max.
 Dielectric Withstanding : AC 500 V
 Operating Temperature : -40°C ~ +105°C
 Soldering Temperature : 260°C for 3~5sec Max.
 Contact Material : Phosphor Bronze.
 Standard : Gold Flash all over
 Insulator Material : Polyester, UL 94V-0
 Standard : Nylon 6T (BLACK)

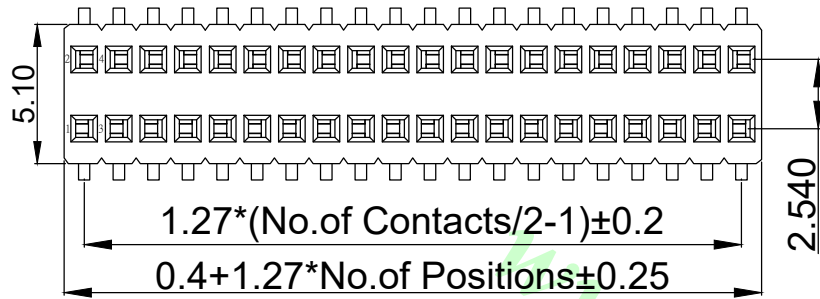


ORDER INFORMATION


LPCB 127 F T G N - 6.7 - 2xXX - P

Pitch: 1.27mm
 Insulation
 Height: 5.8mm
 Width: 5.1mm
 TYPE T: SMT
 Contact Plating
 T : Tin
 G : Gold Flash
 G2 : Gold 2u"

SMT: 6.7mm
 Material
 N: NYLON 6T
 C: LCP
 No. Of Contact
 Dual Row: 2x02~2x40
 P: Pegs

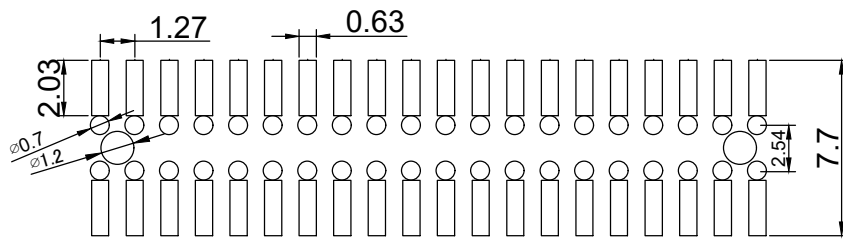

P.C.B Layout

		公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		單位/Unit	品名(Title):	 鍊亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL: (02) 8228-6487 FAX: (02) 8228-6486	
		SPECIFIED TOLERANCES ARE		mm	1.27*1.27mm Female Header H:5.8 W:5.1		
A0	NEW DRAWING	2019.09.02	X. ±0.5 .X ±0.3 .XX ±0.2 .XXX ±0.1	比例/Scale Free	料號/Part No:	圖號/Drawing No:	核對/APPD. 740
REV	概述/REVISION	日期/DATE	X° ±3° .X° ±2° .XX° ±1° .XXX° ±0.5°	Size A4	LPCB127FTG N-6.7-2×XX-P	MF127DS1GX-2XX-PT	審核/CHKD. Joe
						製圖/DR. Mandy	
						版數/Sheet 1 of 1	
						REV. A0	