
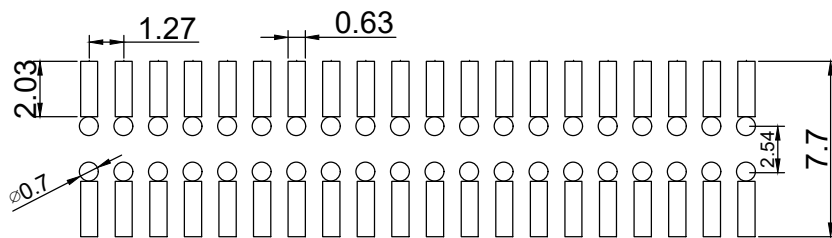

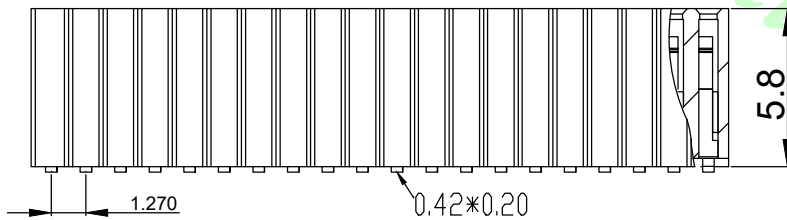


RoHS

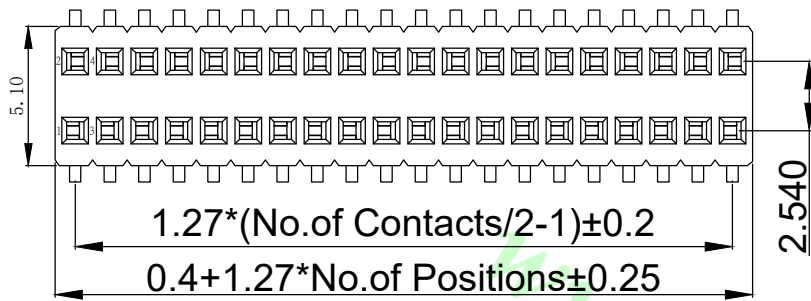

P.C.B Layout

Specifications

- Current Rating : 1 Amp
- Insulator Resistance : 1000 Megohms Min.
- Contact Resistance : 20 m ohms max.
- Dielectric Withstanding : AC 500 V
- Operating Temperature : -40°C ~ +105°C
- Soldering Temperature : 260°C for 3~5sec Max.
- Contact Material : Phosphor Bronze.
- Standard : Gold Flash all over
- Insulator Material : Polyester, UL 94V-0
- Standard : Nylon 6T(BLACK)

ORDER INFORMATION

- LPCB 127 F T G N - 6.7 - 2xXX
- Pitch: 1.27mm
 - Insulation
 - Height: 5.8mm
 - Width: 5.1mm
 - TYPE T: SMT
 - Contact Plating
 - T : Tin
 - G : Gold Flash
 - G2 : Gold 2u"
 - SMT: 6.7mm
 - No. Of Contact
 - Dual Row: 2x02~2x40
 - Material
 - N: NYLON 6T
 - C: LCP

			公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		單位/Unit mm	品名(Title):	
			X. ±0.5 X° ±3°		Free	1.27*1.27mm Female Header H:5.8 W:5.1	
			.X ±0.3 .X° ±2°		比例/Scale	SMT Type Dual Row	
A0	NEW DRAWING	2019.09.02	.XX ±0.2 .XX° ±1°		Size A4	料號/Part No:	
REV	概述/REVISION	日期/DATE	.XXX ±0.1 .XXX° ±0.5°		LPCB127FTG N-6.7-2×XX		圖號/Drawing No:
					MF127DSIGX-2XX-T		核對/APPD. 740
							審核/CHKD. Joe
							製圖/DR. Mandy
							版數/Sheet 1 of 1
							REV. A0


鍊亨電子有限公司
 LAI HENG TECHNOLOGY LTD.
 TEL: (02) 8228-6487 FAX: (02) 8228-6486