
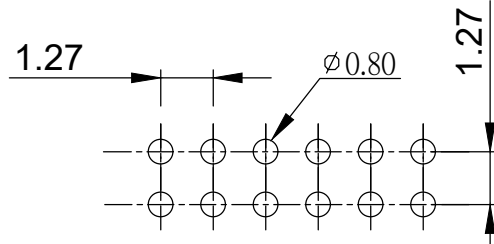
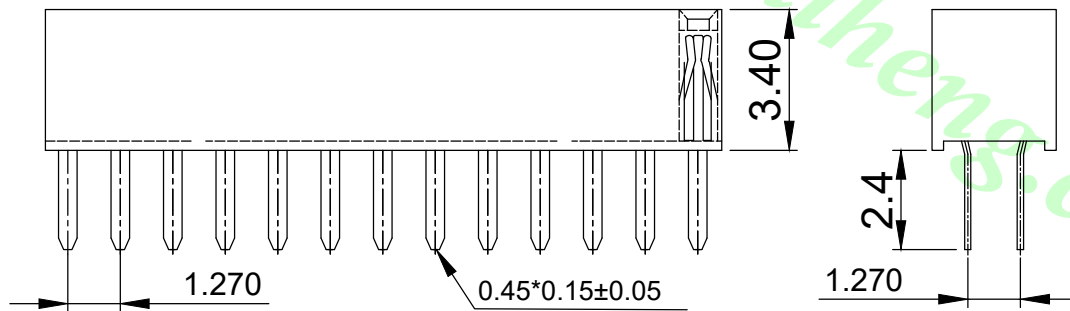


RoHS

# Specifications

Current Rating : 1 Amp  
 Insulator Resistance : 1000 Megohms Min.  
 Contact Resistance : 20 m ohms max.  
 Dielectric Withstanding: AC 500 V  
 Operating Temperature : -40°C ~ +105°C  
 Soldering Temperature : 260°C for 3~5sec Max.  
 Contact Material : Phosphor Bronze  
 Standard : Gold Flash all over  
 Insulator Material : Polyester, UL 94V-0  
 Standard : Nylon-6T (Black)

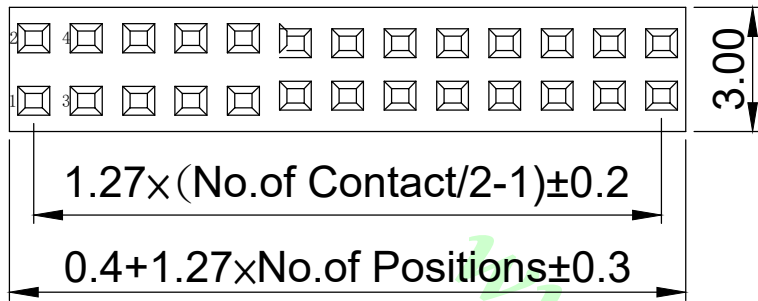

P.C.B Layout

## ORDER INFORMATION

LPCB 127 A S G N 2.4 - 2xXX

Pitch: 1.27mm

Insulation  
 Height: 3.40mm  
 Width: 3.00mm

TYPE S: 180°

Contactn Plating  
 T : Tin  
 G : Gold Flash

DIP: 2.4mm

Material  
 N: NYLON 6T  
 C: LCP

No. Of Contact  
 Dual Row: 2x02~2x40

		公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		單位/Unit	品名(Title):
		mm		mm	1.27*1.27mm Female Header H:3.4 W:3.0 180° Dual Row
		X. ±0.5 X° ±3°		比例/Scale	
		.X ±0.3 .X° ±2°		Free	
		.XX ±0.2 .XX° ±1°		Size	料號/Part No:
		.XXX ±0.1 .XXX° ±0.5°		A4	LPCB127ASG X 2.4-2xXX
A0	NEW DRAWING	2019.09.02			圖號/Drawing No:
REV	概述/REVISION	日期/DATE			MF127GV1GX-2XX-T



鍊亨電子有限公司  
 LAI HENG TECHNOLOGY LTD.  
 TEL: (02) 8228-6487 FAX: (02) 8228-6486

核對/APPD.	審核/CHKD.	製圖/DR.	張數/Sheet	REV.
Zho	Joe	Mandy	1 of 1	A0