
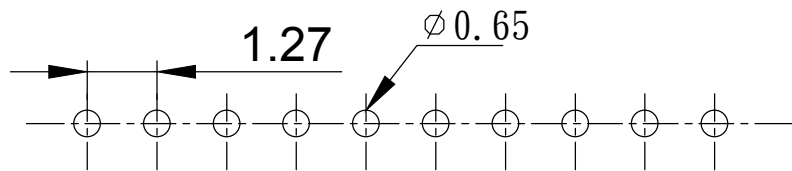
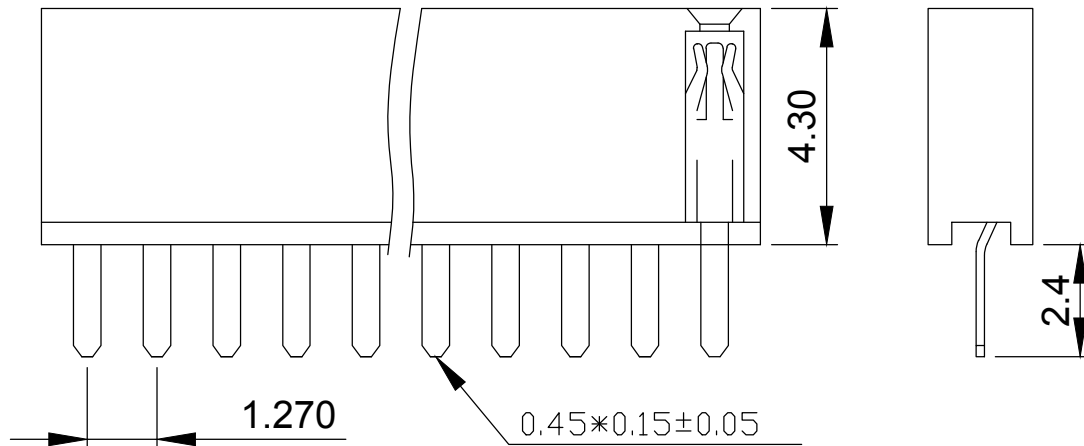


RoHS

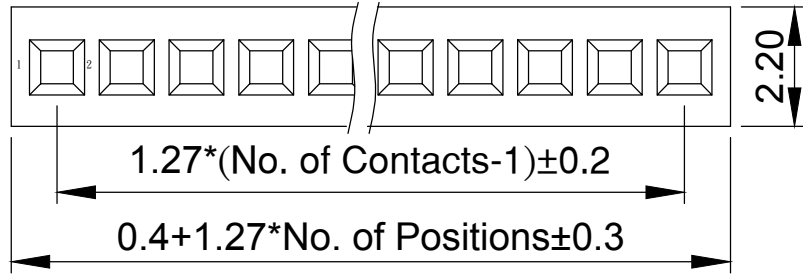

P.C.B Layout

Specifications

Current Rating :1 Amp
 Insulator Resistance :1000 Megohms Min.
 Contact Resistance :20 m ohms max.
 Dielectric Withstanding:AC 500 V
 Operating Temperature :-40°C ~ +105°C
 Soldering Temperature :260°C for 3~5sec Max.
 Contact Material :Phosphor Bronze
 Standard :Gold Flash all over
 Insulator Material :Polyester, UL 94V-0
 Standard :Nylon-6T/LCP (Black)

ORDER INFORMATION

LPCB 127 B S G X 2.4 - 1xXX

Pitch:1.27mm

Insulation
 Height: 4.30mm
 Width: 2.20mm

TYPE S:180°
 Contactn Plating
 T : Tin
 G : Gold Flash

DIP:2.4mm

Material
 N: NYLON 6T
 C: LCP

No.Of Contact
 Single Row: 1x02~1x40

		公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		單位/Unit mm	品名(Title):
				比例/Scale Free	1.27*1.27mm Female Header H:4.3 W:2.2 180° Single Row
A0	NEW DRAWING	2019.04.01	X. ±0.5 X° ±3° .X ±0.3 .X° ±2° .XX ±0.2 .XX° ±1° .XXX±0.1 .XXX°±0.5°	Size A4	料號/Part No:
REV	概述/REVISION	日期/DATE			LPCB127BSG X 2.4-1xXX

圖號/Drawing No:		製圖/DR:		報數/Sheet	
MF127FVIGX-1XX-X		Mandy		1 of 1	

鍊亨電子有限公司
 LAI HENG TECHNOLOGY LTD.
 TEL:(02) 8228-6487 FAX:(02) 8228-6486

核對/APPD. Joe 審核/CHKD. Joe 製圖/DR. Mandy