
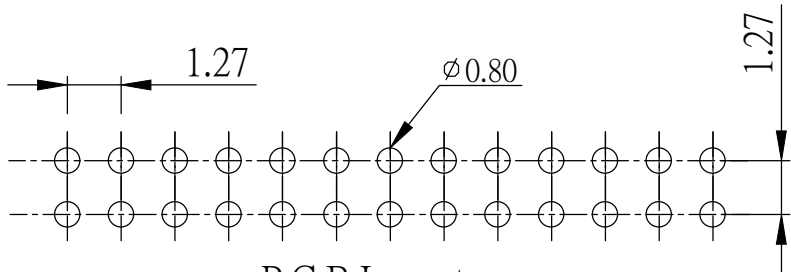
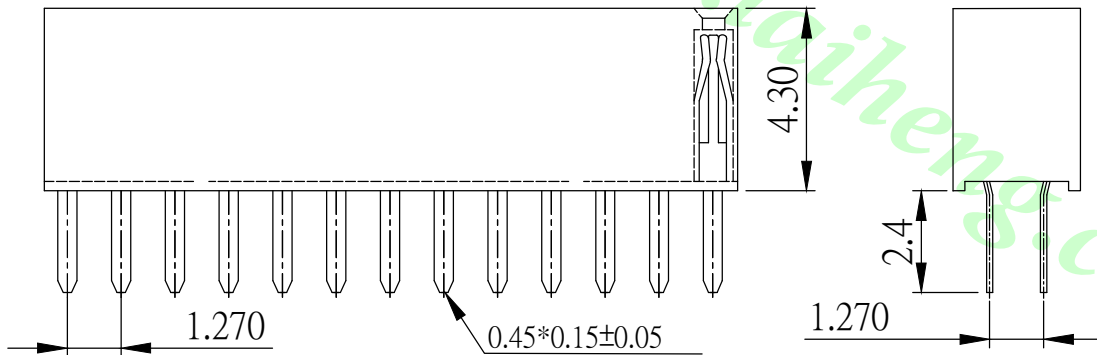


RoHS

### Specifications

Current Rating : 1 Amp  
 Insulator Resistance : 1000 Megohms Min.  
 Contact Resistance : 20 m ohms max.  
 Dielectric Withstanding: AC 500 V  
 Operating Temperature : -40°C ~ +105°C  
 Soldering Temperature : 260°C for 3~5sec Max.  
 Contact Material : Phosphor Bronze  
 Standard : Gold Flash all over  
 Insulator Material : Polyester, UL 94V-0  
 Standard : Nylon-6T/LCP (Black)

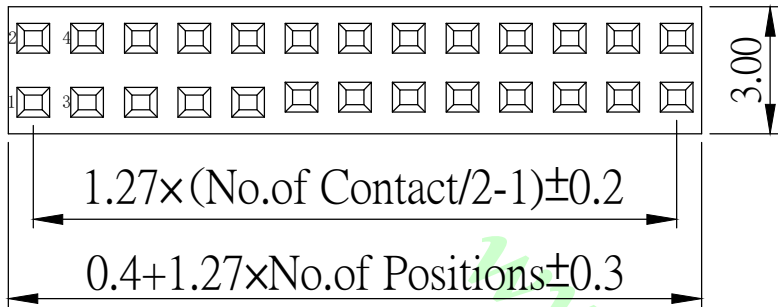

P.C.B Layout

### ORDER INFORMATION

LPCB 127 B S G X 2.4 - 2xXX

Pitch: 1.27mm

Insulation  
 Height: 4.3mm  
 Width: 3.0mm


TYPE S: 180°

Contact Plating  
 T : Tin  
 G : Gold Flash

DIP: 2.4mm

Material  
 N: NYLON 6T  
 C: LCP

No. Of Contact  
 Dual Row: 2x02~2x40

			公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		單位/Unit mm	品名(Title):		 <b>鍊亨電子有限公司</b> LAI HENG TECHNOLOGY LTD. TEL: (02) 8228-6487 FAX: (02) 8228-6486	
			X. ±0.5 X° ±3° .X ±0.3 .X° ±2° .XX ±0.2 .XX° ±1° .XXX ±0.1 .XXX° ±0.5°		比例/Scale Free	1.27*1.27mm Female Header H:4.3 W:3.0 180° Dual Row			
A0	NEW DRAWING	2019.04.01			Size A4	料號/Part No:		圖號/Drawing No:	
REV	概述/REVISION	日期/DATE				<b>LPCB127BSG X 2.4-2xXX</b>		MF127FV1GX-2XX-X	
						核對/APPD. Joe		製圖/DR. Mandy	
						報數/Sheet 1 of 1		REV. A0	