


RoHS

Specifications

Current Rating : 1 Amp
 Insulator Resistance : 1000 Megohms Min.
 Contact Resistance : 20 m ohms max.
 Dielectric Withstanding : AC 500 V
 Operating Temperature : -40°C ~ +105°C
 Soldering Temperature : 260°C for 3~5sec Max.
 Contact Material : Phosphor Bronze
 Standard : Gold Flash all over
 Insulator Material : Polyester, UL 94V-0
 Standard : Nylon-6T (Black)

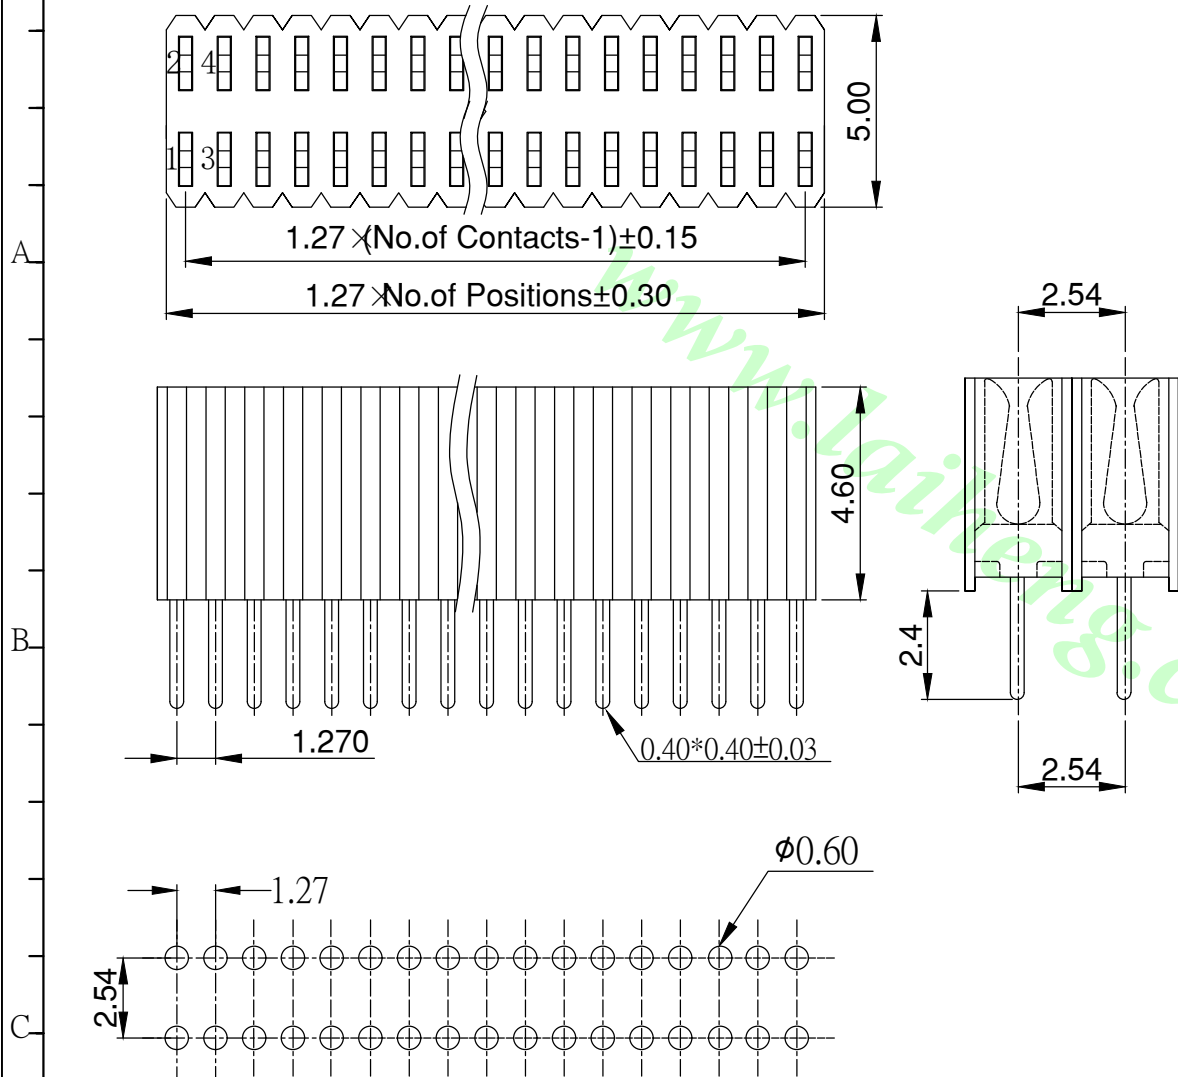


ORDER INFORMATION

LPCB 127 C S G N 2.4 - 2xXX

Pitch: 1.27mm
 Insulation
 Height: 4.6mm
 Width: 5.0mm
 TYPE S: 180°
 Contact Plating
 T : Tin
 G : Gold Flash
 G2 : Gold 2u"
 ...

DIP: 2.4mm
 No. Of Contact
 Dual Row: 2x02~2x40
 Material
 N: NYLON 6T
 C: LCP

| | | | | | |
|---------------------------------------------------------------------------------|-------------|------------|---------------|-----------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE | | | 單位/Unit mm | 品名(Title) : |  鍊亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL:(02) 8228-6487 FAX:(02) 8228-6486 |
| X. ±0.5 X° ±3° .X ±0.3 .X° ±2° .XX ±0.2 .XX° ±1° .XXX ±0.1 .XXX° ±0.5° | | | 比例/Scale Free | 1.27*1.27mm Female Header H:4.6 W:5.0 180° Dual Row | |
| A0 | NEW DRAWING | 2019.09.02 | Size A4 | 料號/Part No : | 圖號/Drawing No : |
| REV | 概述/REVISION | 日期/DATE | | LPCB127CSG N 2.4-2xXX | MF127EV1XX-2XX-X |
| | | | | 核對/APPD. 740 | 審核/CHKD. Joe |
| | | | | 製圖/DR. Mandy | 張數/Sheet 1 of 1 |
| | | | | REV. A0 | |