


RoHS

Specifications

Current Rating : 1 Amp
 Insulator Resistance : 1000 Megohms Min.
 Contact Resistance : 20 m ohms max.
 Dielectric Withstanding : AC 500 V
 Operating Temperature : -40°C ~ +105°C
 Contact Material : Phosphor Bronze
 Standard : Gold Flash all over
 Insulator Material : Polyester, UL 94V-0
 Standard : NYLON 6T (BLACK)

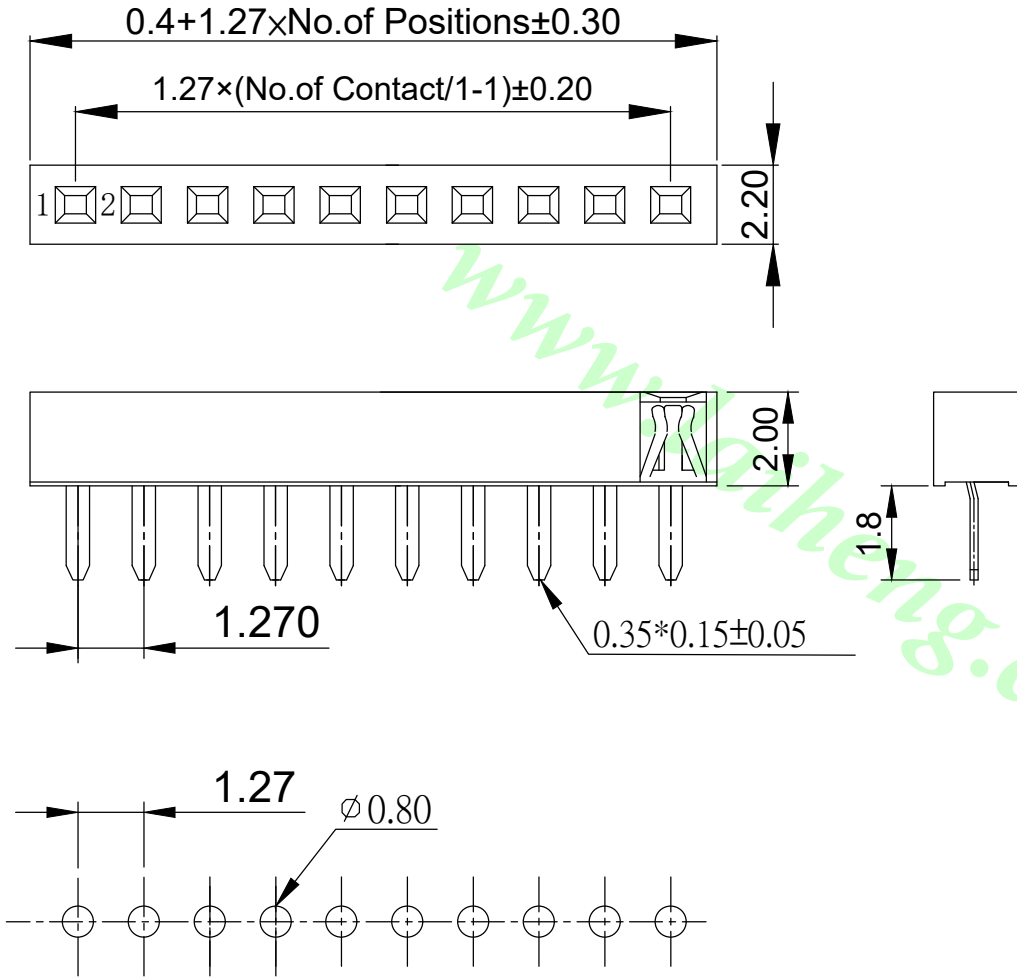

P. C. B Layout

ORDER INFORMATION

LPCB 127 D S G N 1.8 - 1xXX

Pitch: 1.27mm

Insulation
 Height: 2.0mm
 Width: 2.2mm


TYPE S: 180°

Contactn Plating
 T : Tin
 G : Gold Flash

DIP: 1.8mm

Material
 N: NYLON 6T
 C: LCP

No. Of Contact
 Single Row: 1x02~1x40

		公意/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		單位/Unit mm	品名(Title) :	 鍊亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL: (02) 8228-6487 FAX: (02) 8228-6486	
		X. ±0.5 X° ±3° .X ±0.3 .X° ±2° .XX ±0.2 .XX° ±1° .XXX ±0.1 .XXX° ±0.5°		比例/Scale Free	1.27*1.27mm Female Header H:2.0 W:2.2 180° Single Row		
A0	NEW DRAWING	2019.09.02		Size A4	料號/Part No :	圖號/Drawing No :	核對/APPD. 746
REV	概述/REVISION	日期/DATE			LPCB127DSG N 1.8-1xXX	MF127HV1GX-1XX-T	製圖/DR. Mandy
							報數/Sheet 1 of 1
							REV. A0