
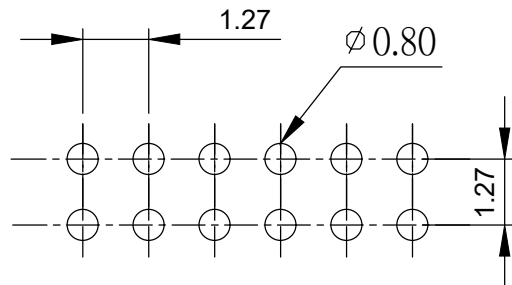
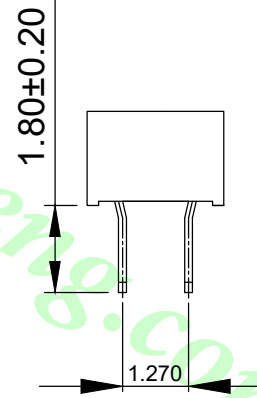
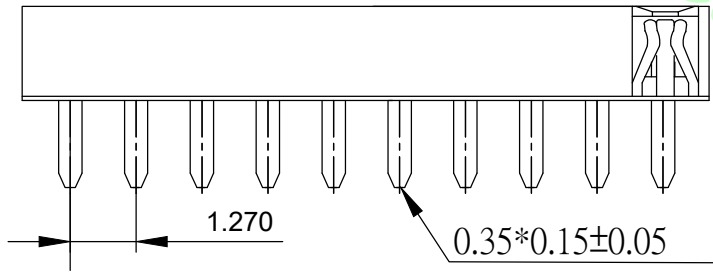


RoHS

### Specifications

Current Rating : 1 Amp  
 Insulator Resistance : 1000 Megohms Min.  
 Contact Resistance : 20 m ohms max.  
 Dielectric Withstanding : AC 500 V  
 Operating Temperature : -40°C ~ +105°C  
 Contact Material : Phosphor Bronze  
 Standard : Gold Flash all over  
 Insulator Material : Polyester, UL 94V-0  
 Standard : NYLON 6T (BLACK)

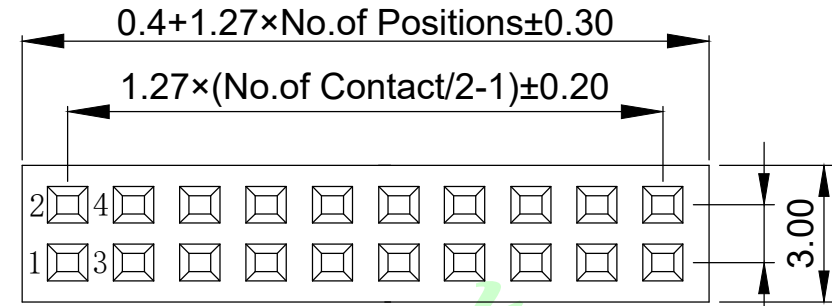

P. C. B Layout

### ORDER INFORMATION

LPCB 127 D S G X 1.8 - 2xXX

Pitch: 1.27mm

Insulation  
 Height: 2.0mm  
 Width: 3.0mm

TYPE S: 180°

Contactn Plating  
 T : Tin  
 G : Gold Flash

DIP: 1.8mm

Material  
 N: NYLON 6T  
 C: LCP

No.Of Contact  
 Dual Row: 2x02~2x40

			公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		單位/Unit	品名(Title):	
			X. ±0.5 X° ±3°		mm	1.27*1.27mm Female Header H:2.0 W:3.0 180° Dual Row	
			.X ±0.3 .X° ±2°		Free	料號/Part No:	
			.XX ±0.2 .XX° ±1°		Size	LPCB127DSG X 1.8-2xXX	
			.XXX ±0.1 .XXX° ±0.5°		A4	圖號/Drawing No:	
A0	NEW DRAWING	2019.04.29			MF127HV1GX-2XX-AT		
REV	概述/REVISION	日期/DATE			核對/APPD. 746 審核/CHKD. Joe 製圖/DR. Mandy 報數/Sheet 1 of 1		

**鍊亨電子有限公司**  
 LAI HENG TECHNOLOGY LTD.  
 TEL: (02) 8228-6487 FAX: (02) 8228-6486