



SPECIFICATION

Current Rating: 1 A  
 Withstanding Voltage: 500V AC  
 Insulation Resistance: 1000 Megohms Min.  
 Operating Temperature: -55°C to +105°C

MATERIAL

Contact: Copper Alloy  
 Insulator: Polyester, UL94V-0  
 NYLON 6T  
 Plating: All Gold or Tin

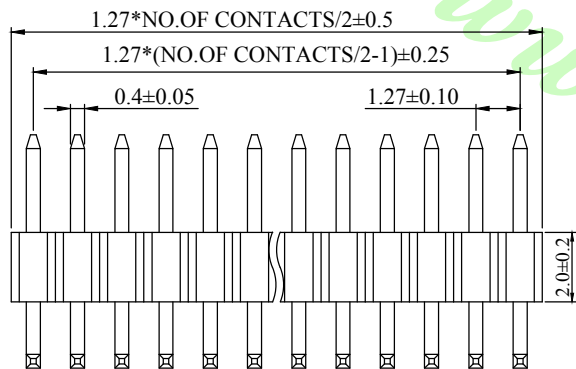

ORDER INFORMATION

LP/H 127 T X N a D c - b - 2xXX

Pitch: 1.27mm Type T: SMT Material N: NYLON 6T

No. Of Contact Dual Row: 2x02~2x50


Contact Plating

- T : Tin
- G : Gold Flash
- G3 : All Gold 3u"
- G5 : All Gold 5u"
- G10: All Gold 10u"
- G15: All Gold 15u"
- G20: All Gold 20u"
- G30: All Gold 30u"

SMT Expand Size: 5.0~6.0mm  
 b: Pin Chart Dimension See Pin Chart  
 Standard: \_\_\_\_\_

a: Pin Chart Dimension See Pin Chart  
 D: Insulation Height: 2.0mm, Width: 3.4mm  
 c: Pin Chart Dimension See Pin Chart

Standard: 3D1.2



Recommended P.C.Board Hold Layout

Pin Chart:

a : \_\_\_\_\_ mm

Standard: 3.0 mm

b : \_\_\_\_\_ mm

Standard: mm

c : \_\_\_\_\_ mm

Standard: 1.2 mm

		公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		單位/Unit mm	品名/Title :		鍊亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL:(02) 8228-6487 FAX:(02) 8228-6486
				比例/Scale Free	1.27x1.27mm Pin Header H:2.0 W:3.4 Dual Row SMT Type		
A0	NEW DRAWING	2018.08.16		Size A4	料號/Part No : LP/H127TXNaDc-b-2xXX		核加/APPD. Joe
REV	概述/REVISION	日期/DATE			圖號/Drawing No : 127-GM-2xXX-ABC-3		審核/CHKD. Mandy
							製圖/DR. Mandy
							張數/Sheet 1 of 1
							REV. A0