
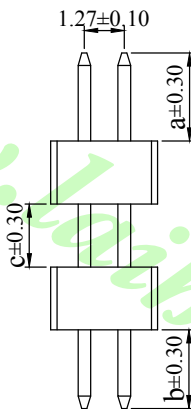


**SPECIFICATION**

Current Rating: 1 A  
 Withstanding Voltage: 500V AC  
 Insulation Resistance: 1000 Megohms Min.  
 Operating Temperature: -55°C to +105°C

**MATERIAL**

Contact: Copper Alloy  
 Insulator: NYLON 6T, UL94V-0  
 Plating: All Gold or Tin

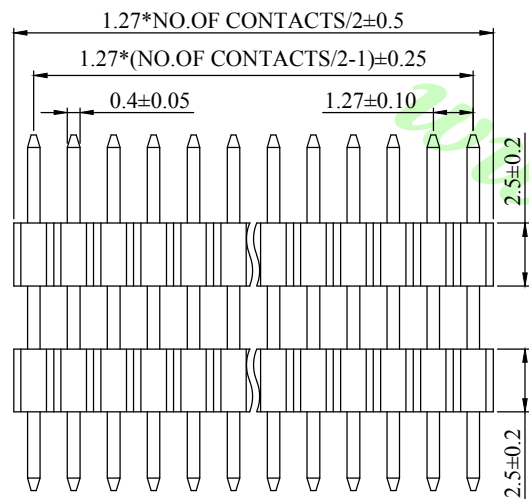

**ORDER INFORMATION**

LP/H 127 S X N a E c E b - 2xXX

Pitch: 1.27mm Type S: 180°

Material N: NYLON 6T

No. Of Contact Dual Row: 2x02~2x50

**Contact Plating**

- T : Tin
- G : Gold Flash
- G3 : All Gold 3u"
- G5 : All Gold 5u"
- G10 : All Gold 10u"
- G15 : All Gold 15u"
- G20 : All Gold 20u"
- G30 : All Gold 30u"

a: Pin Chart Dimension See Pin Chart  
 A: Insulation Height: 2.5mm, Width: 3.4mm  
 c: Pin Chart Dimension See Pin Chart  
 A: Insulation Height: 1.0mm, Width: 3.4mm  
 b: Pin Chart Dimension See Pin Chart

Standard: 3A1A2.3

Pin Chart:

a : \_\_\_\_\_ mm


Standard: 3.0mm

b : \_\_\_\_\_ mm

Standard: 2.3mm

c : \_\_\_\_\_ mm

Standard: 1.0mm



Recommended P.C.Board Hold Layout

公認/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			單位/Unit mm	品名/Title :	1.27mm Pin Header H:2.5 W:3.4 Dual Row Dual Base Straight Dip Type	<b>鍊亨電子有限公司</b> LAI HENG TECHNOLOGY LTD. TEL:(02) 8228-6487 FAX:(02) 8228-6486
A0	NEW DRAWING	2018.08.16	比例/Scale Free	料號/Part No :		
REV	概述/REVISION	日期/DATE	Size A4	<b>LP/H127SXNaEcEb-2×XX</b>		127-GSD-2×XX-ABC-4 核加/APPD. 740 審核/CHKD. Joe 製圖/DR. Mandy 張數/Sheet 1 of 1