


SPECIFICATION

Current Rating: 1 A
 Withstanding Voltage: 500V AC
 Insulation Resistance: 1000 Megohms Min.
 Operating Temperature: -55°C to +105°C (NYLON 6T)

MATERIAL

Contact: Copper Alloy
 Insulator: Polyester, UL94V-0
 NYLON 6T
 Plating: All Gold or Tin

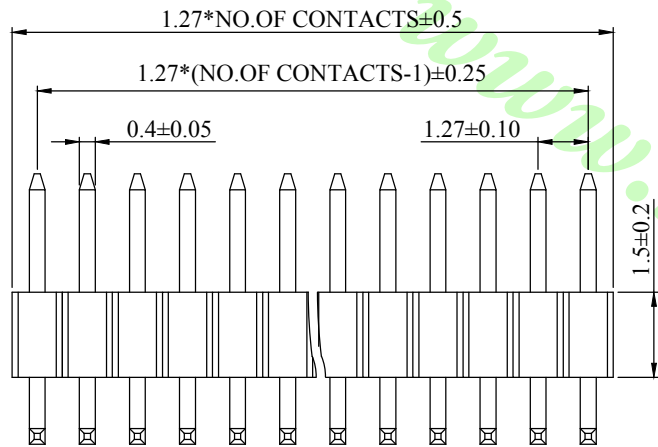

ORDER INFORMATION

LP/H 127 R X N a B c / b - 1xXX

Pitch: 1.27mm Type R: 90°

Material N: NYLON 6T


No. Of Contact Single Row: 1x02~1x50

Contact Plating

- T : Tin
- G : Gold Flash
- G3 : All Gold 3u"
- G5 : All Gold 5u"
- G10: All Gold 10u"
- G15: All Gold 15u"
- G20: All Gold 20u"
- G30: All Gold 30u"

a: Pin Chart Dimension See Pin Chart
 A: Insulation Height: 1.5mm, Width: 2.1mm
 c: Pin Chart Dimension See Pin Chart
 b: Pin Chart Dimension See Pin Chart

Standard: 3A1/2.3



Pin Chart:

a : _____ mm


Standard: 3.0mm

b : _____ mm

Standard: 2.3mm

c : _____ mm

Standard: 1.0mm

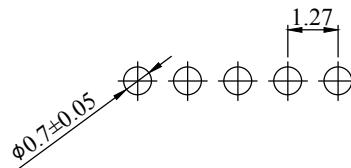

Recommended P.C.Board Hold Layout

			公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
A0	NEW DRAWING	2018.08.16	
REV	概述/REVISION	日期/DATE	

單位/Unit mm	品名/Title :
比例/Scale	
Free Size	料號/Part No :
A4	

1.27mm Pin Header H:1.5 W:2.1
 Single Row Down Angle Dip Type

圖號/Drawing No : LP/H127RXNaBc/b-1×XX 127-GR1-1×XX-ABC-0-1



鍊亨電子有限公司
 LAI HENG TECHNOLOGY LTD.
 TEL:(02) 8228-6487 FAX:(02) 8228-6486

核加/APPD. 740	審核/CHKD. Joe	製圖/DR. Mandy	張數/Sheet 1 of 1	REV. A0
--------------	--------------	--------------	-----------------	---------