


SPECIFICATION

Current Rating: 1 A
 Withstanding Voltage: 500V AC
 Insulation Resistance: 1000 Megohms Min.
 Operating Temperature: -40°C to +85°C (PBT)
 -55°C to +105°C (NYLON 6T)

MATERIAL

Contact: Copper Alloy
 Insulator: Polyester, UL94V-0
 NYLON 6T or PBT
 Plating: All Gold or Tin

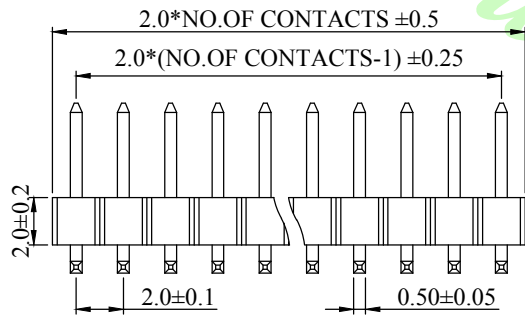

ORDER INFORMATION

LP/H 200 R X X a A c / b - 1xXX

Pitch Type
R:90°

Material
P: PBT
N: NYLON 6T

No.Of Contact
Single Row: 1x01~1x40

a: Pin Chart Dimension See Pin Chart
 A: Insulation Height:2.0mm, Width:2.0mm
 c: Pin Chart Dimension See Pin Chart
 b: Pin Chart Dimension See Pin Chart

Contactn Plating

- T : Tin
- G : Gold Flash
- G3 : All Gold 3u"
- G5 : All Gold 5u"
- G10: All Gold 10u"
- G15: All Gold 15u"
- G20: All Gold 20u"
- G30: All Gold 30u"

Standard: 4A1/2.8

Pin Chart:

a : _____ mm


Standard:4.0mm

b : _____ mm

Standard:2.8mm

c : _____ mm

Standard:1.0mm

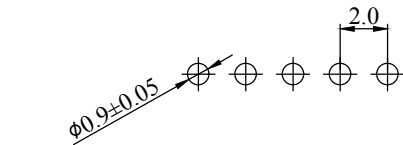

Recommended P.C.Board
Hold Layout

公認/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			單位/Unit mm	品名/Title :	鍊亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL:(02) 8228-6487 FAX:(02) 8228-6486
A0	NEW DRAWING	2018.08.16	比例/Scale Free	2.0mm Pin Header H:2.0 W:2.0 Single Row Down Angle Dip Type	
REV	概述/REVISION	日期/DATE	Size A4	料號/Part No : LP/H200RX XaAc/b-1×XX	
				圖號/Drawing No : 200-GR1-1×XX-ABC-X	
			核對/APPD. Ho	審核/CHKD. Joe	製圖/DR. Mandy
			張數/Sheet 1 of 1	REV. A0	