



**SPECIFICATION**

Current Rating: 1 A  
 Withstanding Voltage: 500V AC  
 Insulation Resistance: 1000 Megohms Min.  
 Operating Temperature: -55°C to +105°C (NYLON 6T)

**MATERIAL**

Contact: Copper Alloy  
 Insulator: Polyester, UL94V-0  
 NYLON 6T  
 Plating: All Gold or Tin

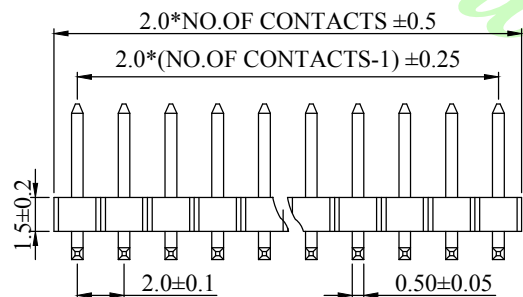

**ORDER INFORMATION**

LP/H 200 R X N a B c / b - 1xXX

Pitch: 2.0mm Type R: 90°

Material N: NYLON 6T

No. Of Contact Single Row: 1x01~1x40

a: Pin Chart Dimension See Pin Chart  
 B: Insulation Height: 1.5mm, Width: 2.0mm  
 c: Pin Chart Dimension See Pin Chart  
 b: Pin Chart Dimension See Pin Chart

Standard: 4B1/2.8

**Contact Plating**

- T : Tin
- G : Gold Flash
- G3 : All Gold 3u"
- G5 : All Gold 5u"
- G10: All Gold 10u"
- G15: All Gold 15u"
- G20: All Gold 20u"

**Pin Chart:**

a : \_\_\_\_\_ mm


Standard: 4.0mm

b : \_\_\_\_\_ mm

Standard: 2.8mm

c : \_\_\_\_\_ mm

Standard: 1.0mm



Recommended P.C.Board Hold Layout

公認/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			單位/Unit mm	品名/Title : 2.0mm Pin Header H:1.5 W:2.0 Single Row Down Angle Dip Type	
比例/Scale			Free	料號/Part No : LP/H200RXNaBc/b-1×XX	
A0	NEW DRAWING	2018.08.16	Size A4	圖號/Drawing No : 200-GR1-1×XX-ABC-N(H1.5)	核加/APPD. 740 審核/CHKD. Joe 製圖/DR. Mandy 張數/Sheet 1 of 1
REV	概述/REVISION	日期/DATE			1 of 1 REV. A0