



SPECIFICATION

Current Rating: 3 A
 Withstanding Voltage: 500V AC
 Insulation Resistance: 1000 Megohms Min.
 Operating Temperature: -40°C to +85°C (PBT)
 -55°C to +105°C (NYLON 6T)

MATERIAL

Contact: Coppery Alloy
 Insulator: Polyester, UL94V-0
 NYLON 6T or PBT
 Plating: All Gold or Tin

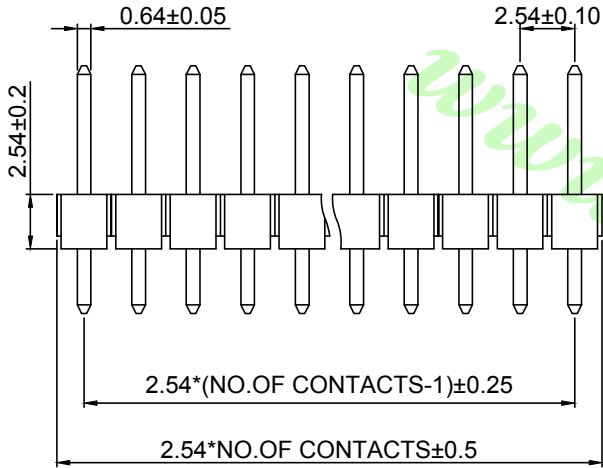

ORDER INFORMATION

LP/H 254 S X X a A b - 1xXX
 Pitch: 2.54mm Type S: 180° Material P: PBT N: NYLON 6T
 No. Of Contact Single Row: 1x01~1x40

a: Pin Chart Dimension See Pin Chart
 A: Insulation Height: 2.54mm, Width: 2.54mm
 b: Pin Chart Dimension See Pin Chart

Standard: 6A3

Pin Chart:

a : _____ mm

Standard: 6.0mm

b : _____ mm

Standard: 3.0mm

Contact Plating

- T : Tin
- G : Gold Flash
- G3 : All Gold 3u"
- G5 : All Gold 5u"
- G10 : All Gold 10u"
- G15 : All Gold 15u"
- G20 : All Gold 20u"
- G30 : All Gold 30u"



Recommended P.C.Board Hold Layout

		公意/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		單位/Unit mm	品名/Title : 2.54mm Pin Header H:2.54 W:2.54 Single Row Straight Dip Type		鍊亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL:(02) 8228-6487 FAX:(02) 8228-6486				
A0	NEW DRAWING	2018.07.04		比例/Scale Free	料號/Part No : LP/H254SXXaAb-1×XX		圖號/Drawing No : 254-GS-1×XX-A/B-X	核加/APPD. 740	審核/CHKD. Joe	製圖/DR. Mandy	張數/Sheet 1 of 1
REV	概述/REVISION	日期/DATE		Size A4							