

SPECIFICATION

Current Rating: 3 A
 Withstanding Voltage: 500V AC
 Insulation Resistance: 1000 Megohms Min.
 Operating Temperature: -55°C to +105°C

MATERIAL

Contact: Copper Alloy
 Insulator: Polyester, UL94V-0
 NYLON 6T
 Plating: All Gold or Tin

ORDER INFORMATION

LP/H 254 T X N a A c - b - 2xXX

Pitch: 2.54mm Type T: SMT Material N: NYLON 6T



No. Of Contact Dual Row: 2x02~2x40

Contact Plating
 T : Tin
 G : Gold Flash
 G3 : All Gold 3u"
 G5 : All Gold 5u"
 G10: All Gold 10u"
 G15: All Gold 15u"
 G20: All Gold 20u"
 G30: All Gold 30u"

SMT Expand Size: 7.0~9.0mm
 b: Pin Chart Dimension See Pin Chart
 Standard: 7.5

a: Pin Chart Dimension See Pin Chart
 A: Insulation Height: 2.54mm, Width: 5.08mm
 c: Pin Chart Dimension See Pin Chart

Standard: 6A0.64

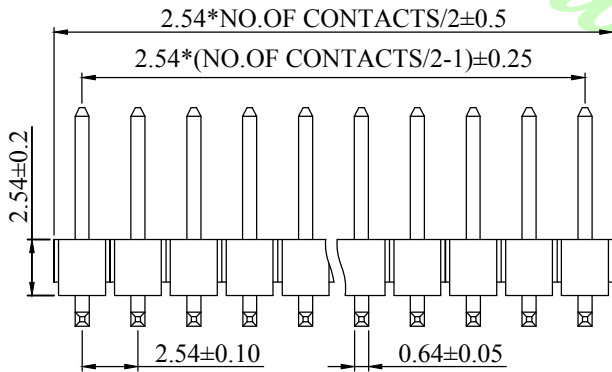

Pin Chart:


a : _____ mm

Standard: 6.0mm

Standard: 7.5mm

c : _____ mm

Standard: 0.64mm

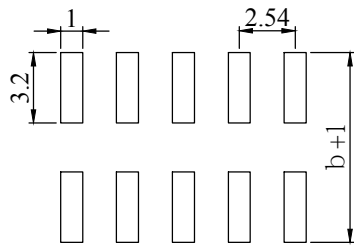

Recommended P.C.Board Hold Layout

公認/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			單位/Unit mm	品名/Title :	鍊亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL:(02) 8228-6487 FAX:(02) 8228-6486			
			比例/Scale Free	2.54mm Pin Header H:2.54 W:5.08 Dual Row SMT Type				
A0	NEW DRAWING	2018.08.16	Size A4	料號/Part No :	圖號/Drawing No :			
REV	概述/REVISION	日期/DATE		LP/H254TXNaAc-b-2×XX	254-GM-2×XX-ABC-N			
				核加/APPD. 740	審核/CHKD. Joe	製圖/DR. Mandy	張數/Sheet 1 of 1	REV. A0