





\* B TYPE

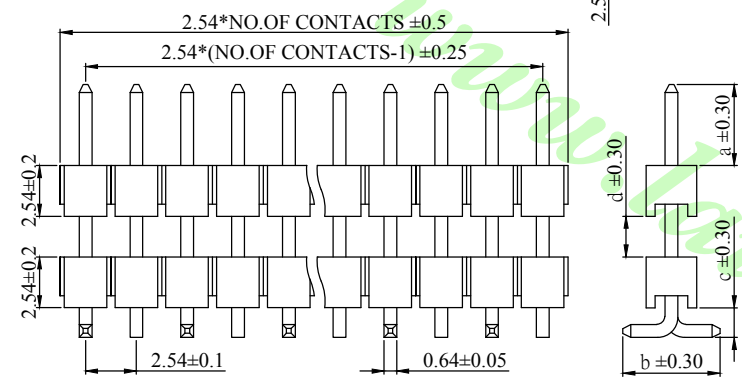


\* A TYPE



B TYPE



A TYPE

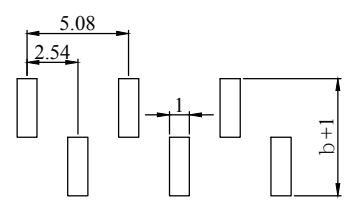

Recommended P.C.Board Hold Layout

SPECIFICATION

Current Rating: 3 A  
 Withstanding Voltage: 500V AC  
 Insulation Resistance: 1000 Megohms Min.  
 Operating Temperature: -55°C to +105°C

MATERIAL

Contact: Copper Alloy  
 Insulator: Polyester, UL94V-0  
 NYLON 6T  
 Plating: All Gold or Tin

ORDER INFORMATION

LP/H 254 T X N a A d A c - b - 1xXX XT

Pitch: 2.54mm Type T: SMT Material N: NYLON 6T

Contact Plating  
 T : Tin  
 G : Gold Flash  
 G3 : All Gold 3u"  
 G5 : All Gold 5u"  
 G10 : All Gold 10u"  
 G15 : All Gold 15u"  
 G20 : All Gold 20u"  
 G30 : All Gold 30u"

other  
 AT: A Type  
 BT: B Type

No.Of Contact  
 Single Row: 1x01~1x40

SMT Expand Size: 5.0~8.0mm

b: Pin Chart Dimension See Pin Chart  
 Standard: 5

a: Pin Chart Dimension See Pin Chart  
 A: Insulation Height: 2.54mm, Width: 2.54mm  
 c: Pin Chart Dimension See Pin Chart  
 Standard: 6A0A0.64

Pin Chart:  
**a** : \_\_\_\_\_ mm  
 Standard: 6.0mm  
**b** : \_\_\_\_\_ mm  
 Standard: 5.0mm  
**c** : \_\_\_\_\_ mm  
 Standard: 0.64mm  
**d** : \_\_\_\_\_ mm  
 Standard: 0.0mm

			公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	單位/Unit mm	品名/Title :
A0	NEW DRAWING	2018.08.16		比例/Scale Free	2.54mm Pin Header H:2.54 W:2.54 Single Row Dual Base SMT Type
REV	概述/REVISION	日期/DATE		料號/Part No :	圖號/Drawing No :
				LP/H254TXNaAdAc-b-1×XXXT	254-GMXD-1×XX-ABCD-N

**鍊亨電子有限公司**  
 LAI HENG TECHNOLOGY LTD.  
 TEL:(02) 8228-6487 FAX:(02) 8228-6486

核准/APPD. 740	審核/CHKD. Joe	製圖/DR. Mandy	張數/Sheet 1 of 1	REV. A0
--------------	--------------	--------------	-----------------	---------