







RoHS

MATERIALS

HOUSING: HI-TEMP PLASTIC (UL 94V-0)
 SHELL: COPPER ALLOY OR SPCC, NICKEL PLATING
 TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA, TIN PLATED ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1 AMP MAX
 DIELECTRIC WITHSTANDING: 100V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 50m OHMS MAX
 INSULATION RESISTANCE: 100M OHMS MIN AT DC 100V
 OPERATION TEMPERATURE: -25°C~+85°C

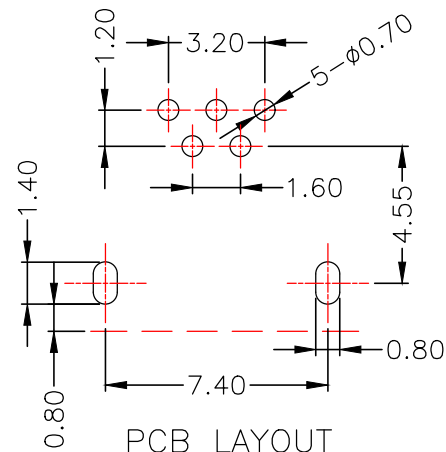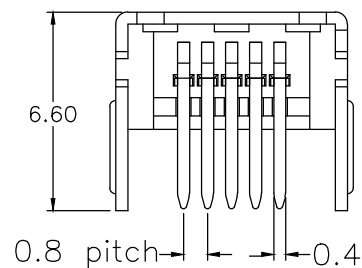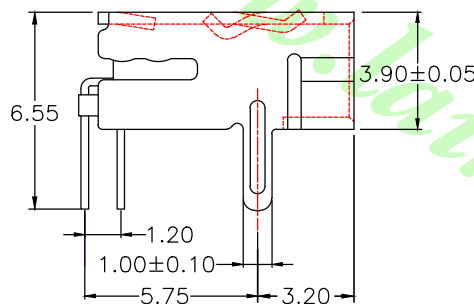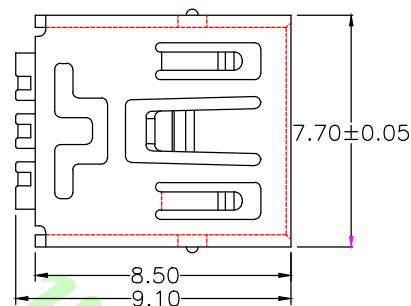


PART NUMBER

LMNUB-22MH 0 5 1 T 1 3 7 L *

SERIES ———— T
 NO. OF POS. ———— 0 5
 CONTACT PLATED OPTION ———— 1 T
 1: GOLD FLASH
 4: 15u" GOLD
 6: 30u" GOLD

TUBE ———— 1 3 7
 TIN PLATING ON SOLDER TAIL ———— *

SHELL MATERIAL:
 1: COPPER ALLOY
 2: SPCC

公認/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			單位/Unit mm	品名/Title :	 鍊亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL:(02) 8228-6487 FAX:(02) 8228-6486
A0	NEW DRAWING	2018.09.25	比例/Scale Free	MINI USB B TYPE, PCB MOUNT, RIGHT ANGLE, METAL SHIELD, FEMALE, FOOT H:2.7MM	
REV	概述/REVISION	日期/DATE	Size A4	料號/Part No : LMNUB-22MH051T137Lx	圖號/Drawing No : 22MH-008
				核加/APPD. 7/0	審核/CHKD. Joe
				製圖/DR. Mandy	張數/Sheet 1 of 1
				REV. A0	