


RoHS

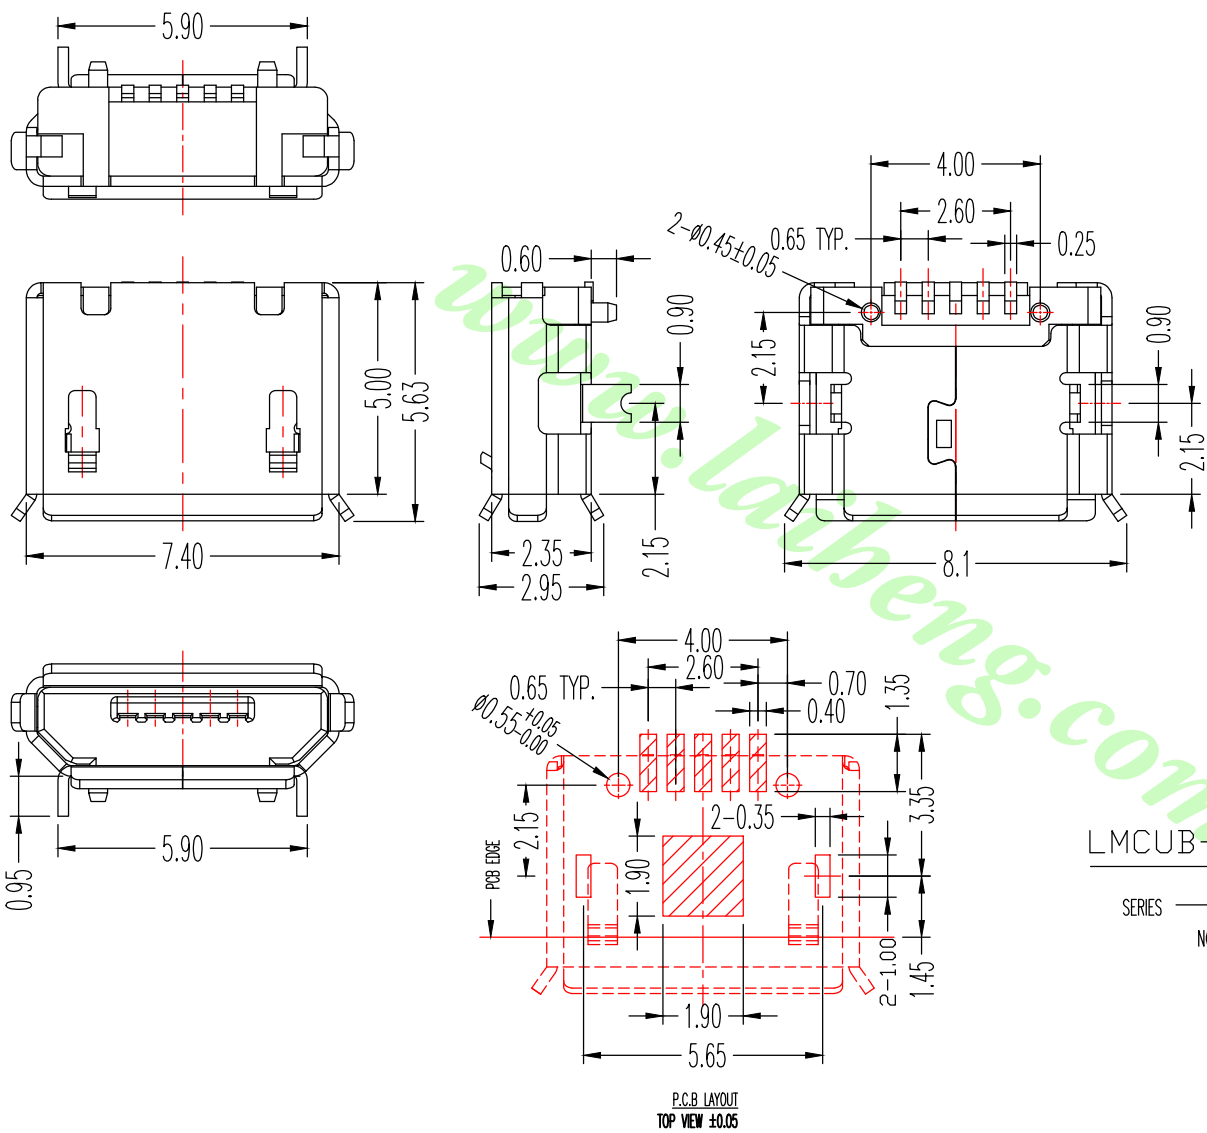


MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0)
 SHELL: COPPER ALLOY & STAINLESS STEEL,
 TIN PLATED & NICKEL PLATED
 TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
 TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1.8 AMP MAX (ONLY PIN 1, 5), OTHER 1 AMP MAX
 DIELECTRIC WITHSTANDING: 100V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 30m OHMS MAX
 INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -25°C~+105°C

PART NUMBER

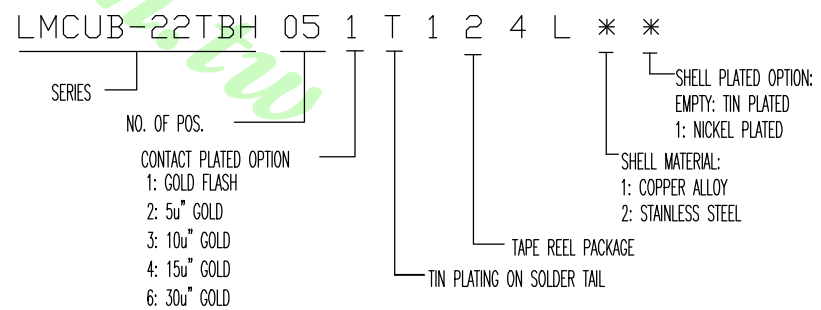

公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			單位/Unit mm	品名/Title : MICRO USB B TYPE, PCB MOUNT, SMT, METAL SHIELD , FEMALE , WITH POST	鍊亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL: (02) 8228-6487 FAX: (02) 8228-6486
.X ±0.30 .XX ±0.20 .XXX ±0.10 ANG. ±3°			比例/Scale Free Size A4	料號/Part No : LMCUB-22TBH051T124Lx x	
A0	NEW DRAWING	2018.09.25		圖號/Drawing No : 22TB-005	核加/APPD. 7/4 審核/CHKD. Joe 製圖/DR. Mandy 張數/Sheet 1 of 1 REV. A0
REV	概述/REVISION	日期/DATE			