


**MATERIAL:**


Wafer: Nylon46, UL94V-0.  
Pin: High Strength, Brass  
With Tin over Nickel plated

**SPECIFICATION:**

Current Rating: 1A AC, DC  
Voltage Rating: 125V AC,DC  
Operating Temp.: -40°C ~ +85°C  
Insulation Resistance: 100MΩ/ min.  
Dielectric Withstanding Voltage: 250V AC/ minute  
Contact Resistance: 20mΩ/ max.

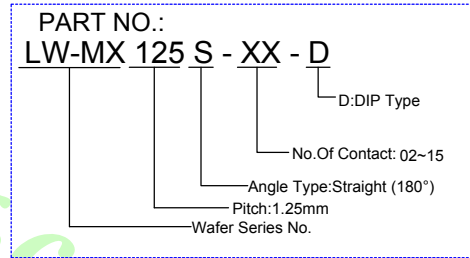

CKT.	Dimension mm		
	A	B	C
2	1.25	3.15	4.25
3	2.50	4.40	5.50
4	3.75	5.65	6.75
5	5.00	6.90	8.00
6	6.25	8.15	9.25
7	7.50	9.40	10.50
8	8.75	10.66	11.75
9	10.00	11.90	13.00
10	11.25	13.15	14.25
11	12.50	14.40	15.50
12	13.75	15.65	16.75
13	15.00	16.90	18.00
14	16.25	18.15	19.25
15	17.50	19.40	20.50

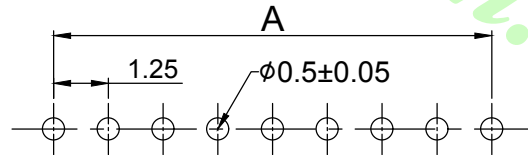

RECOMMENDED PC BOARD HOLE DIMM.

LOCKING WINDOW:  
ONE PLACE FOR 2 AND 3 CKT.  
AND TWO PLACES FOR MORE THAN 3 CKT.

A0	NEW DRAWING	2018.08.16
REV	概述/REVISION	日期/DATE

公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	單位/Unit mm	品名(Title):
X.XX ±0.15	比例/Scale Free	WIRE TO BOARD 1.25mm WAFER DIP 180°
X.X ±0.25	Size A4	料號/Part No:

圖號/Drawing No:	1251-XX-ST-D
料號/Part No:	LW-MX125S-XX-D



**鍊亨電子有限公司**  
LAI HENG TECHNOLOGY LTD.  
TEL: (02) 8228-6487 FAX: (02) 8228-6486

核對/APPD. 7/10	審核/CHKD. Joe	製圖/DR. Mandy	張數/Sheet 1 of 1	REV. A0
---------------	--------------	--------------	-----------------	---------