


SPECIFICATIONS

Current Rating: 1A AC,DC
 Voltage Rating: 100V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ max.
 Insulation Resistance: 500MΩ min.
 Withstand Voltage: 500V AC/minute
 Pin Material: Phosphor Bronze/Tin-plated
 Solder Tabs: Brass/Tin-plated
 Material: Nylon 6T, UL94V-0

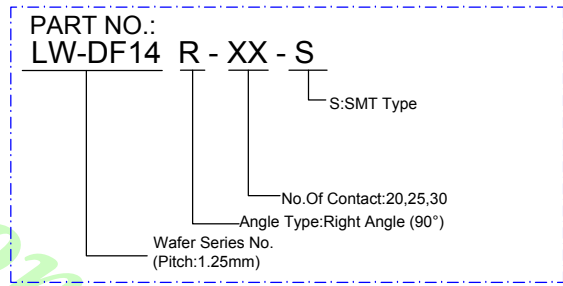

Poles	Dimension mm (in.)		Part No.
	A	B	
20	23.75 (0.935)	30.00 (1.181)	LW-DF14R-20-S
25	30.00 (1.181)	36.25 (1.427)	LW-DF14R-25-S
30	36.25 (1.427)	42.50 (1.673)	LW-DF14R-30-S

公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		單位/Unit mm	品名(Title):
A0	NEW DRAWING	2018.08.16	1.25mm Wire-to-Board Header SMT 90° (DF14 Type)
REV	概述/REVISION	日期/DATE	料號/Part No:
			LW-DF14R-XX-S

圖號/Drawing No:	1251D-XX-RT
----------------	-------------

鍊亨電子有限公司
 LAI HENG TECHNOLOGY LTD.
 TEL: (02) 8228-6487 FAX: (02) 8228-6486

核對/APPD. Joe 審核/CHKD. Joe 製圖/DR. Mandy 張數/Sheet 1 of 1