

Features:

- 2 ~ 12 circuits available
- Material: LCP UL 94-V0
- .025"(0.625mm) square pins
- Tin-plated brass pin
- Mates with LH-MF3600M-xx housing
- Standard color: Black



Specifications:

- Current rating:

Wire size	# 20	# 22	# 24	# 26	# 28	# 30
Ampere	5 A	5 A	4 A	3 A	2 A	1 A

- Voltage rating: 250V
- Contact resistance: 10mΩMax.
- Dielectric strength: 1500V AC/minute
- Temperature rise: 30°C max.

(carry rated current load)

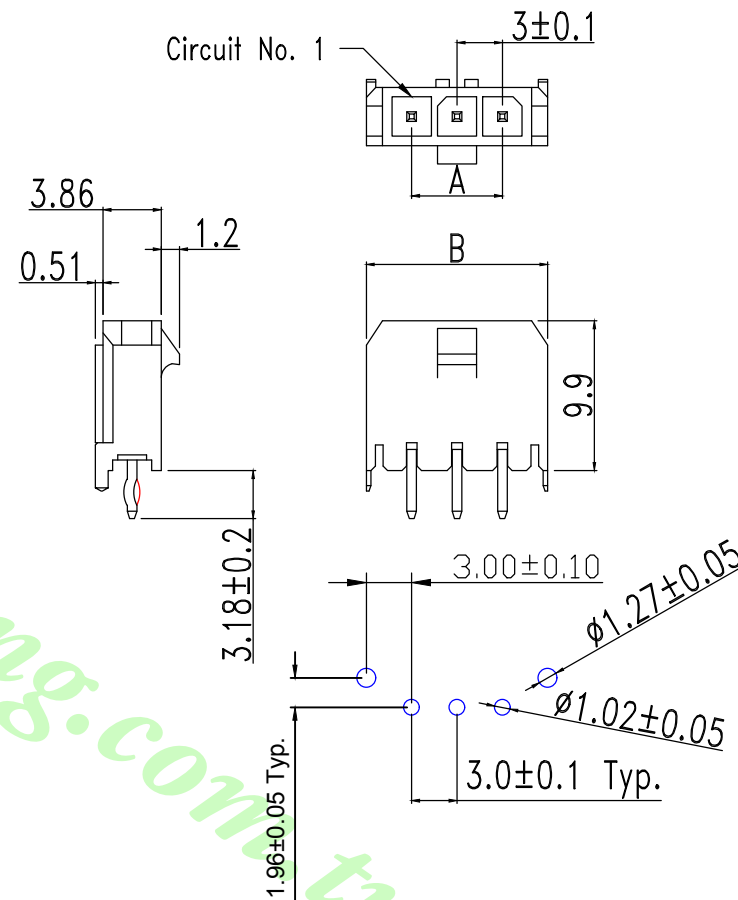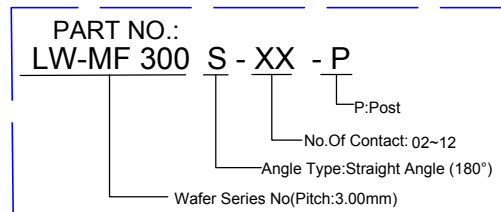

PCB Layout: Component side

Recommended PCB thickness:.062"(1.57mm)

Dimensional Information

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2	3.0	9.65	4	9.0	15.65	6	15.0	21.65	8	21.0	27.65	10	27.0	33.65	12	33.0	39.65
3	6.0	12.65	5	12.0	18.65	7	18.0	24.65	9	24.0	30.65	11	30.0	36.65			

			公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	單位/Unit mm	品名(Title):		鍊亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL: (02) 8228-6487 FAX: (02) 8228-6486
			X.XXX ±0.05	Free	.118" (3.0mm) Single Row Vertical Header (180°)		
A0	NEW DRAWING	2018.08.20	X.XX ±0.15	比例/Scale	料號/Part No:		核對/APPD. 740
REV	概述/REVISION	日期/DATE	X.X ±0.25	A4	LW-MF300S-XX-P		製圖/DR. Mandy
					圖號/Drawing No: 30002WS-N		報數/Sheet 1 of 1
							REV. A0