

position	contact	A	B	C	D
4P	4C	10.00	7.85	10.00	12.00
(6P)4P	4C	12.20	7.85	12.00	14.20
6P	2C/4C/6C	12.20	9.90	12.00	14.20
8P	8C	15.00	11.85	15.00	16.90
10P	10C	15.00	11.85	15.00	16.90

UNIT: m / m TOL: +/- 0.15

### MATERIAL & FINISH


Housing : PBT, UL94V-0, grey or black  
 Insert : PBT, UL94V-0, 8P-gray , 6P&4P-black  
 Conductor: 0.45 diameter phosphor bronze,  
 Gold plated over nickel.  
 Temperature : -40 to +80°C  
 Durability : 500 cycles min.

### ELECTRICAL

Voltage Rating : 125 V  
 Current Rating : 1.5 A  
 Contact Resistance : 30 milliohms max.  
 Insulation Resistance : 500 megaohms min.  
 Dielectric Withstanding Voltage : 1000 V

### ORDERING INFORMATION

8721 a b c d e + f  
 panelstop (N or E)  
 position (4P, 6P, 8P or 10P)  
 contact (2C, 4C, 6C, 8C or 10C)  
 gold plating (06, 15, 30 or 50) u"  
 option (K, D)  
 housing color (GY or BK)  
 GY: gray, BK: black

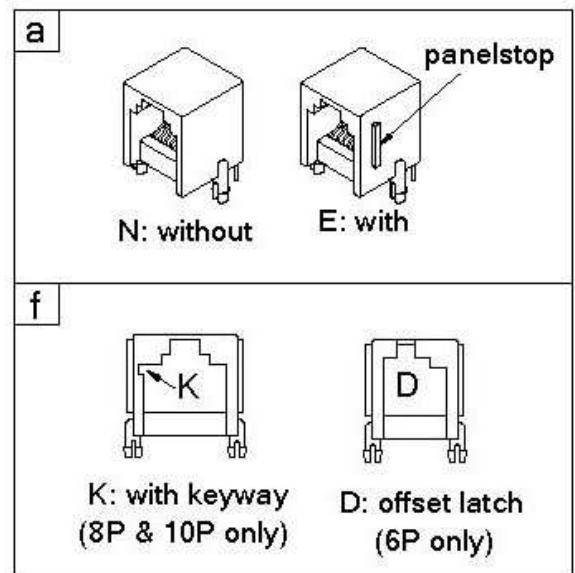

易昕企業有限公司 LEAMAX ENTERPRISE CO.,LTD	
單位: mm	
比例: ---	版次 V1.0
確認: James Chen	DWG NO: 8721-xPxC
繪圖: Amy Shen	
日期: 2009/05/18	