



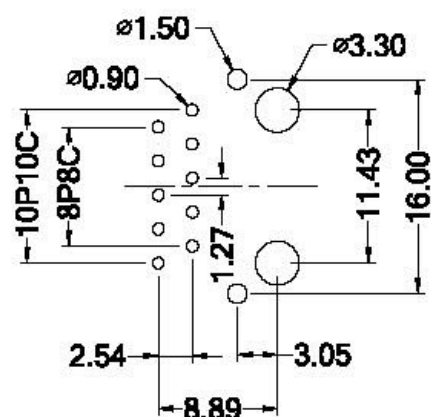

PCB LAYOUT / TOP VIEW / R3.05

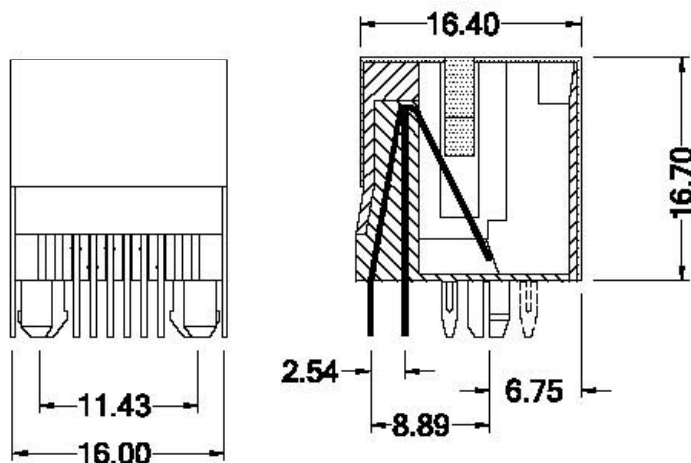

PCB LAYOUT / TOP VIEW / F3.05

MATERIAL & FINISH

Housing & Insert: PBT. UL94V-0, black
Conductor: 0.35 mm thickness phosphor bronze,
Gold plated over nickel on contact area,
Tin plated over nickel on solder area.

Shield: Bronze plated nickel.

Temperature : -40 to 70 °C

Durability : 750 cycles min.

ORDERING INFORMATION

8723S

a b c d (f)

position
(8P or 10P)

contact
(8C or 10C)

tabs
(R3.05 or F3.05)

housing color
(BK) black


gold plating
(06.15.30 or 50) μ "



易昕企業有限公司

LEAMAX ENTERPRISE CO.,LTD

單位: mm



比例：---

版次	V1.0
----	------

確認: James Chen

DWG NO:

 : Amy Shen

8723SxPxC

ELECTRICAL


Voltage Rating : 125 V

Current Rating : 1.5 A

Contact Resistance : 30 milliohms max.

Insulation Resistance : 500 megaohms min.

Dielectric Withstanding Voltage : 1000 V

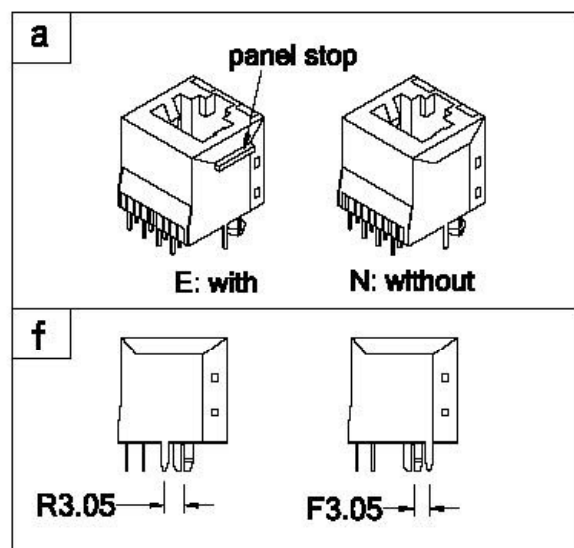

設計變更後圖面
日期：2010/1/21

UNIT: m / m
TOL.: +/- 0.15