

Drawing Number: P8-005-26-□□□□□□

1. Housing Material: Polycarbonate, UL Flammability Rating:

①=UL 94V-0, RoHS Compliant.

②=UL 94V-2, RoHS Compliant.

2. Contacts Type: ①=Straight pin fits Stranded wire only.

②=Two prong angled pin fits Solid/Stranded Wires.

③=Three prong pin fits Solid/Stranded Wires.

3. Gold Plating: ①=Fu" (Flash), ②=2-3u" (0.0508 μm \leq A \leq 0.0762 μm),

③=3u" (\geq 0.0762 μm), ④=6u" (\geq 0.1524 μm),

⑤=15u" (\geq 0.381 μm), ⑥=30u" (\geq 0.762 μm),

⑦=50u" (\geq 1.27 μm).

4. Packaging Quantity: ①=1000pcs, ②=500pcs, ③=250pcs, ④=200pcs

⑤= 100pcs, ⑥= 50pcs, ⑦= 25pcs, ⑧= 10pcs



⑨= Other

5. Housing Color: Transparent, other colors are available.

(Red=RD, Orange=OR, Yellow=YL, Green=GN, Blue=BL, Purple=PU, Black=BK)

6. Shielded Material : Brass with nickel plated, or Non-Shielded.

7. Operating Temperature: -10°C to 60°C.

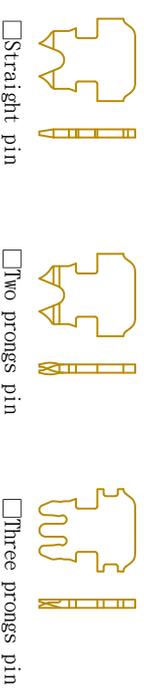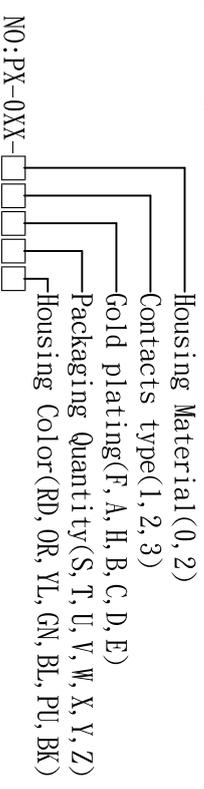

NOTE: TOL: ± 0.1

B	2018/08/01 Rescheduling coding	3RD		Drawing	<i>Sjay</i>	Date	2018/08/01
A	An initial version	Unit	m/m	Checked	<i>Chuis</i>	Date	2018/08/01
Rev	Description	Scale	1:1	Approved	<i>Sason</i>	Date	2018/08/01

UL Code	FT8P8C-S6
Description	C6 Shielded 1.2mm Feed Through Plug



Plug Master
INDUSTRIAL CO., LTD
www.plugmaster.com.tw