




Models	Voltage range	Current range
S 6-40	0 - 6 V	0 - 40 A
S 15-18	0 - 15 V	0 - 18 A
S 28-10	0 - 28 V	0 - 10 A



S280 - SERIES EURO - CASSETTE SWITCHED MODE DC POWER SUPPLIES

Features

- Output programmable from zero till max
- Very high reliability, designed for a long life at full power
- EMC surpasses CE requirements: low emission & high immunity
- Protected against all overload and short circuit conditions
- Very low output ripple and spikes
- Screwdriver adjustment or analog programming

Functionalities

- Master/Slave parallel operation with current sharing
- Optional with external interfaces Ethernet, IEEE488, RS232 or ISO AMP.
- Euro rack mounting or wall mounting
- Redundant parallel operation with a optional RA-10 adapter
- Convection cooling
- Remote sensing

Output		S 6 - 40	S 15 - 18	S 28 - 10
voltage / current		0 - 6 V / 0 - 40 A	0 - 15 V / 0 - 18 A	0 - 28 V / 0 - 10 A
Input				
AC input, full load		100 - 132 V 48 - 62 Hz	100 - 132 V 48 - 62 Hz	100 - 132 V 48 - 62 Hz
DC input		195 - 265 V 48 - 62 Hz	195 - 265 V 48 - 62 Hz	195 - 265 V 48 - 62 Hz
current (220 V AC / 110 V AC)		2.2 / 4.0 Arms	2.3 / 4.2 Arms	2.3 / 4.2 Arms
fuse 220 V / 110 V		4 AT / 6.3 AT	4 AT / 6.3 AT	4 AT / 6.3 AT
Efficiency				
AC input, 220 V, full load		80 %	86 %	88 %
Regulation				
Load 0 - 100%	CV	5 mV	5 mV	5 mV
Line 198 - 265 V AC	CV	5 mV	5 mV	5 mV
Load 0 - 100%	CC	30 mA	10 mA	10 mA
Line 198 - 265 V AC	CC	30 mA	10 mA	10 mA
Ripple + noise, rms / p-p	CV	5 / 25 mV	5 / 25 mV	5 / 25 mV
(BW = 20 MHz)	CC	15 / 50 mA	5 / 15 mA	5 / 15 mA
Programming speed 0 → V _{max}		10 ms	12 ms	15 ms
Output impedance 0-100 kHz	CV	0.1 Ohm	0.1 Ohm	0.1 Ohm
Temp. coeff., per °C	CV		5.10 ⁻⁵	
	CC		1.10 ⁻⁴	
Stability				
during 8 hrs after	CV		5.10 ⁻⁴	
1 hr warmup	CC		1.10 ⁻³	

Analog Programming	CV	CC
Programming inputs input range accuracy input impedance	0 - 5 V $\pm 0.2\%$ - 5 mV / + 12 mV 5 kOhm	0 - 5 V $\pm 0.5\%$ - 4 mV / + 20 mV 5 kOhm
Monitoring output output range accuracy output impedance	not available	0 - 5 V $\pm 0.5\%$ - 6 mV / + 0 mV 20 Ohm

Recovery time

50 - 100% load step : 100 μ s S6-40, S28-10
200 μ s S15-18

Insulation

Input/Output : 3750 Vrms (1 min.)
8 mm creepage/clearance
Input/case : 2500 Vrms (1 min.)
Output/case : 500 V DC

Safety

: EN 60950 EN 61010

EMC

Power Supply Standard : EN 61204-3
Generic Emission : EN 61000-6-3 (EN 55022B)
Generic Immunity : EN 61000-6-2

Operating ambient temp. : -20 to +50 °C

Thermal protection : Output shuts down in case of insufficient cooling

Series operation : Max. 500 V total voltage

Remote sensing : Max. 2 V per lead

OVP adjust range : 5 - 35 V

Mounting : Vertical airflow through the unit should not be obstructed

Cooling : Natural convection cooling, no blower, no noise.

MTBF : 500000 hrs

Standby input power : 4 W

Hold-up time


100 % load, 220 V AC : 20 ms
50 % load, 220 V AC : 40 ms

Dimensions (h x w x d) : 106 x 194.5 x 166 mm


Case : DIN 41494 / IP20

Connectors : H15 (DIN 41612)


Weight : 2.8 kg

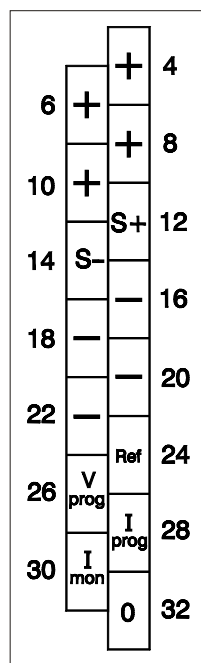


Output connector

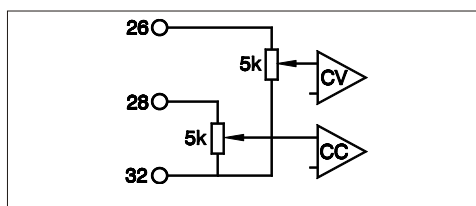


Internal circuit of programming inputs

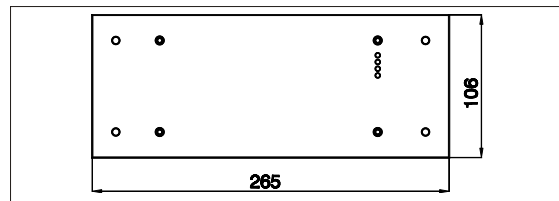


FPW front panel for wall mounting

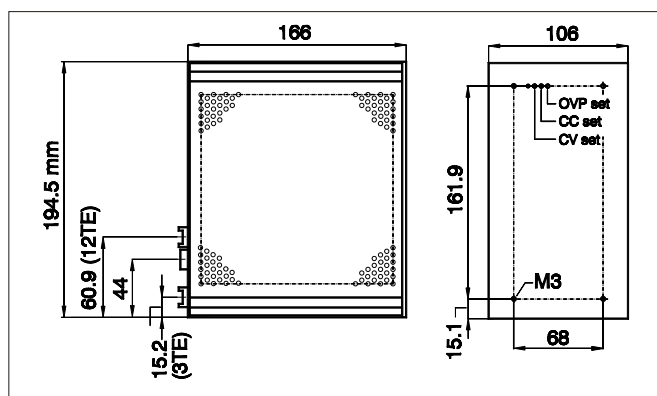

Dimensions

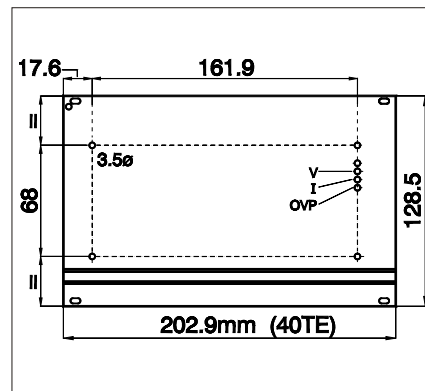

FP40, front panel for Eurocard-rack

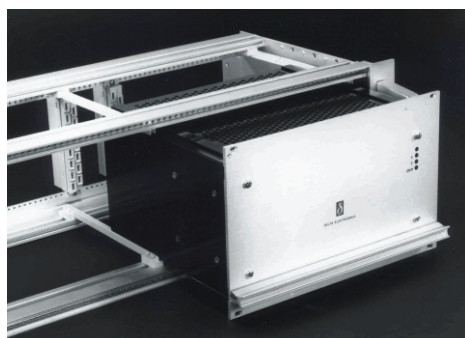

Eurorack mounting
with front panel FP40



Wall mounting with
front panel FPW



Redundant adapter
RA 10 for S28 - 10