





1.27mm Pitch Pin Header Single & Dual Row Single Body Straight DIP TYPE (Dual Row: 1.27*2.54mm)

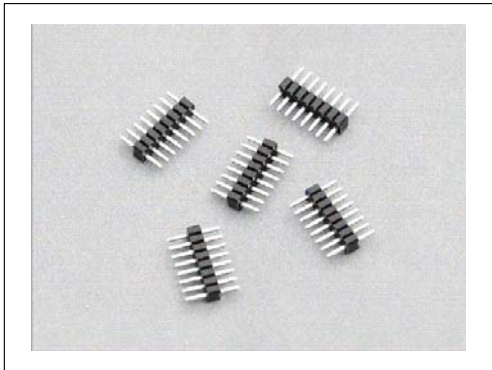

Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy, 0.46x0.46mm.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	1 AMP.
Insulator Resistance:	500 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-40°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

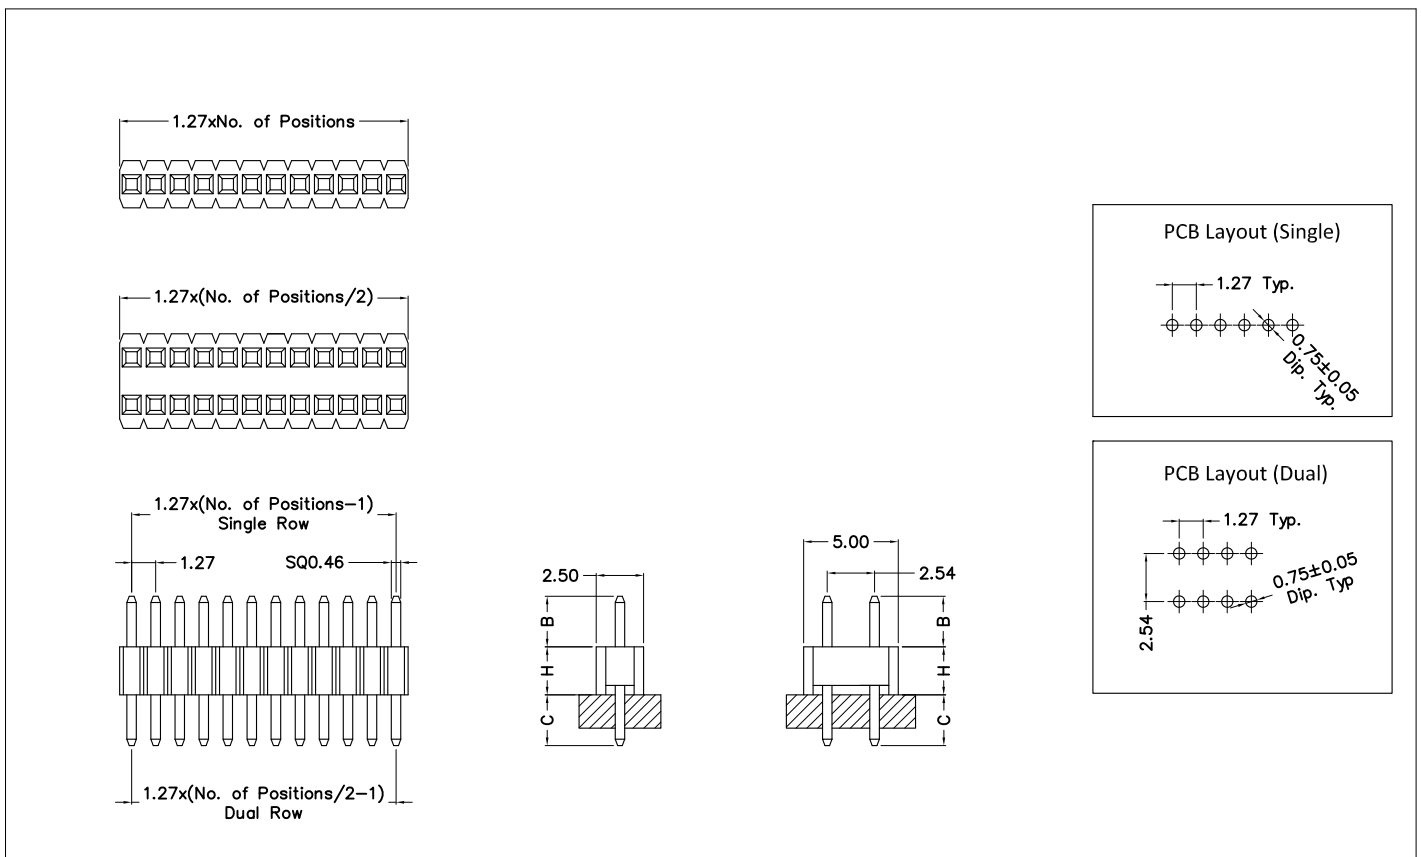

Ordering Information: E12 - XXX - XX - XX - XX - XXX

1 2 3 4 5 6

1 --> Series Number:	E12					
2 --> Contact Positions:	Single row: 002-050PIN		Dual row: 002-100PIN			
3 --> Contact Row:	10: Single Row		20: Dual Row.			
4 --> Dim. "H" option:	10: H=1.70,		11: H=2.54,			
5 --> Dim. "B" & "C" option:	10: B=2.80, C=2.60	20: B=6.00, C=3.00	30: B=5.84, C=3.05	40: B=2.54, C=3.05	50: B=5.84, C=4.45	
	60: B=4.83, C=3.05	61: B=5.21, C=3.05	62: B=7.24, C=3.05	63: B=8.51, C=3.05	64: B=9.91, C=3.05	
	65: B=10.29, C=3.05	66: B=10.92, C=3.05	67: B=12.32, C=3.05	68: B=13.59, C=3.05	69: B=15.37, C=3.05	
	As request: B/C=XX/XX,		For Eg: B=2.80, C=2.60,		Code=2.80/2.60,	
6 --> Plating option:	100: Full Gold Flash Plated		500: Tin Plated		600: Selective Gold Flash Plated	
	610: 10U" selective Gold plated		615: 15U" selective Gold plated			
	620: 20U" selective Gold plated		630: 30U" selective Gold plated			