




# E21


## 1.27mm Pitch Pin Header Single & Dual Row Dual Body Straight DIP TYPE ( Dual Row: 1.27\*1.27mm)

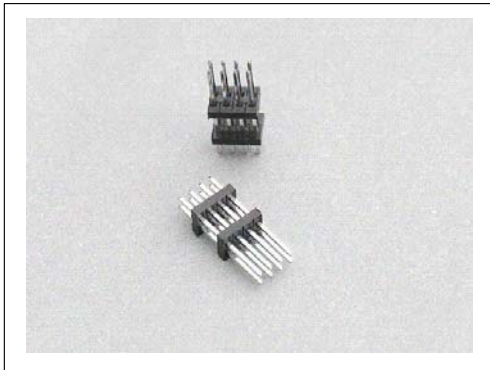

### Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy, 0.40x0.40mm.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	1 AMP.
Insulator Resistance:	500 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-40°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

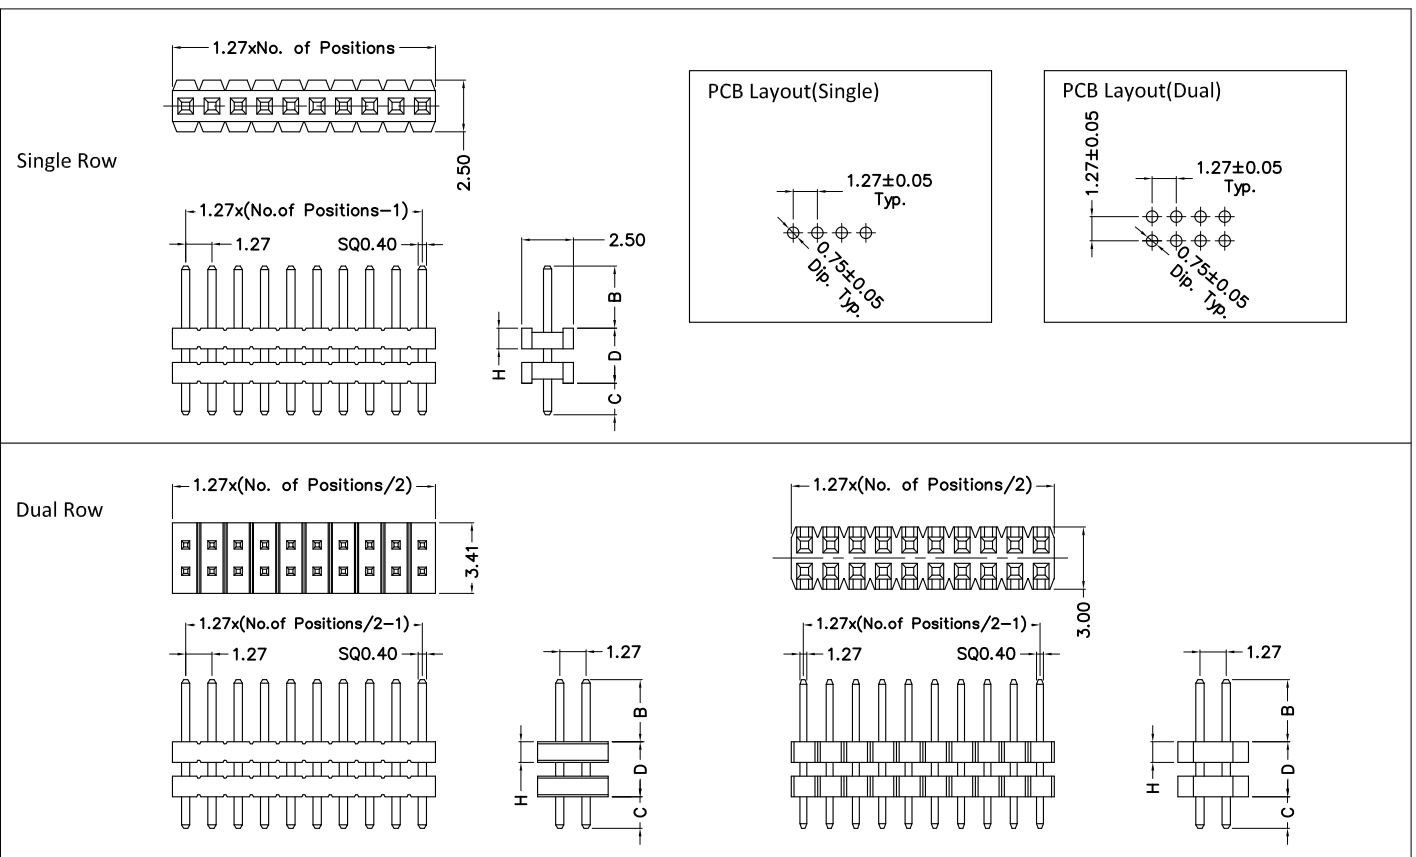

**Ordering Information:** E21 - XXX - XX - XX - XX - XXX

1
2
3
4
5
6

1 --> Series Number:	E21		
2 --> Contact Positions:	Single Row: 002~050,	Dual Row: 004~100,	
3 --> Insulator option:	Single Row: 10: H=1.00,	11: H=1.70,	12: H=2.50,
	Dual Row: 20: H=1.00,	21: H=1.60,	22: H=2.50,
4 --> Dim. "B & C" option:	10: B=1.65, C=2.29,	11: B=1.65, C=1.91,	12: B=1.65, C=1.14, 13: B=3.00, C=2.85,
	As request: B/C=XX/XX, For Eg: B=3.00, C=2.85, Code=3.00/2.85,		
5 --> Stacker Height option:	10: D=2.35,	11: D=6.35,	
	As request: D=XX, For Eg: D=6.75, Code=6.75,		
6 --> Plating option:	100: Full Gold Flash Plated	500: Tin Plated	600: Selective Gold Flash Plated
	610: 10U" selective Gold plated	615: 15U" selective Gold plated	
	620: 20U" selective Gold plated	630: 30U" selective Gold plated	