




# E24


## 1.27mm Pitch Pin Header Dual Row Single Body Vertical & Horizontal SMT TYPE ( Dual Row: 1.27\*1.27mm )

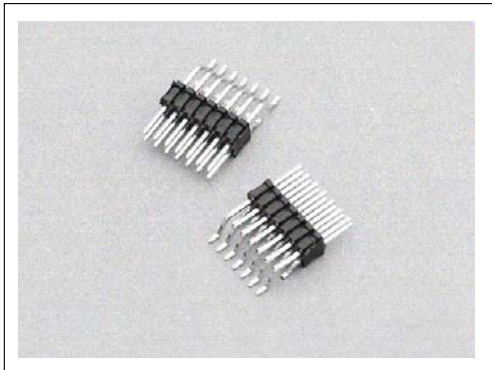

### Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy, 0.40x0.40mm.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	1 AMP.
Insulator Resistance:	500 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-40°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

### RoHS Compliant

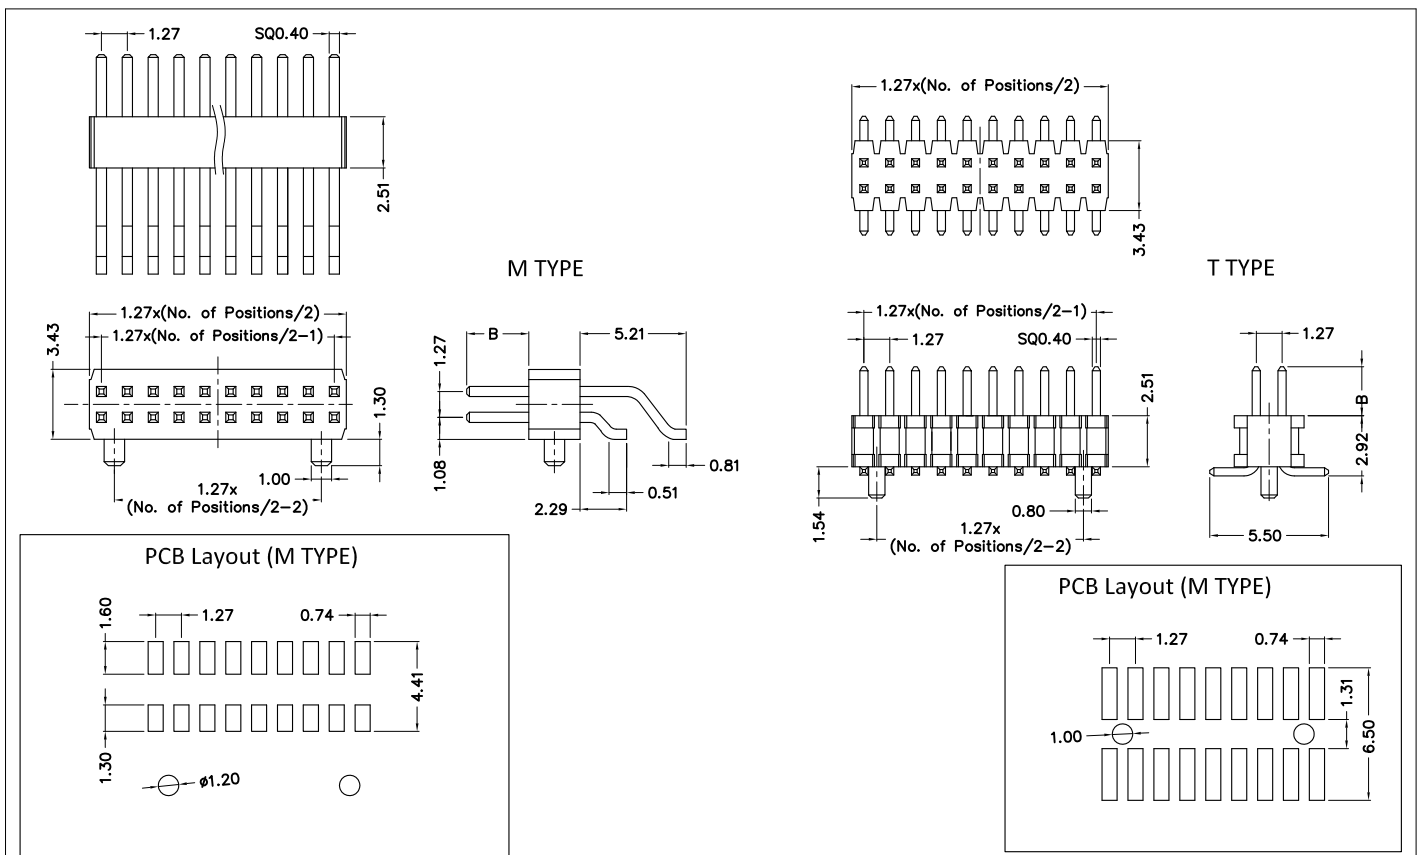

### Ordering Information: E24 - XXX - XX - XX - XXX - XX - X - XX

1 --> Series Number:	E24							
2 --> Contact Positions:	4~70Pin: 004~070,							
3 --> Connector Type:	10: M TYPE,				11: T TYPE			
4 --> Dim. "B" option:	10: B=1.65,	11: B=1.91,	12: B=3.05,	13: B=3.81				
5--> Plating option:	100: Full Gold Flash Plated,		500: Tin Plated,		600: Selective Gold Flash Plated			
	610: 10U" selective Gold plated,		615: 15U" selective Gold plated					
	620: 20U" selective Gold plated,		630: 30U" selective Gold plated					
6 --> CAP option:	00: Without CAP,				01: With CAP,			
7 --> Packing option:	2: Tube,				3: T&R,			
8 --> Location Peg option:	00: Without Peg,				01: With Peg,			