





1.27mm Pitch Pin Header Dual Row Single Body Vertical C & J & K & S SMT TYPE (1.27*1.27mm)

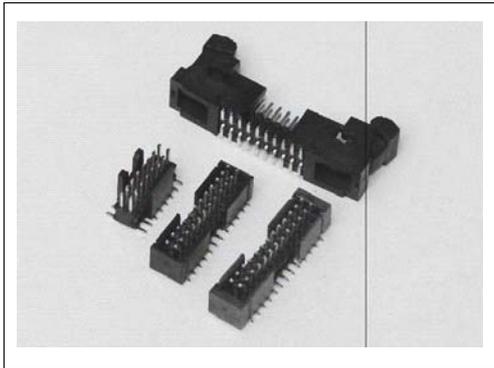

Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy, 0.40x0.40mm.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	1 AMP.
Insulator Resistance:	500 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-40°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

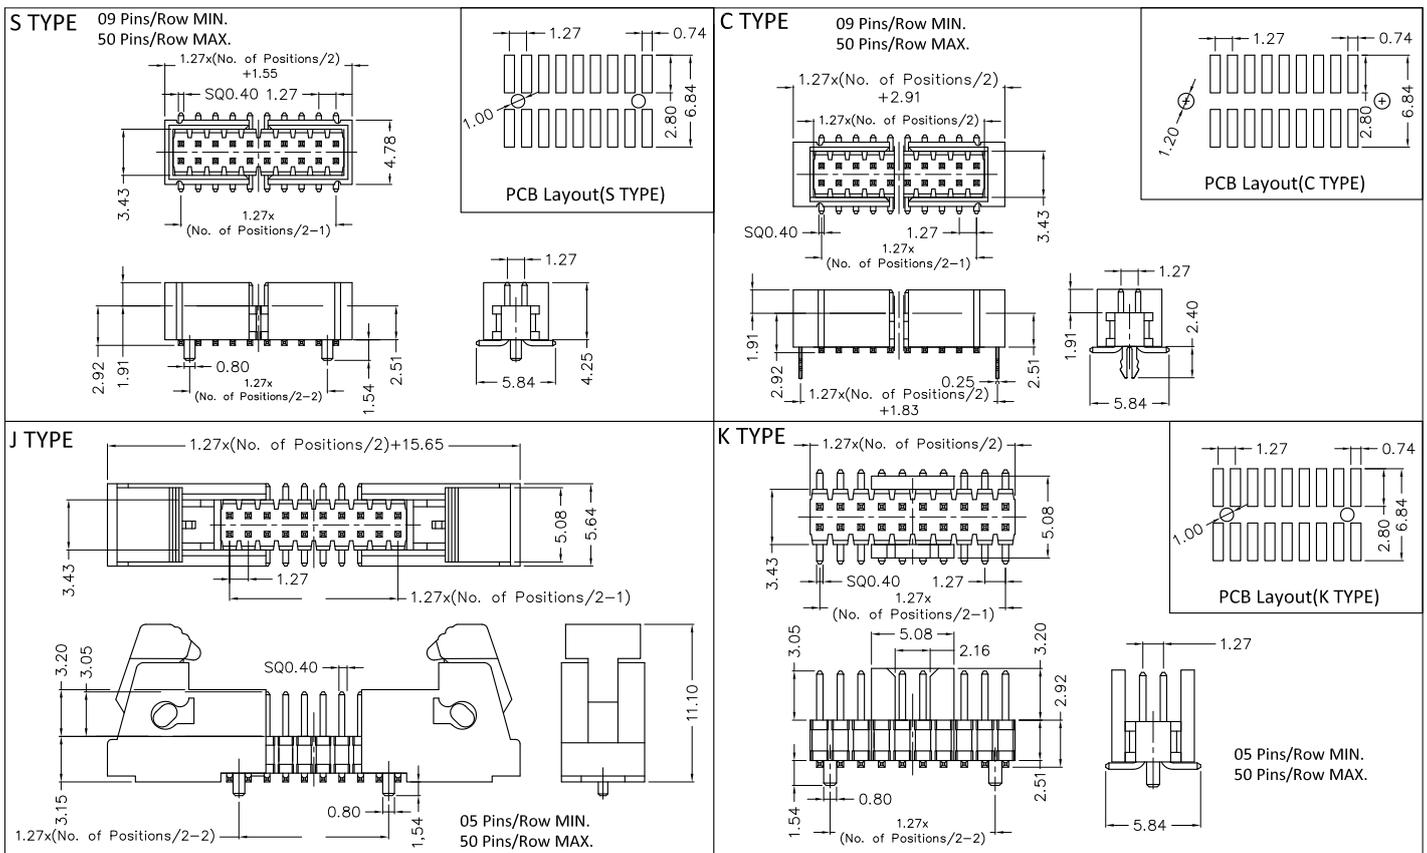

Ordering Information: E28 - XXX - XX - XXX - XX - X - XX

1 --> Series Number:	E28						
2 --> Contact Positions:	10~100Pin: 010~100,						
3 --> Connector Type:	10: C TYPE,	11: J TYPE,	12: K TYPE,	13: S TYPE,			
4 --> Plating option:	100: Full Gold Flash Plated,	500: Tin Plated,	600: Selective Gold Flash Plated				
	610: 10U" selective Gold plated,	615: 15U" selective Gold plated					
	620: 20U" selective Gold plated,	630: 30U" selective Gold plated					
5 --> CAP option:	00: Without CAP,	01: With CAP,					
6 --> Packing option:	2: Tube,	3: T&R,					
7 --> Location Peg option:	00: Without Peg,	01: With Peg,					