




# E33


## 2.00mm Pitch Box Header Dual Row Dual Body Straight DIP TYPE & Vertical SMT TYPE

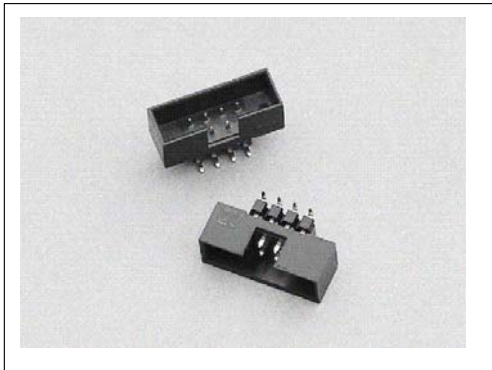

### Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy, 0.50x0.50mm.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	1 AMP.
Insulator Resistance:	500 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-55°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

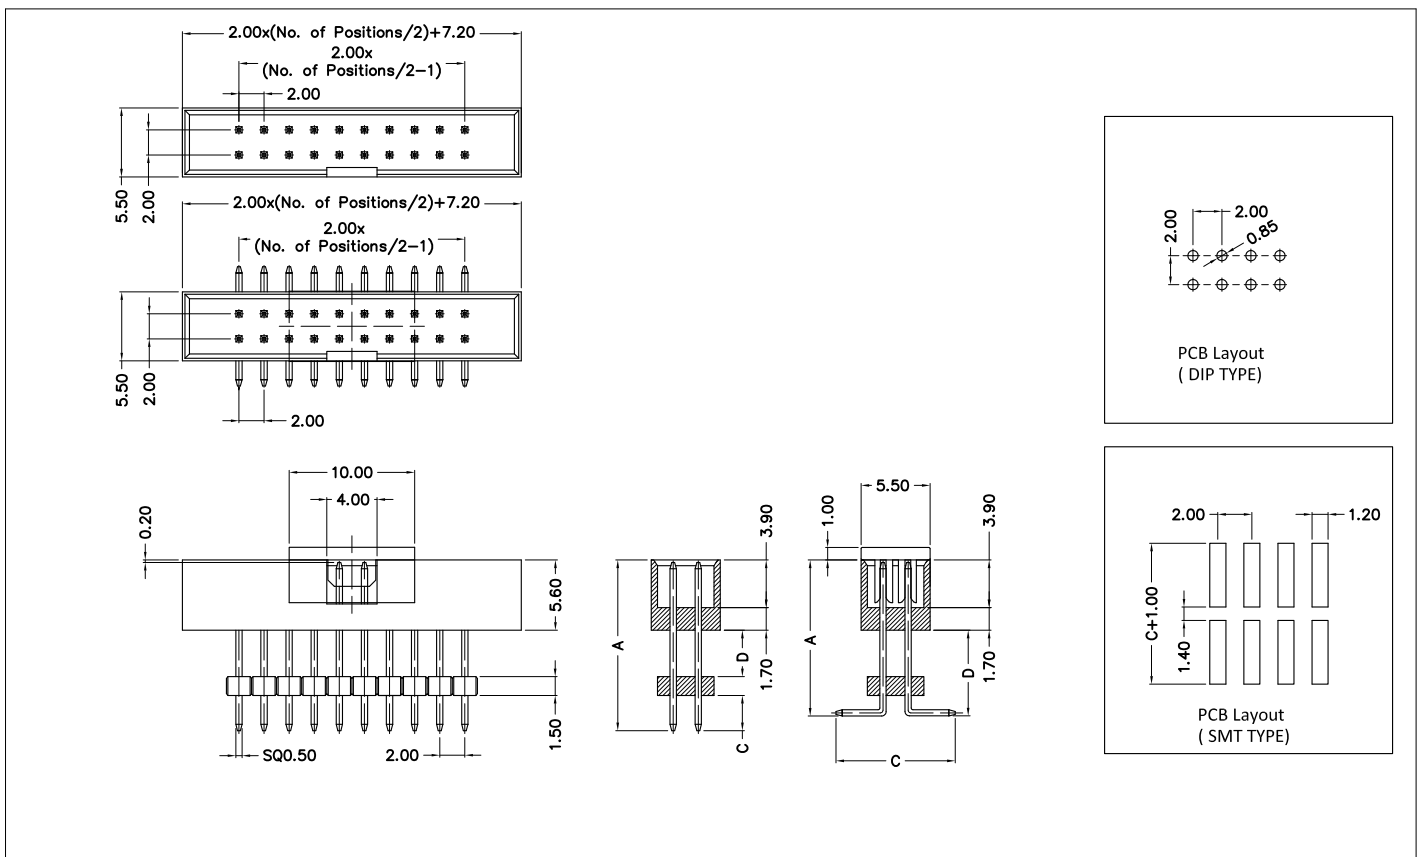

**Ordering Information:**    E33 - XXX - XX - XX/XX/XX - XXX - XX - X  
   1     2     3            4            5     6     7

1 --> Series Number:	E33		
2 --> Contact Positions:	06-68PIN: 06-68		
3 --> Connector Type:	10: DIP TYPE,                    20: SMT TYPE		
4 --> Dim. " A, C, D " option:	As request: A/C/D=XX/XX/XX,                    For Eg: A=7.00, C=7.80, D=6.50,		Code=7.00/7.80/6.50,
5--> Plating option:	100: Full Gold Flash Plated,                    500: Tin Plated,                    600: Selective Gold Flash Plated		
	610: 10U" selective Gold plated,		615: 15U" selective Gold plated
	620: 20U" selective Gold plated,		630: 30U" selective Gold plated
6 --> CAP option: ( For SMT TYPE only)	00: Without CAP,		11: With CAP,
7 --> Packing option:	2: Tube,		3: T&R,