




E37


2.00mm Pitch Pin Header Single & Dual Row Single Body Vertical SMT TYPE

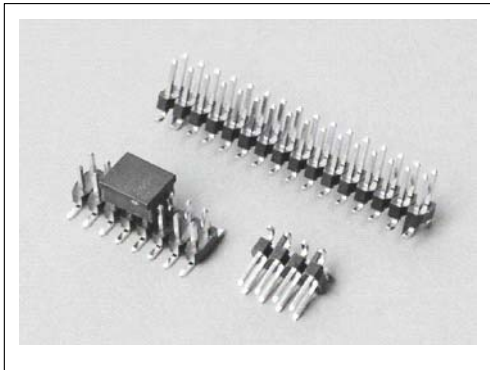

Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy, 0.50x0.50mm.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	1 AMP.
Insulator Resistance:	500 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-40°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

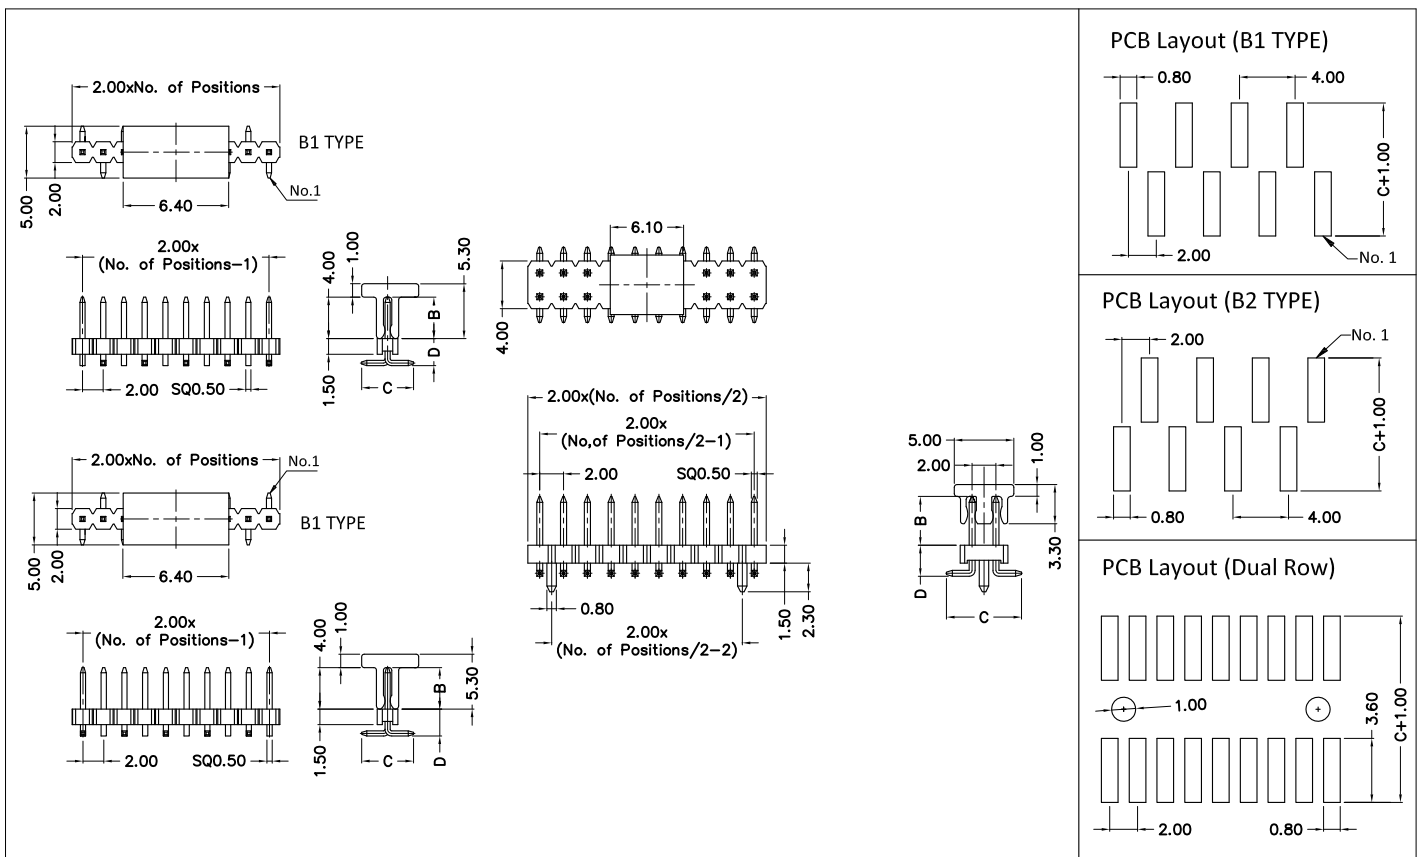

Ordering Information: E37 - XXX - XX - XX - XXX - XX - X - XX
 1 2 3 4 5 6 7 8

1 --> Series Number:	E37
2 --> Contact Positions:	Single Row: 003-040, Dual Row: 004-080,
3 --> Layout option:	10: Single B1 TYPE, 11: Single B2 TYPE, 20: Dual Row
4 --> Dimensions option:	10: B=4.00, C=7.00, D=2.60, 11: B=4.00, C=6.00, D=2.60, As request: B/C/D=XX/XX/XX, For Eg: B=3.20, C=6.50, D=2.80, Code=3.20/6.50/2.80,
5 --> Plating option:	100: Full Gold Flash Plated, 500: Tin Plated, 600: Selective Gold Flash Plated 610: 10U" selective Gold plated, 615: 15U" selective Gold plated 620: 20U" selective Gold plated, 630: 30U" selective Gold plated
6 --> CAP option:	00: Without CAP, 11: With CAP,
7 --> Packing option:	2: Tube, 3: T&R,
8 --> Location Peg option: (For Dual Row only)	00: Without Peg, 11: With Peg,