




E41


2.00mm Pitch Pin Header Dual Row Single Body Horizontal M & D SMT TYPE

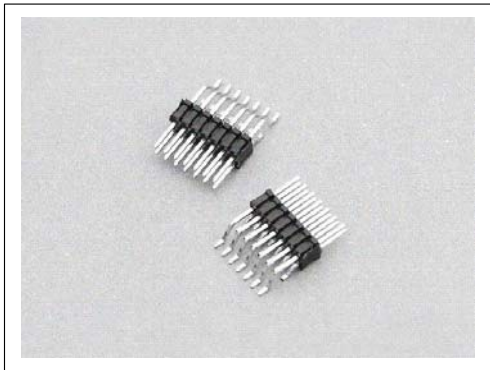

Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy, 0.50x0.50mm.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	1 AMP.
Insulator Resistance:	500 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-40°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

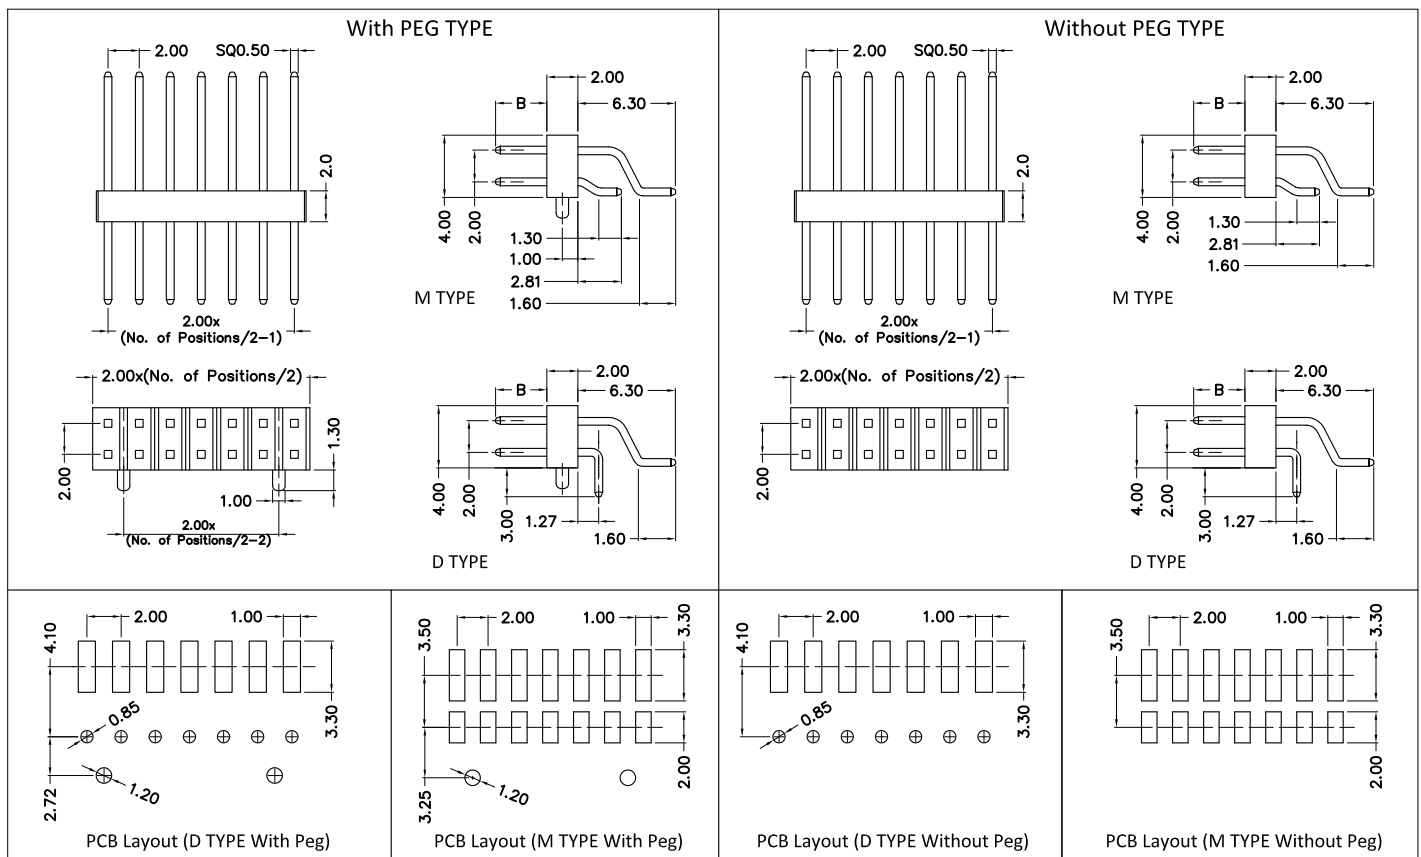

Ordering Information: E41 - XXX - XX - XX - XXX - XX - X - XX

1
2
3
4
5
6
7
8

1 --> Series Number:	E41		
2 --> Contact Positions:	6-72Pin: 006-072,		
3 --> Connector Type:	10: M TYPE, 11: D TYPE,		
4 --> Dim. "B" option:	10: B=3.20, 11: B=4.00, 12: B=4.45,	As request: B=XX,	For Eg: B=2.80, Code=2.80,
5--> Plating option:	100: Full Gold Flash Plated,	500: Tin Plated,	600: Selective Gold Flash Plated
	610: 10U" selective Gold plated,	615: 15U" selective Gold plated	
	620: 20U" selective Gold plated,	630: 30U" selective Gold plated	
6 --> CAP option:	00: Without CAP, 01: With CAP,		
7 --> Packing option:	2: Tube, 3: T&R,		
8 --> Location Peg option:	00: Without Peg,	01: With Peg H=1.30,	02: With Peg H=2.50 (only packed with tube),