




E53


2.54mm Pitch Pin Header Single & Dual Row Dual Body Straight DIP TYPE

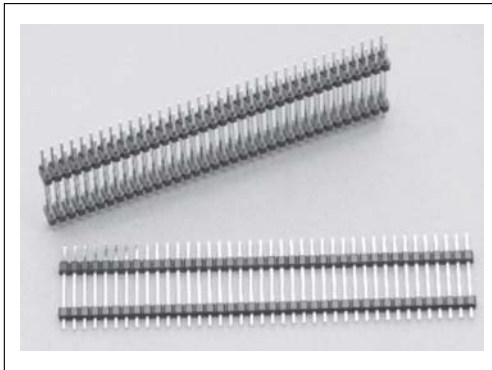

Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy, 0.635x0.635mm.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	3 AMP.
Insulator Resistance:	5000 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-40°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

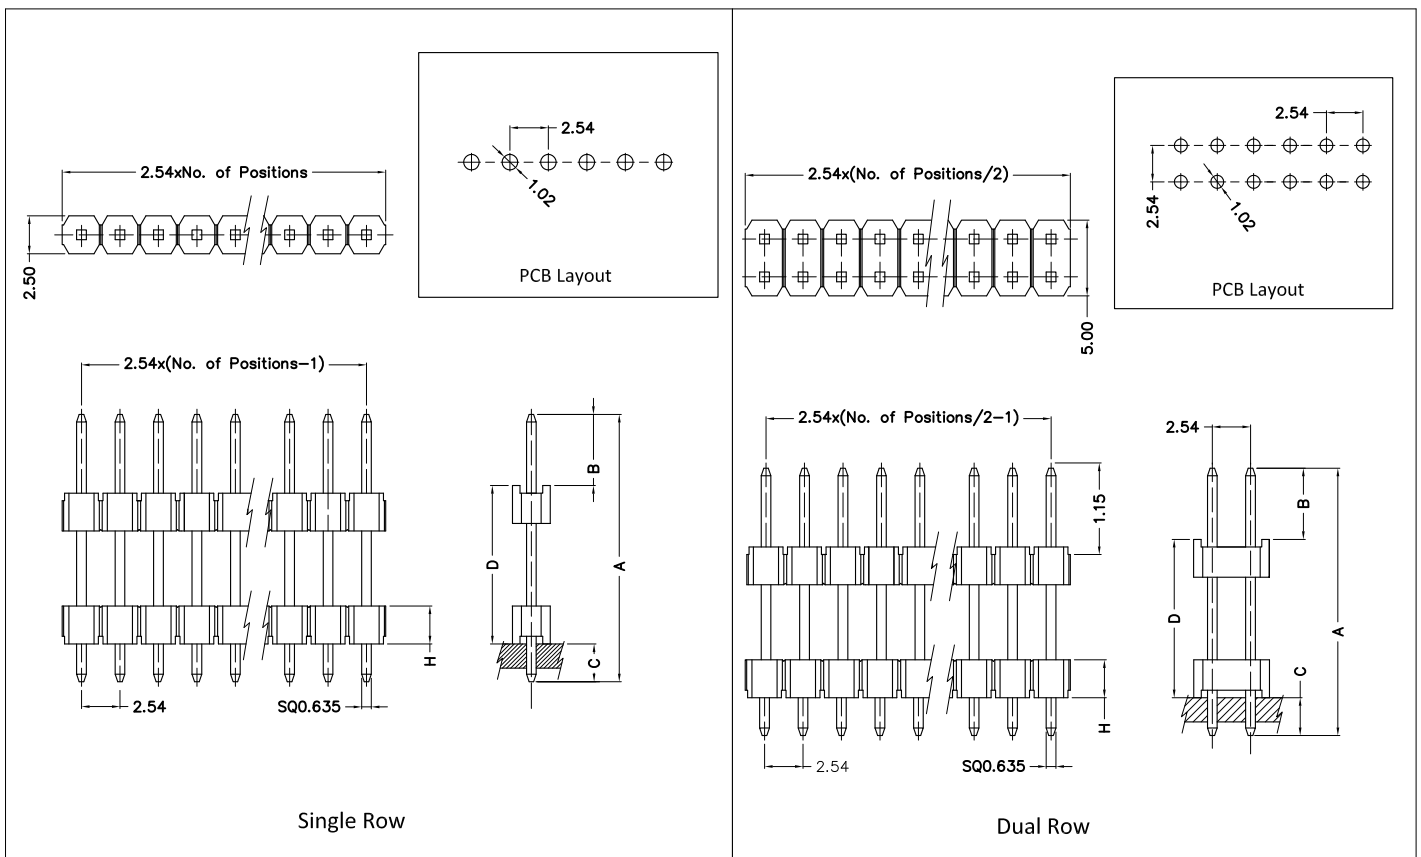

Ordering Information: E53 - XXX - XX - XX - XX - XXX
 1 2 3 4 5 6

1 --> Series Number:	E53	
2 --> Contact Positions:	Single Row: 001~050,	Dual Row: 004~100,
3 --> Contact Row:	10: Single Row,	20: Dual Row,
4 --> Insulator option:	10: H=1.70,	11: H=2.50,
5 --> Dim. "A, B, C, D" option:	10: A=17.70, B=5.70, C=3.30, D=8.70, 11: A=19.80, B=5.70, C=3.30, D=10.80, 12: A=21.60, B=5.70, C=3.30, D=12.60, 13: A=22.80, B=5.70, C=3.30, D=13.80, 14: A=24.90, B=5.70, C=3.30, D=15.90, 15: A=26.70, B=5.70, C=3.30, D=17.70, 16: A=30.80, B=5.70, C=3.30, D=21.80, 17: A=37.80, B=5.70, C=3.30, D=28.80, 18: A=40.80, B=5.70, C=3.30, D=31.80, As request: A/B/C/D=XX/XX/XX/XX, For Eg: A=19.10, B=5.70, C=3.30, D=8.70, Code=19.10/5.70/3.30/8.70,	
6 --> Plating option:	100: Full Gold Flash Plated, 500: Tin Plated, 600: Selective Gold Flash Plated 610: 10U" selective Gold plated, 615: 15U" selective Gold plated 620: 20U" selective Gold plated, 630: 30U" selective Gold plated	