




# E59


## 2.54mm Pitch Pin Header Dual Row Single Body Vertical SMT TYPE

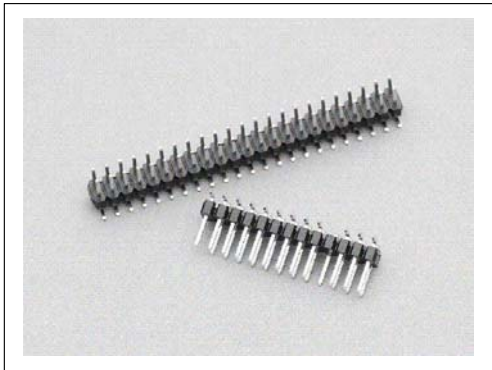

### Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy, 0.635x0.635mm.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	3 AMP.
Insulator Resistance:	5000 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-40°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

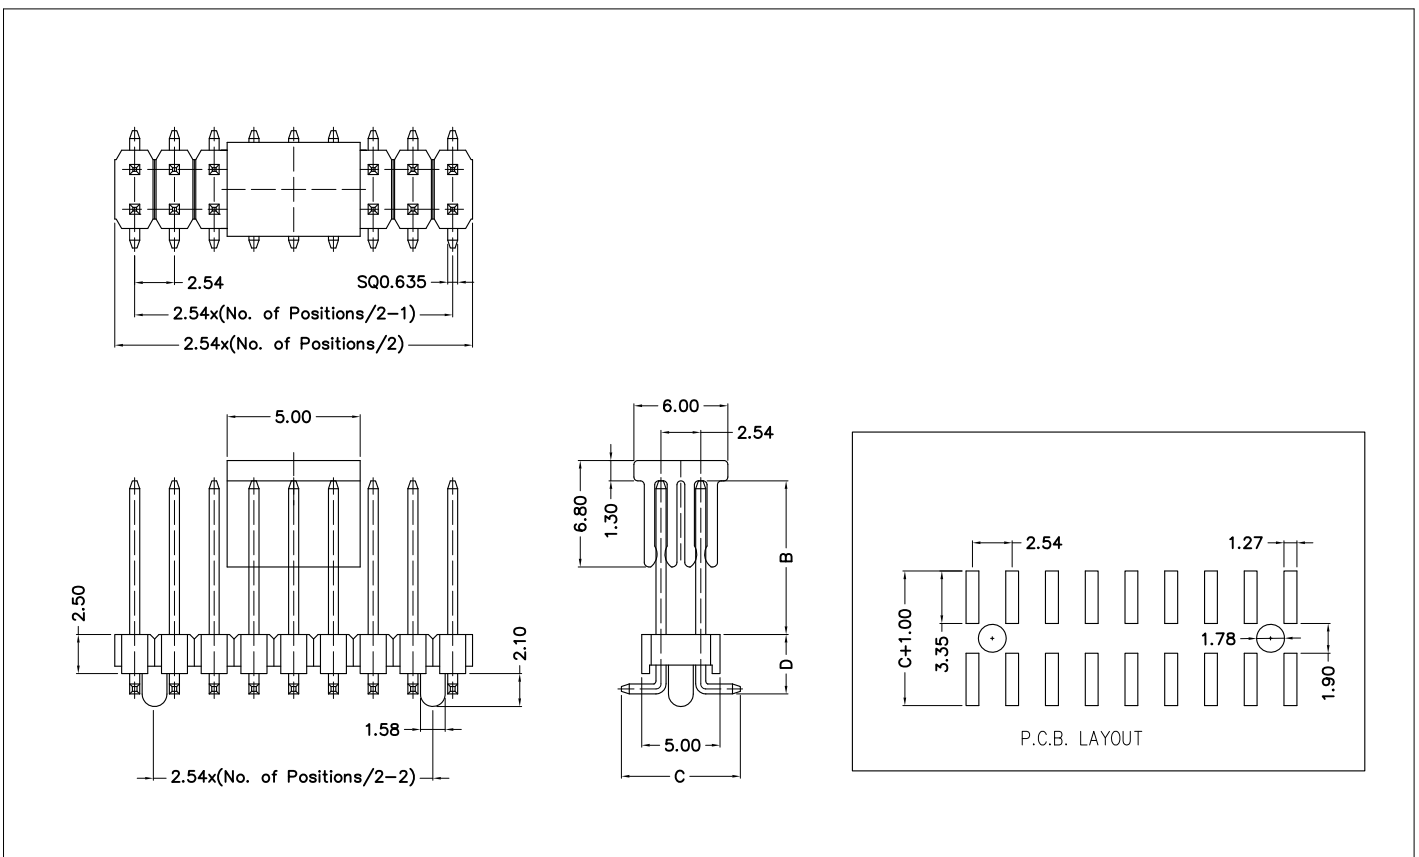

### Ordering Information: E59 - XXX - XX - XXX - XX - X - XX

1
2
3
4
5
6
7

1 --> Series Number:	E59
2 --> Contact Positions:	4-60Pin: 004-060,
3 --> Dimension option:	10: B=3.50,C=7.60,D=3.80,    11: B=4.80, C=7.60,D=3.80,    12: B=6.10, C=7.60, D=3.80,    13: B=6.90, C=7.60,D=3.80, 14: B=9.90, C=7.60,D=3.80,    15: B=5.84, C=7.60,D=3.80,    16: B=8.13,C=7.60,D=3.80,    17: B=10.67, C=7.60, D=3.80, As request: B/C/D=XX/XX/XX,    For Eg: B=4.60, C=6.00, D=3.90,    Code=4.60/6.00/3.90,
4 --> Plating option:	100: Full Gold Flash Plated,    500: Tin Plated,    600: Selective Gold Flash Plated 610: 10U" selective Gold plated,    615: 15U" selective Gold plated 620: 20U" selective Gold plated,    630: 30U" selective Gold plated
5 --> CAP option:	00: Without CAP,    01: With CAP,
6 --> Packing option:	2: Tube,    3: T&R,
7 --> Location Peg option:	00: Without Peg,    01: With Peg,