




E65


2.54mm Pitch Pin Header Single Row Single Body Horizontal "M" SMT TYPE

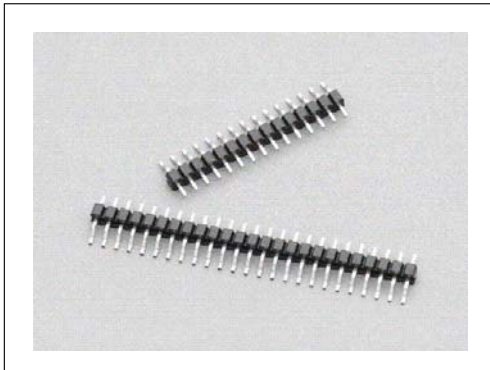

Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy, 0.635x0.635mm.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	3 AMP.
Insulator Resistance:	5000 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-40°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

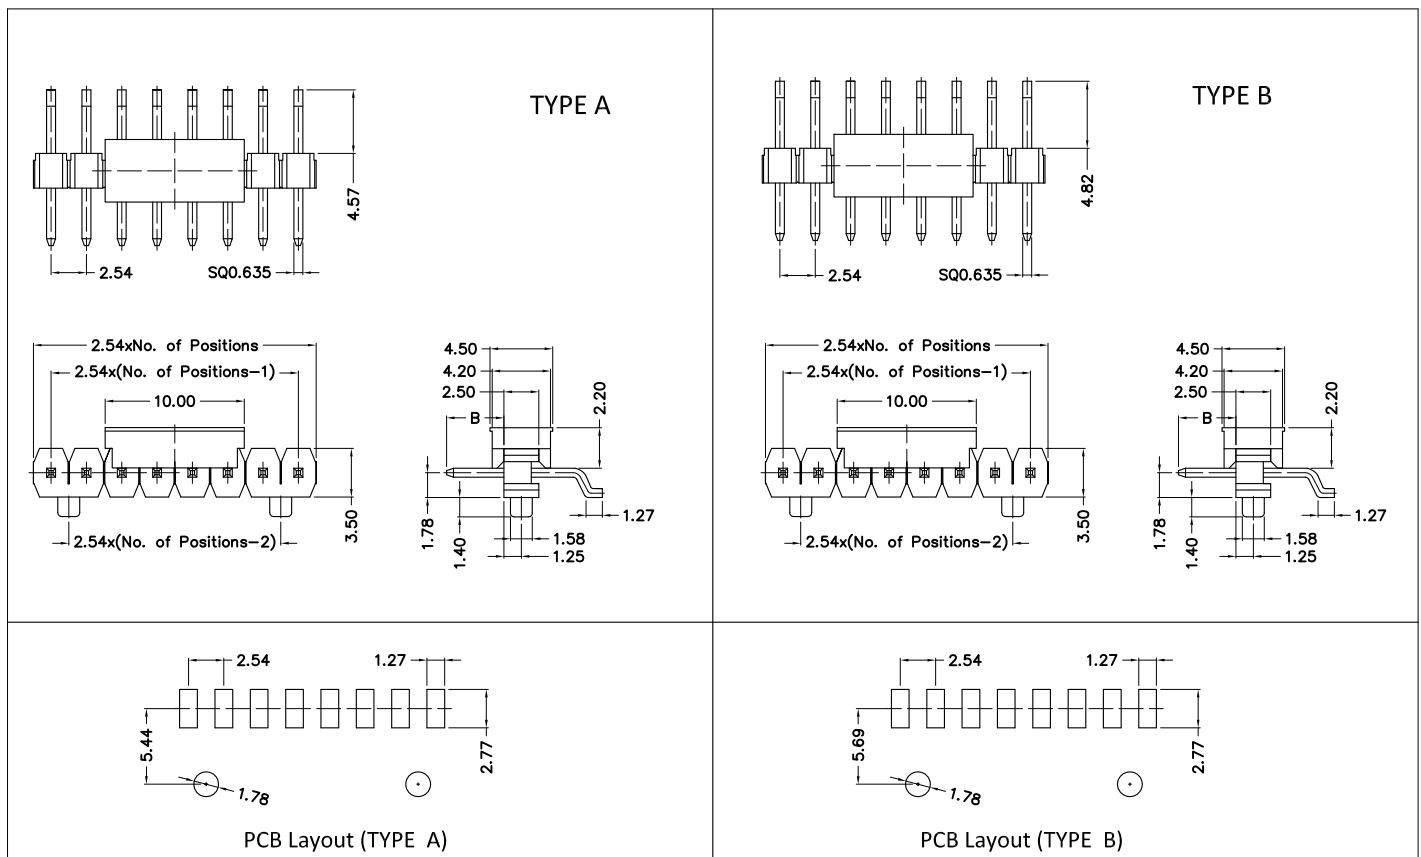

Ordering Information: E65 - XXX - XX - XX - XXX - XX - X - XX

1 2 3 4 5 6 7 8

1 --> Series Number:	E65	
2 --> Contact Positions:	2-30PIN: 002-030,	
3 --> Connector Type:	10: TYPE A, 11: TYPE B,	
4 --> Dim. "B" option:	10: B=3.05, 11: B=5.84, 12: B=8.13, 13: B=10.67, As request: B=XX, For Eg: B=4.00, Code=4.00,	
5--> Plating option:	100: Full Gold Flash Plated, 500: Tin Plated, 600: Selective Gold Flash Plated 610: 10U" selective Gold plated, 615: 15U" selective Gold plated 620: 20U" selective Gold plated, 630: 30U" selective Gold plated	
6 --> CAP option:	00: Without CAP, 01: With CAP,	
7 --> Packing option:	2: Tube, 3: T&R,	
8 --> Location Peg option:	00: Without Peg, 01: With Peg,	