




# F30

## 2.54mm Pitch Female Header Dual Row Straight DIP TYPE ( H=3.51 & 5.00mm )



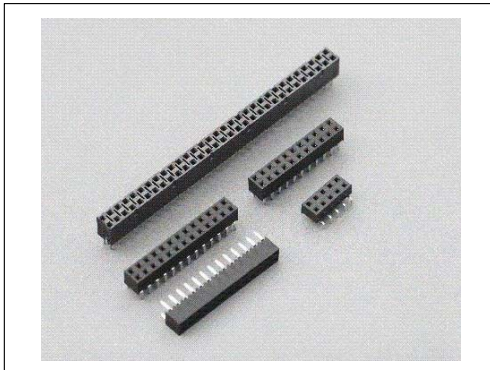


### Specification:



Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	3 AMP.
Contact Resistance:	20 Milliohms Max.
Insulator Resistance:	1000 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-40°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant


Profile H=5.00

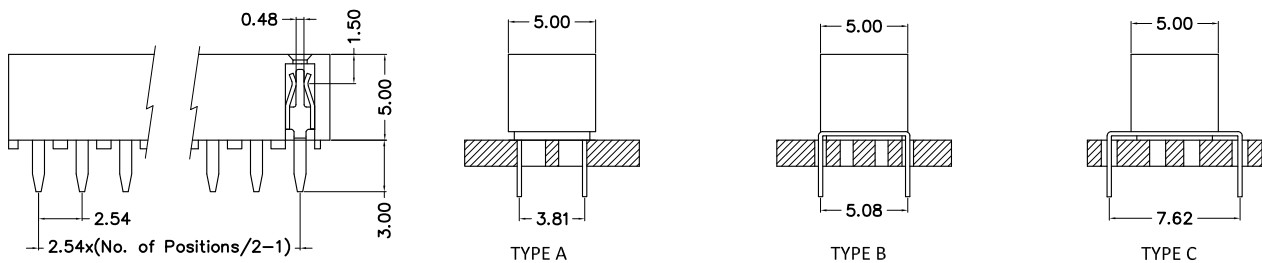


Profile H=3.51

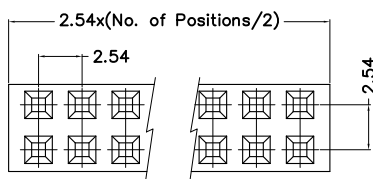

PCB Layout ( Type A )



PCB Layout ( Type B )



PCB Layout ( Type C & Type D )

### Ordering Information: F30 - XXX - XX - XXX

1 --> Series Number:	F30		
2 --> Contact Positions:	4~80Pin: 004~080,		
3 --> Connector Type:	10: H=5.00 TYPE A,	11: H=5.00 TYPE B,	12: H=5.00 TYPE C,
	13: H=3.51 TYPE D,		
4--> Plating option:	100: Full Gold Flash Plated,	500: Tin Plated,	600: Selective Gold Flash Plated
	610: 10U" selective Gold plated,	615: 15U" selective Gold plated	
	620: 20U" selective Gold plated,	630: 30U" selective Gold plated	