




# F36


## 2.54mm Pitch Female Header Single & Dual Row Right Angle DIP & SMT TYPE

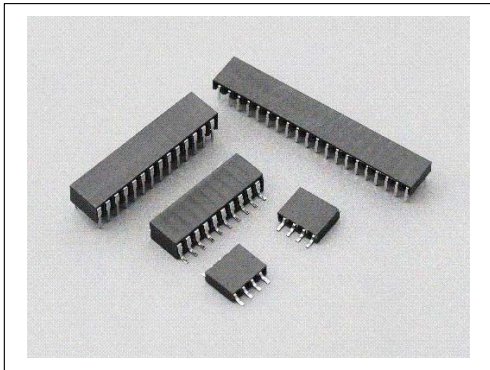

### Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	3 AMP.
Contact Resistance:	20 Milliohms Max.
Insulator Resistance:	1000 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-40°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

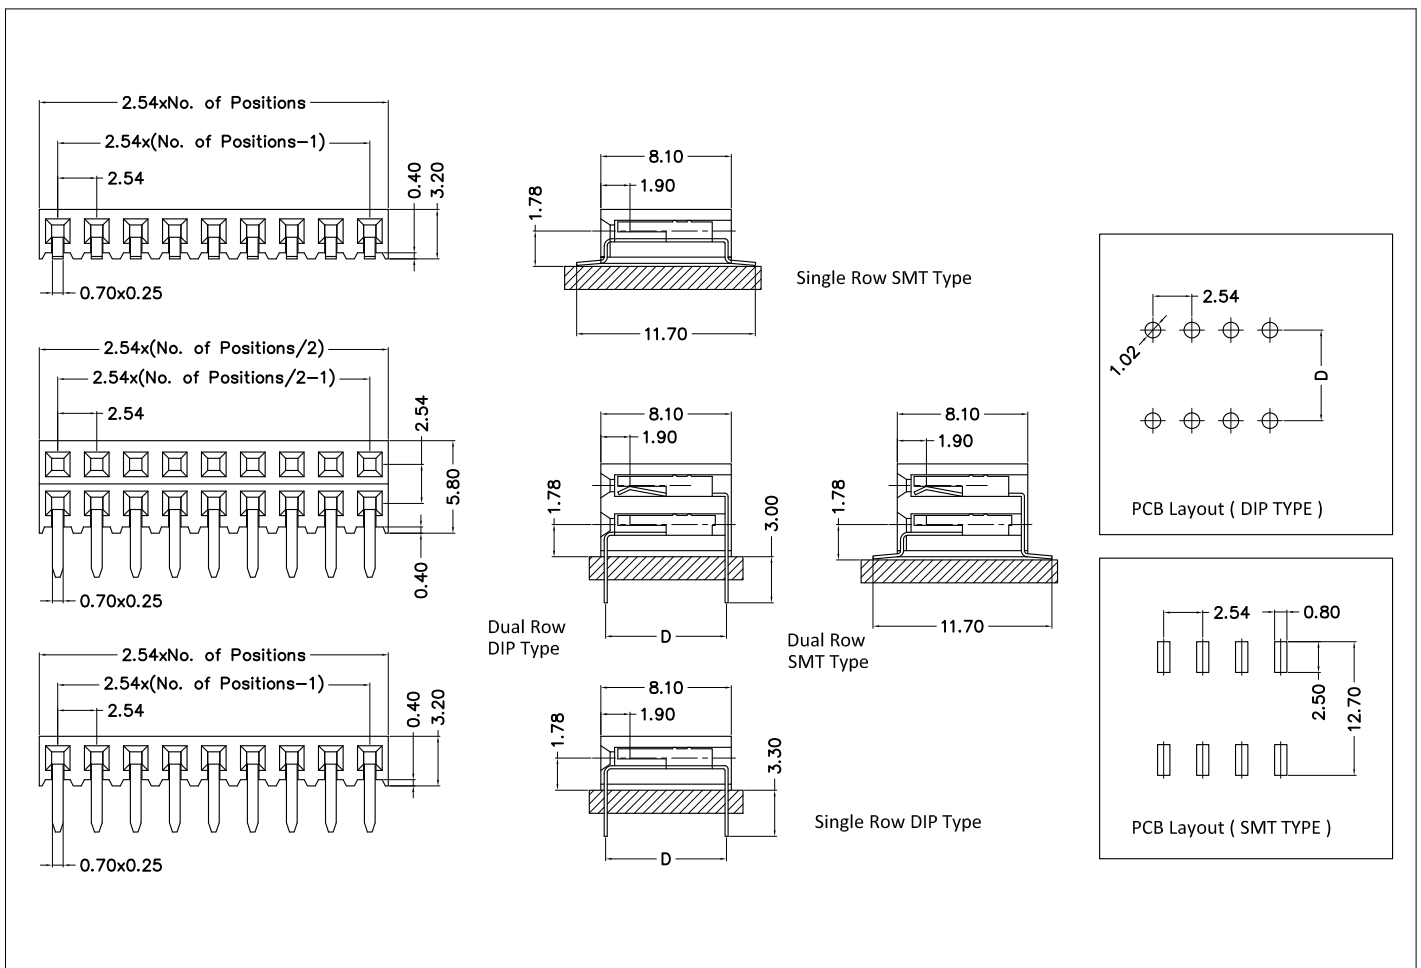

### Ordering Information: F36 - XXX - XX - XXX - X - XX

1 --> Series Number:	F36		
2 --> Contact Positions:	Single Row: 002~040,	Dual Row: 006~080,	
3 --> Connector Type:	10: Single Row DIP Type,	11: Single Row SMT Type,	
	20: Dual Row DIP Type,	21: Dual Row SMT Type,	
4 --> Plating option:	100: Full Gold Flash Plated,	500: Tin Plated,	600: Selective Gold Flash Plated
	610: 10U" selective Gold plated,	615: 15U" selective Gold plated	
	620: 20U" selective Gold plated,	630: 30U" selective Gold plated	
5 --> Packing option:	1: Tray,	2: Tube,	3: T&R,
6 --> Dimension option: ( For DIP Type only )	10: D=7.87,	11: D=7.62,	