




F43


2.54mm Pitch Female Header Dual Row Vertical SMT TYPE (H=7.40 & 8.70mm)

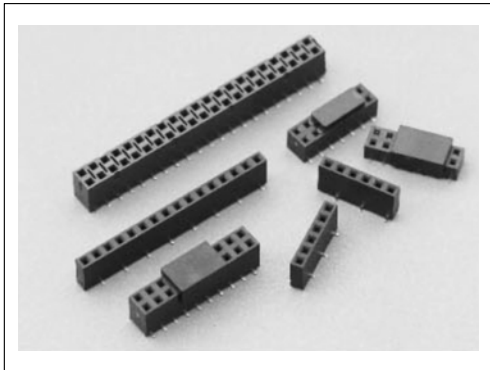

Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	3 AMP.
Contact Resistance:	20 Milliohms Max.
Insulator Resistance:	1000 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-40°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

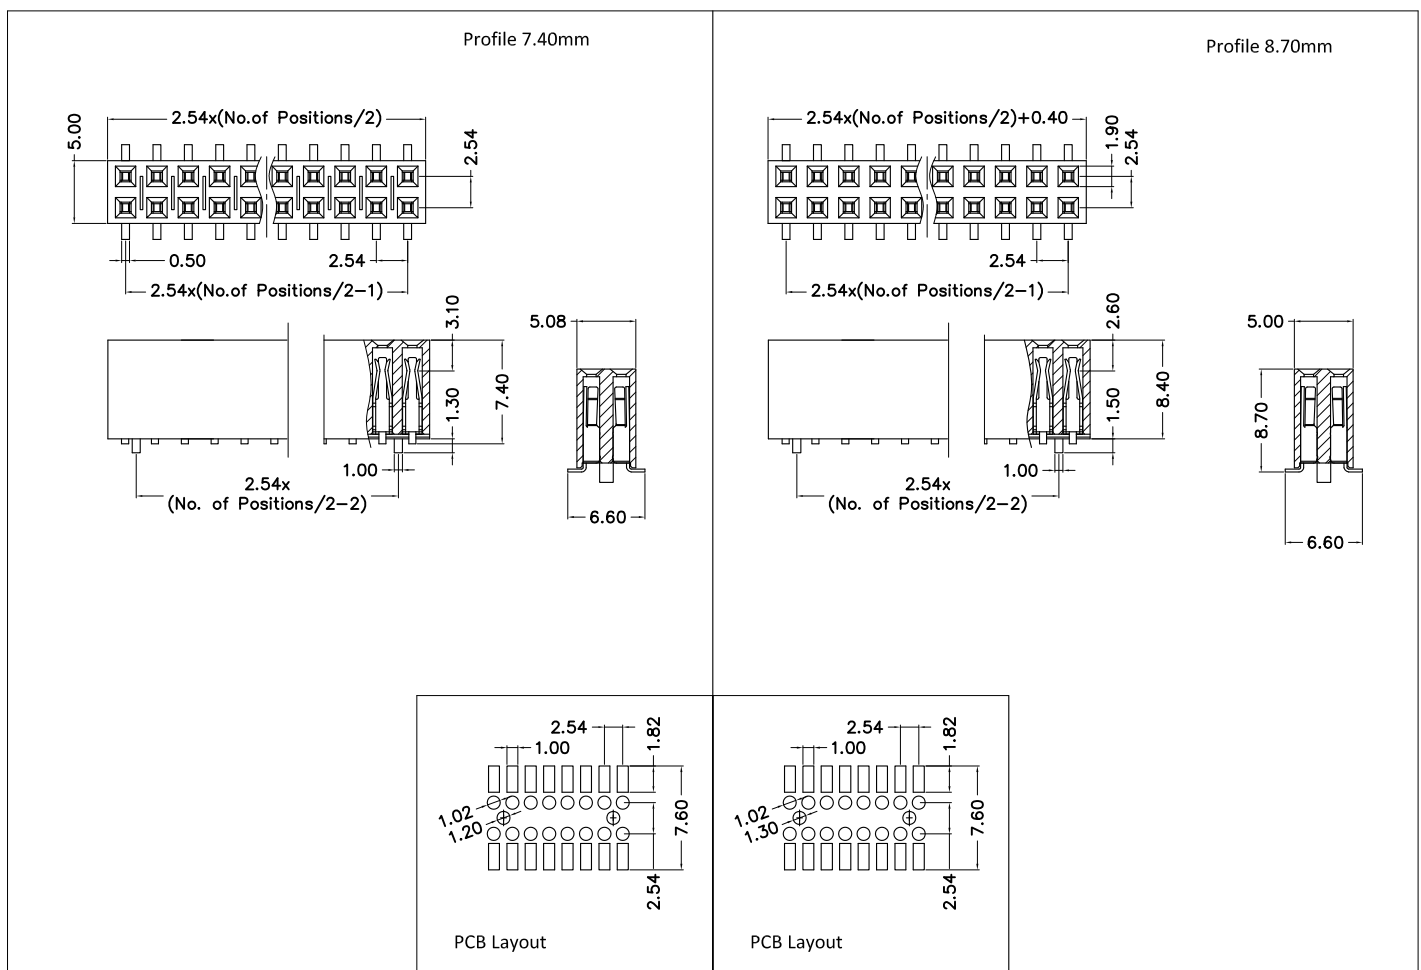

Ordering Information: F43 - XXX - XX - XXX - XX - X - XX

1 --> Series Number:	F43					
2 --> Contact Positions:	4~80Pin: 004~080,					
3 --> Profile option:	10: Profile 7.40mm,		11: Profile 8.70mm,			
4--> Plating option:	100: Full Gold Flash Plated,		500: Tin Plated,		600: Selective Gold Flash Plated	
	610: 10U" selective Gold plated,		615: 15U" selective Gold plated			
	620: 20U" selective Gold plated,		630: 30U" selective Gold plated			
5 --> CAP option:	00: Without CAP,		01: With CAP,			
6 --> Packing option:	2: Tube,		3: T&R,			
7 --> Location Peg option:	00: Without Peg,		01: With Peg,			