
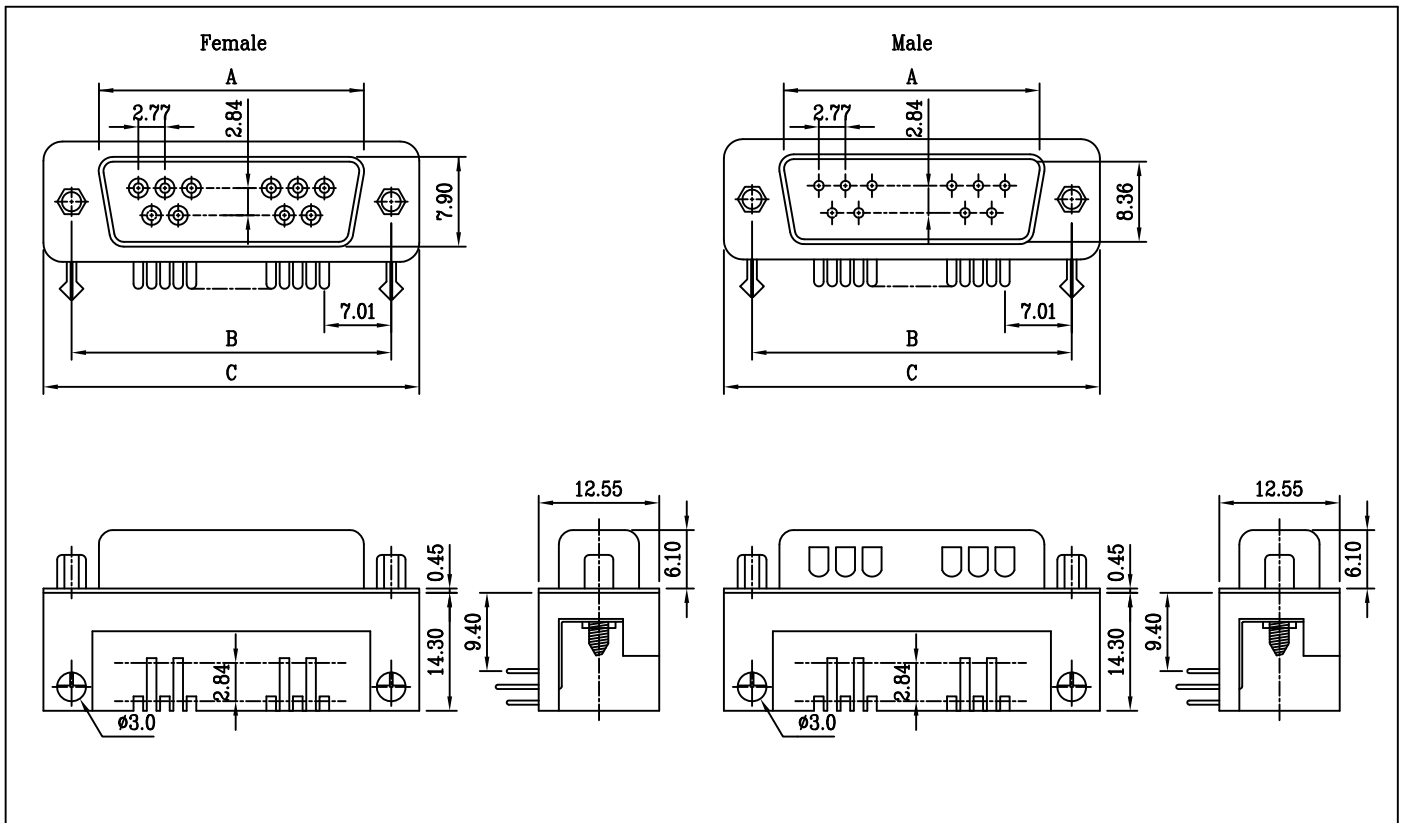


## Economy-EURO-Type with stamped Contacts D-Subminiatur Connector with Dip-Solder Contact 90°R.A.

### Technical data :

Material shell	steel , nickel plating
Insulator	Thermoplastic polyester
Burning properties	self-extinguishing rated 94V-0
Contact	Cooper alloy
Contact surface	gold plated over nickel
Operating Temperature	-55°C to +105°C
Electrical data :	
Current rating :	5A
Working voltage	125VAC
Test voltage	1000V/50hz
Contact resistance	10 <sup>m</sup> Ohm
Insulator resistance	10 <sup>10</sup> Ohm min. 500VDC
Mating cycles	Class 3=min. 50cycles



How to order 107 -    -    -    -    -    -   

Serie-Nr.                      Nr.of Contact                      Terminal Type                      Mounting                      Hexagonal Bolt                      Plating

Nr. of contact	code
09	09
15	15
25	25
37	37

Terminal type	Code
Plug	1
Socket	2

Mounting method	Code
4#40 Thread rivet W/Boardlock	10
Non rivet,Fixed screws W/Boardlock	20
Non thread rivet	30
4#40 Thread rivet only	31
4#40 Thread rivet W/L bracket	40
Non rivet,Fixed screws W/L Bracket	50
4#40 Thread rivet W/4-prong boardlock	60
M3 Thread rivet W/ bracket	70
M3 Thread rivet W/L Boardlock	80
M3 Thread rivet W/4-prong boardlock	90

Plating Option	Code
Full gold Flash plating	10
Selective gold flash plating	60
5u" selective gold plating	05
15u" selective gold plating	15
30u" selective gold plating	30

Dimensions(Male version)			
	A	B	C
9	16.92	24.99	30.81
15	25.25	33.32	39.14
25	38.96	47.04	53.04
37	55.42	63.50	69.32

Dimensions(Female version)			
	A	B	C
9	16.33	24.99	30.81
15	24.66	33.32	39.14
25	38.38	47.04	53.04
37	54.84	63.50	69.32

Hexagonal bolt Option	Code
Loose HEX.Screws 4.8x11.8	10
Fixed HEX.Screws 4.8x11.8	20
Loose HEX.Screws 5.8x12.0	30
Fixed HEX.Screws 5.8x12.0	40
NON-Accessories	50

W.E.